



Continued from Page 8

emission of noise. This can be caused in boundary, mixed or elastohydrodynamic lubrication regimes as well as by the appearance and propagation of cracks,

By calculating the impulse density, conclusions on the existence of damages in bearings can be determined. The adjusted limiting of noise level plays a central role in this procedure, while amplitudes too

***“The noise emerging from metallic contacts between sliding surfaces is measured with emission acoustic sensors and further evaluated by spectral analysis.”***

fracture processes, cavitations phenomena and phase changes, or through plastic deformations. The frequency range of the noise emission extends from audible to ultrasonic. In the audible sound range, environmental interferences are so large that the measuring signal is no longer useful. Therefore, it must be measured in an ultrasonic range, at approximately 100 kHz, where normal operating vibrations of machines and engineering equipment have no influence.

In experiments carried out with axial and radial bearings, a density of impulses was determined in order to evaluate the acoustic signal at high frequencies.

high or too low can generate incorrect diagnostics.

These analyses use only part of the information contained in the AE signal. In the case of the impulse density measurement only the frequency is used, and in the case of the effective value measurement only the amplitude is used. The new procedure principle proposes the use of both frequency and amplitude to prematurely detect bearing failures.

**Sliding Bearing Test Methods and Apparatus**

The test bench consists of a steel shaft supported by two bearings. The test

bearing is located between both supporting bearings, which can be loaded using a hydraulic cylinder with a static loading force of up to 60 kN (13,490 pounds) (Figure 3). The test bench enables testing with half- and complete shells. Speed of the shaft can vary between 150 and 3,000 rpm. Preheating the lubricant from 40°C to 60°C is an option, which would enable the bench to run tests at different hydrodynamic conditions based on the viscosity change.

For the tests, lead-copper-tin-bearings of the type Glyco 40 and bronze-bearings with a diameter of 61.5 mm and a width of 9.5 mm were used.

Measured parameters such as speed, driving torque, loading force, bearing rear temperatures and inlet lubricant temperature were determined. The AE-sensor was mounted on the outside of the housing (Figure 3).

**Test Procedure and Results**

To demonstrate use of AE measurements, the test bearings were run to failure through a combination of means, including reduction of the lubricant volume, a lubricant deficiency, and/or bearing overload. The loading force was increased to the point where asperity contacts began to occur. The possibility of preheating the lubricant facilitated a further reduction of the loading capacity of the bearing due to the viscosity decreasing as temperature rises. In this instance, a bearing failure could be induced by applying slight loading forces.

Figure 4 shows the frequency spectrum for an undamaged surface under hydrodynamic condition and slight load is shown against the frequency spectrum for a failed bearing. An increase of the amplitude in the range between approximately 80 kHz and 140 kHz in the failure can be clearly recognized. This response is characteristic to all the tests conducted and was

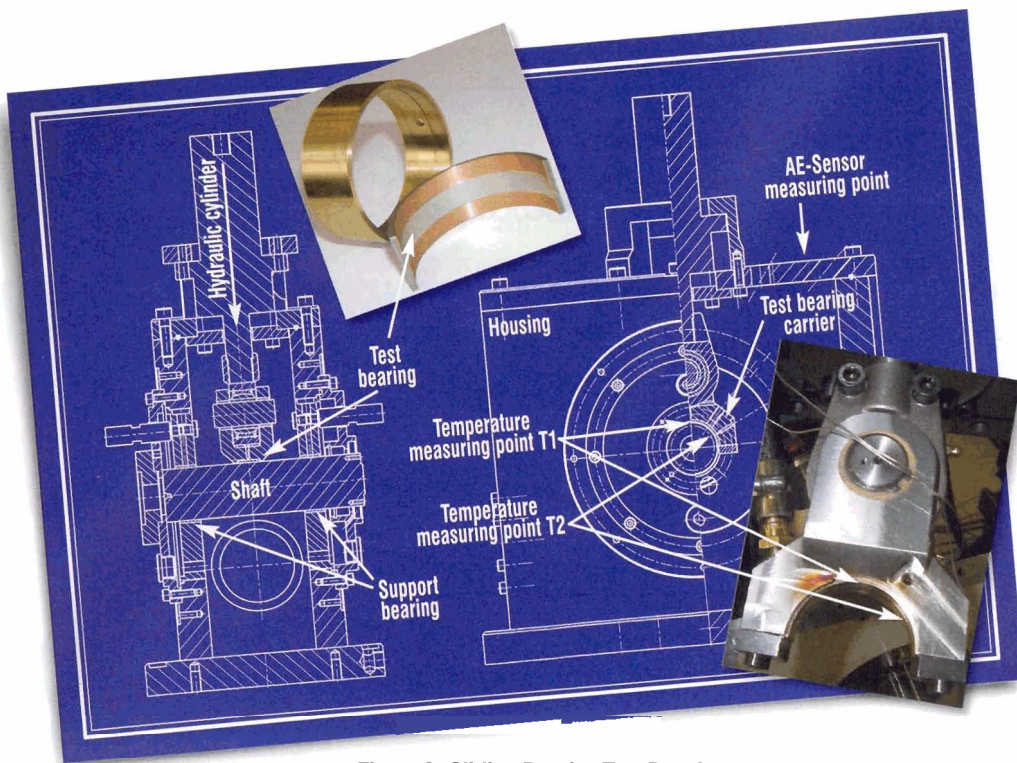


Figure 3. Sliding Bearing Test Bench

observed in the generation of bearing damage. In addition, the slight increase of the amplitude between 100 kHz and 120 kHz is characteristic of the intact running bearings.

In spite of the strong attenuation of the sensor's sensitivity at frequencies up to 50 kHz, strong vibrations below 20 kHz are observed. These vibrations are attributed to the noise emitted by the test bench motor. This range of measurements will not be taken into account in the subsequent signal evaluation.

To document the progress of the bearing failure, the acoustic signal was measured and evaluated continuously every second. The result of the measurement using a Glyco 40 half-shell under slowly increasing continuous load, with a speed of 3,000 rpm, is represented in Figure 5. The lubricant for this test was preheated to 53°C. In Figure 5, the variation in time of every frequency spectral analysis is properly arranged. The progress of the bearing damage can be clearly observed. At the beginning of the measurements, the same frequency pattern is consistent with those seen in Figure 4. Starting at the 16th test series, the amplitude in the range between 80 to 140 kHz is clearly pronounced, showing the beginning of metallic contact between shaft and shell, and eventually leading to a bearing failure.

To establish a relationship between these results and the other measured variables at the test bench, the integral of the frequency spectra values in ranges between 80 kHz and 140 kHz was calculated to characterize the AE signal. In Figure 6, the value of this integral is given next to the progress courses of load, torque and bearing back temperature. The initial bearing damage can be recognized where the loading force at the bearing was gradually increased up to 4.5 kN. This corresponds with the abrupt increase of the torque signal. Following a slight delay,

the bearing back temperature increases strongly and reaches a maximum value of 215°C. The increase of the composite acoustic spectral emission precedes the increase observed in the torque and temperature curve. This procedure clarifies that with the AE signal a bearing failure can be recognized seconds before it occurs. After testing, the sliding bearing was classified as defective.

Further analysis is required to fully explain the extent to which each of the measured variables influence the acoustic signal. All of the variables - shell material, speed, temperature and lubricant viscosity - are of interest. Further investigations presented similar results although bearing shells with different diameters and materials were used.

*Continued on Page 12*

# Particle Counting Solutions<sup>T</sup> for Every Application

## Portable Particle Counter

Fully portable unit for both bottle sampling (non-pressurized) as well as high pressure sampling up to 420 bar (6000 psi)

- Auto sensing power supply for 110 to 230 volts as well as internal battery operation
- stores up to 1500 profiles
- Minimess and standard connectors (DIN 2353)
- Operates with viscosities up to 400 cstokes with an option up to 1000 cstokes
- Easy to use download software and compatibility with all Pamas software
- Built in thermal printer




All systems are available with the new ISO 11171 (NIST) calibration, ISO 4402 (ACFTD) calibration, or both.

Please visit our web-site to get more information on our other products.

Bottle Sampling



Online Sampling



Or visit our Web site for contact information in your part of the world at [www.pamas.de](http://www.pamas.de)

Pamas USA  
Clay Bielo  
1408 S. Denver Avenue, Tulsa, OK 74119  
tel 918-743-6762 • fax 918-743-6917  
[claybielo@earthlink.net](mailto:claybielo@earthlink.net)

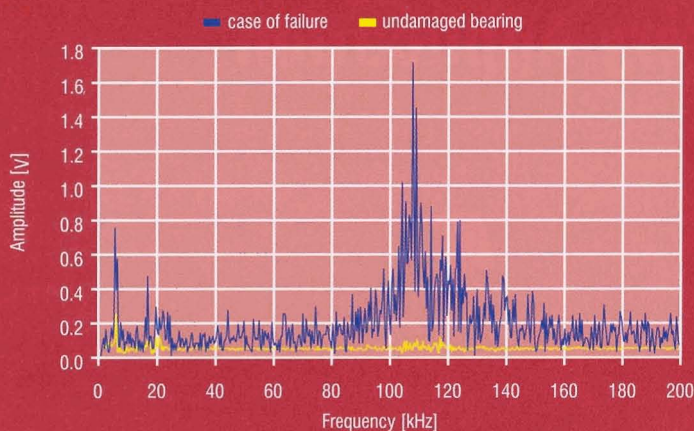


Figure 4. Frequency Spectra of Undamaged Bearings

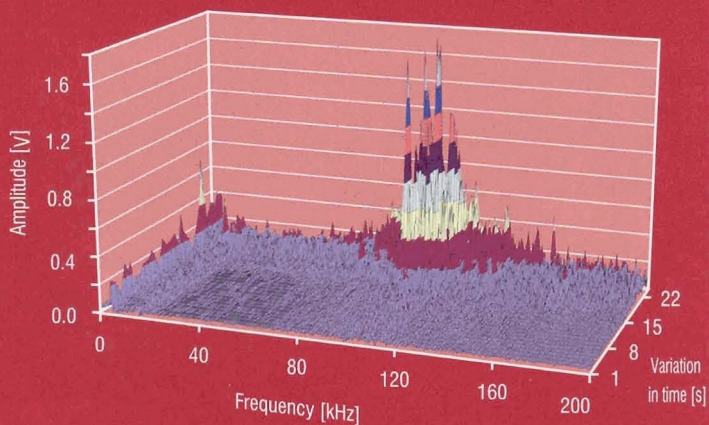


Figure 5. Time Variation of the Frequency Spectra

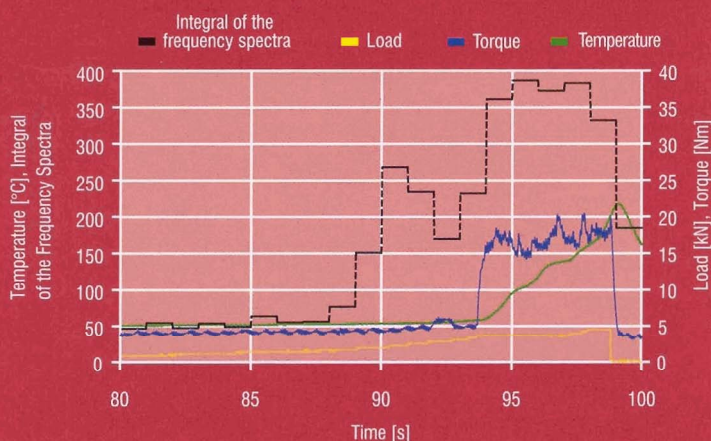


Figure 6. Result of Static Applied Load Test on Half-shell Glyco 40 Bearing

## Conclusions

These studies demonstrated that acoustic emission analysis is an appropriate measurement procedure to detect incipient failures at sliding bearings through the correlation between the emitted acoustic signal and the energy dissipated in the sliding metallic contacts. Damage can be recognized independently of contact geometry, sliding speed, shell-material, rear shell temperature, and lubricant temperature with a significant increase of the amplitude in the frequency range around 100 kHz. A detailed examination of the variables, which are normally involved in the friction process, determined that physical and mechanical parameters of the friction surface, where steel surfaces were involved, did not generate appreciably differing results.

Bearing damage could always be recognized before the initial stage of a failure which was expressed by increasing torque. The monitoring of the bearing back temperature, which is often used to supervise bearings, clearly reacted later than the AE signal. On the basis of these severities, this measurement procedure shows a large potential for a practical use in the early recognition of bearing failures. Acoustic emission analysis also has an extra advantage with the AE-sensor. It can be mounted far away from the metallic contacts and therefore outside of the housing. Relative to engine analysis, there are no changes required for the engine compartment, cabling or housing configurations. The transferability of these results to nonstationary loaded bearings, for example in combustion engines, remains uncertain and its investigation could become the main purpose for further works.

The success of a continuous surveillance system will depend on its configuration relative to the specific mechanical interactions. Machine-specific data collection parameters and data management functions will need to be developed to enable integration of the right criteria, and identification of incipient failure. For continuous surveillance systems, significant storage and processing capacity is required to manage the relatively large amounts of data and processing algorithms. **POA**

### Editor's Note:

This article with complete references can be viewed online at [www.practicingoilanalysis.com](http://www.practicingoilanalysis.com)

### Would You Like to Contribute?

Are you a technical expert? We want to publish your oil analysis article in *Practicing Oil Analysis*. To submit a technical article, review the guidelines at [www.practicingoilanalysis.com](http://www.practicingoilanalysis.com) and send your case study to [jkucera@norcia.com](mailto:jkucera@norcia.com).