



This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Technical Note: Field experiences using UV/VIS sensors for high-resolution monitoring of nitrate in groundwater

M. Huebsch^{1,2}, F. Grimmeisen¹, M. Zemann¹, O. Fenton², K. G. Richards²,
P. Jordan³, A. Sawarieh⁴, P. Blum¹, and N. Goldscheider¹

¹Karlsruhe Institute of Technology (KIT), Institute of Applied Geosciences (AGW),
Kaiserstr. 12, 76131 Karlsruhe, Germany

²Teagasc, Environment Research Centre, Johnstown Castle, Co. Wexford, Ireland

³University of Ulster, School of Environmental Sciences, Cromore Road,
Coleraine, BT52 1SA, Northern Ireland

⁴National Resources Authority, Amman, Jordan

Received: 30 September 2014 – Accepted: 9 October 2014 – Published: 4 November 2014

Correspondence to: F. Grimmeisen (felix.grimmeisen@kit.edu)

Published by Copernicus Publications on behalf of the European Geosciences Union.

HESSD

11, 12291–12314, 2014

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

Two different in-situ spectrophotometers are compared that were used in the field to determine nitrate-nitrogen ($\text{NO}_3\text{-N}$) concentrations at two distinct spring discharge sites. One sensor was a double wavelength spectrophotometer (DWS) and the other a multiple wavelength spectrophotometer (MWS). The objective of the study was to review the hardware options, determine ease of calibration, accuracy, influence of additional substances and to assess positive and negative aspects of the two sensors as well as troubleshooting and trade-offs. Both sensors are sufficient to monitor highly time-resolved $\text{NO}_3\text{-N}$ concentrations in emergent groundwater. However, the chosen path length of the sensors had a significant influence on the sensitivity and the range of detectable $\text{NO}_3\text{-N}$. The accuracy of the calculated $\text{NO}_3\text{-N}$ concentrations of the sensors can be affected, if the content of additional substances such as turbidity, organic matter, nitrite or hydrogen carbonate significantly varies after the sensors have been calibrated to a particular water matrix. The MWS offers more possibilities for calibration and error detection, but requires more expertise compared with the DWS.

1 Introduction

Present and predicted future shortage of drinking water is a worldwide problem and global population growth increases the demand for high-quality potable water (Schiermeier, 2014). Thus, the importance of the protection of drinking water quality is acknowledged worldwide by the implementation of international programs such as the European Union (EU) Water Framework Directive (OJEC, 2000) and daughter directives, the US National Water Quality Assessment Program (NAWQA) and Maximum Daily Load Program (TMDL) (Elshorbagy et al., 2005) or the Australian National Water Quality Management Strategy (ANZECC, 2000). Built into these regulations is a fundamental need to monitor the quality of drinking water supplies. However, especially in karst and/or fractured aquifers, water quality can change rapidly in a time frame from

HESSD

11, 12291–12314, 2014

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



hours to days (Huebsch et al., 2014; Mahler et al., 2008; Pronk et al., 2009). Nitrate (NO_3^-) is particularly noted as being a risk to human health when in high concentrations in source drinking water (L'Hirondel, 2002) and also contributes significantly to eutrophication of water (Stark and Richards, 2008).

5 High resolution flow and nitrate-nitrogen ($\text{NO}_3\text{-N}$) concentration data from short residence time aquifers enable an improved understanding of the mobilisation/dilution dynamics in karst aquifers (Huebsch et al., 2014) and to prevent negative consequences from $\text{NO}_3\text{-N}$ concentrations breaching the maximum allowable concentration (MAC). In the EU for example, the MAC is $11.3 \text{ mg NO}_3\text{-NL}^{-1}$, to prevent health concerns (Knobeloch et al., 2000), abortion to cattle or toxicity in livestock (Di and Cameron, 10 2002).

Photometrical ultraviolet/visible light (UV/VIS) sensors have been first employed at municipal wastewater treatment plants to control $\text{NO}_3\text{-N}$ effluent concentrations (Langergraber et al., 2003; Rieger et al., 2004). In addition, UV/VIS sensors have been 15 recently used in groundwater and surface water applications to assess highly resolved $\text{NO}_3\text{-N}$ concentrations (Pu et al., 2011; Wade et al., 2012). The technique gives the opportunity to observe trends and rapid changes of $\text{NO}_3\text{-N}$ whilst using a solid-state methodology without reagents. Thus, less frequent calibration and maintenance than other common in-situ methods such as ion sensitive electrode applications is required 20 (Bende-Michl and Hairsine, 2010).

The technical note provides an assessment of two different spectrophotometric sensors, i.e. a double wavelength spectrophotometer (DWS) and a multiple wavelength spectrophotometer (MWS) used at field sites in Ireland and Jordan, respectively. The following issues are addressed in the present study: hardware options, ease of calibration, accuracy, influence of additional substances, positive and negative aspects of the 25 two sensors, troubleshooting and trade-offs.

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



2 Materials and methods

NO₃-N dissolved in water absorbs light below 250 nm (Armstrong, 1963) although the specification for NO₃-N determination due to absorbance varies in the literature. Karlsson et al. (1995) and Drolc and Vrtovšek (2010) describe specific parameter determination of NO₃-N at 205 nm, Thomas et al. (1990) at 205 to 210 nm, Ferree and Shannon (2001) at ~ 224 nm and Armstrong (1963) at 227 nm. The relationship between absorbance, i.e. extinction of light (E) at a specific wavelength, and NO₃-N concentration is linear and follows the Lambert Beer's Law (Eq. 1):

$$E = \log \frac{I_0}{I}, \quad (1)$$

where I_0 is the light intensity emitted by the sensor lamp and I is the light intensity after the light has passed the water matrix. Hence, physically increased light absorption of NO₃-N dissolved in water correlates to increased NO₃-N concentrations. However, in natural water, additional substances other than NO₃-N occur. Turbidity has a major influence on light absorbance as the presence of suspended material such as organic particles can lead to scattering effects on the recorded absorption values of NO₃-N (Chýlek, 1977; Rieger et al., 2008; Vaillant et al., 2002). In addition, substances that absorb in the investigated spectral range such as nitrite-nitrogen (NO₂-N) or humic acids can lead to superposition of absorbance (Kröckel et al., 2011). The consequences are that multivariate data analysis approaches are needed to determine NO₃-N, such as principal component analysis or partial least square regression (Dahlén et al., 2000; Gallot and Thomas, 1993a; Karlsson et al., 1995; Macintosh et al., 2011).

In this study, a DWS (NITRATAX plus sc, Hach Lange GmbH, Germany) and a MWS (s::can spectro::lyser™, s::can Messtechnik GmbH, Austria) were used (Fig. 1). The DWS was installed in a flowing spring emergence (Spring A) in south-west Ireland and the MWS in a flowing spring emergence (Spring B) in Jordan. The study sites are described in more detail in a previous study of Huebsch et al. (2014) and Grimmeisen

HESSD

11, 12291–12314, 2014

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



et al. (2014), respectively. Both springs discharge karst aquifers; however, Spring A is located in an agricultural catchment and Spring B in an urban catchment.

The DWS measures UV absorbance at a wavelength of 218 nm at a measuring receiver (EM – element for measuring) and at 228 nm at a reference receiver (ER – element for reference). The recorded measurements at two different wavelengths at EM and ER are designed to compensate interference of organic and/or suspended matter (Thomas et al., 1990) by interpreting the difference between the absorbance values at EM and ER which is expressed by ΔE . In comparison, a UV sensor using only one single wavelength is not able to compensate additional interferences (van den Broeke et al., 2006). The MWS measures absorbance at 256 different wavelengths between 200 and 750 nm within 15 s (Rieger et al., 2004). Both sensors feature the possibility to export the monitored absorbance values and the calculated concentrations. As a result of the different measuring methods, the DWS makes no difference between $\text{NO}_3\text{-N}$ and $\text{NO}_2\text{-N}$ and therefore, reports the $\text{NO}_x\text{-N}$ concentration (or total oxidised nitrogen, TON) instead of $\text{NO}_3\text{-N}$ (Drolc and Vrtovšek, 2010) and assumes negligible $\text{NO}_2\text{-N}$. Due to the range of measurements in the scan, the MWS is able to provide the specific $\text{NO}_3\text{-N}$ concentration. $\text{NO}_3\text{-N}/\text{NO}_x\text{-N}$ concentrations observed with the DWS and MWS were compared with $\text{NO}_3\text{-N}/\text{NO}_x\text{-N}$ concentrations determined in the laboratory. Water samples used for determination of $\text{NO}_3\text{-N}/\text{NO}_x\text{-N}$ concentrations were measured in the water in situ with the sensors. For comparison, water samples were also filtered using a $0.45\ \mu\text{m}$ micropore membrane to determine $\text{NO}_3\text{-N}/\text{NO}_x\text{-N}$ concentrations in the laboratory. For determination Aquakem 600A (Thermo Scientific, Finland) and Dionex ICS-2100 (Thermo Scientific, Finland) was used, respectively. The DWS was installed in July 2011 in spring A. $\text{NO}_x\text{-N}$ concentrations were fluctuating approx. between 10 and $14\ \text{mg L}^{-1}$ until September 2014. The MWS was installed in spring B in May 2011 and observed approx. minimum and maximum concentrations of 12 and $15\ \text{mg NO}_3\text{-N L}^{-1}$ until September 2014, respectively.

There are several sensor options available for the DWS and the MWS from the manufacturers. The DWS is available with three different path-lengths of 1, 2 and 5 mm,

HESSD

11, 12291–12314, 2014

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3 Results and discussion

3.1 Hardware options

Table 1 provides an overview of the available hardware and software options, output format, maintenance, warranty and costs of the DWS and MWS. Important differences between both sensors despite the measuring method are: (1) the cleaning device for the MWS is offered as an additional hardware option, (but highly necessary in natural waters), whereas the DWS is already equipped with a wiper for cleaning, (2) the purchase price for the DWS is lower than the MWS (~ 16 000 and EUR 20 000 excluding VAT in 2014, respectively). Both sensors report the raw dataset of the absorbance measurements, which is based on the two different measuring methods (DWS: two wavelengths; MWS: full absorbance spectrum). The investment costs for both sensors are based on the advanced and comparable version of both manufacturers, which means that first, turbidity can be compensated, second, the raw dataset is included and third, error detection for both sensors is possible afterwards. The costs are based on elementary equipment: sensor, cable and basic handling device. Additional upgrades such as remote control, advanced handling device and flow-through unit, which ensures sufficient flow through the measuring slit, are also available which lead to an increase in pricing.

3.2 Ease of calibration and accuracy after calibration

Figure 2 shows the accuracy of the two sensors immediately after calibration using the available calibration methods. The DWS was calibrated with standard solutions, which provided a good result for the monitored water in the area (spring water A; Fig. 3a). The root mean square error (RMSE) to the ideal straight line of $y = x$ (measured sensor concentrations vs. concentrations measured in the laboratory) was 0.42. For the MWS, higher accuracy was reached by using water samples from adjacent springs, which had a higher affinity to the water matrix of the monitored spring than standard

HESSD

11, 12291–12314, 2014

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



solutions (spring water B; Fig. 3b). These water samples were also used to test the accuracy of the sensor. The best results were obtained with the on-site calibration using a second order polynomial function (local 2; Fig. 2d) including a RMSE of 0.36. For off-site calibration (Fig. 2b) and on-site calibration with a linear function (local 1; Fig. 2c) RMSE was 2.11 and 0.82, respectively. In addition, Fig. 2 shows that the accuracy of the sensor decreases with higher NO₃-N concentrations, especially for the two point calibration of the DWS sensor and the off-site calibration of the MWS. In general, the precision of the sensor readings are dependent on the sensor path length (Kröckel et al., 2011). The MWS with 35 mm path length becomes less accurate with higher concentrations, as the optimal measurement range for 35 mm path length is 0.02 to 10 mg L⁻¹ NO₃-N. However, the manufacturer claims the NO₃-N concentration range between 10 to 15 mg L⁻¹ to be sufficient and applicable for monitoring. The path length of 35 mm was recommended for including additional measuring options such as turbidity, TOC and DOC. The accuracy of both sensors is dependent on (a) the selected path length for measuring the concentrations, (b) a comparable and similar water matrix to the standard solution used for calibration and/or (c) the option to use local water having minimum and maximum NO₃-N concentrations characteristic for the NO₃-N measured with similar matrix structure for calibration. As the last two points are rather challenging in the field, we suggest calibrating the sensors with water from the field site. If necessary a number of those waters can be used that are diluted or concentrated with standard solution to get approximate representative minimum and maximum values for calibration. However, after calibration changes of the water matrix in a natural environment due to e.g. mixing of different groundwater can lead to less qualitative results. Complex changes of the water matrix can affect the “trueness” and precision of the sensor readings, because the sensor is calibrated to a specific water composition (Langergraber et al., 2004b; Maribas et al., 2008; Stumwöhrer et al., 2003).

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

3.3 Influence of additional substances

In natural waters, the absorption spectra can vary significantly due to, for example, different contents of natural organic matter (Thomas and Burgess, 2007) and so interference effects of substances that are absorbing light in a similar wavelength range to $\text{NO}_3\text{-N}$ are possible (Macintosh et al., 2011). Figure 3 shows absorbance spectra and first derivative of four different water samples, which were determined with the MWS. Spring waters A and B were constantly monitored during the research period for the DWS and MWS, respectively. Spring water A was sampled in a karst spring in an agricultural dominated area in South Ireland, whereas spring water B occurs in an urbanized catchment and is continuously contaminated by faecal matter from sewer seepage of Salt, a city in Jordan. For Fig. 3, the spring water samples used have a similar $\text{NO}_3\text{-N}$ concentration of 11.4 and 11.1 mg L^{-1} , respectively. For comparison, two other samples with similar $\text{NO}_3\text{-N}$ concentrations of 3.9 and 4.1 mg L^{-1} , respectively, were plotted: a sample of mains water of the Jordanian city, a water mix of spring, river and pond water sampled and mixed at the area in South Ireland mentioned above. The mains water is a mix of treated spring and river water, whereas the spring-river-pond water is a mix of water from spring water A, a nearby river and water from a pond. In Fig. 3a, the high absorbance values below 250 nm specify the presence of $\text{NO}_3\text{-N}$ in the water. Isobestic points are an indicator for different matrix compositions of the samples (Gallot and Thomas, 1993b; Vaillant et al., 2002). Other substances such as $\text{NO}_2\text{-N}$, HCO_3^- or dissolved organic matter in water can result in a superposition of the absorbance values (Kröckel et al., 2011; Langergraber et al., 2004a; van den Broeke et al., 2006), even if the maximum absorbance values of those substances occur at different wavelengths than $\text{NO}_3\text{-N}$ absorbance. In Fig. 3, the water mix of spring, river and pond water has higher absorbance values than the other samples, although the $\text{NO}_3\text{-N}$ content is low in relation to spring waters A and B. This can be explained by the influence of interfering substances other than $\text{NO}_3\text{-N}$, which are leading to superposition of the absorbance values and are clearly indicated by increased absorbance values

above 250 nm. The first derivative allows a more detailed interpretation of the NO₃-N concentration: samples with similar NO₃-N concentration follow a much more similar curve progression (Fig. 3b) than the absorbance spectra (Fig. 3a). In addition, positive values in the majority of the first derivative between 220 and 240 nm indicate that the light or energy source is damaged and needs to be replaced. The MWS uses derivative methods, amongst others, for calculating the NO₃-N concentrations, whereas the DWS records the absorbance values at two wavelengths (218 and 228 nm) and defines the NO_x-N concentration by using the difference between those wavelengths. This means that the DWS sensor takes the slope into account as well as the interval of the absorbance difference at the two wavelengths, which implies that superposition by additional substances are considered. Nevertheless, this and other studies indicate problems due to superposition of substances (Maribas et al., 2008).

3.4 Positive and negative aspects of the two sensors

Table 2 gives an overview of positive and negative aspects of the two sensors regarding installation, requirements, calibration and error detection. Installation of both sensors is straightforward. The manufacturer of the DWS supplies L-brackets for installation of the instrument in the correct position. For both sensors, a mains power source is required for operation, which may be a problem for field applications. A power supply of 230vAC is sufficient. Positive aspects of both sensors are that the calibration intervals can be performed on a long term basis which is an asset compared to other NO₃-N detection methods (Beaupré, 2010). Calibration can be simple, if the water matrix is similar to standard solutions provided by the manufacturer, but more complicated if the water matrix differs significantly from standard solutions or if collection of water samples representing a broad range of NO₃-N concentrations of the monitored water is difficult. The MWS offers more options for calibration than the DWS, which can lead to higher precision (Fig. 2). In contrast, the on-site calibration methods require more expertise and, therefore, can be time consuming. Even if calibration intervals are on a long-term basis, it is advisable to perform regular controls such as regular conventional

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



measurements of $\text{NO}_3\text{-N}$ concentrations to ensure the reliability of the data provided by the sensor. In addition, the manufacturer of the DWS advises to return the sensor to the manufacturer on an annual basis to refresh the four-point calibration, replace seals and check the sensor. Error detection is possible with both sensors, but costs more compared to similar sensor types provided by the manufacturers with no error detection. The manufacturer gives advice to check the light source every two years as this has to be renewed. Because the MWS measures the full absorption range, more detailed information of possible disturbances can be utilised.

3.5 Troubleshooting and trade-offs

During operation of both sensors, two difficulties occurred that affected the reliability of the recorded $\text{NO}_x\text{-N}$ concentrations (Figs. 4 and 5). Figure 4 illustrates discrepancies between wavelength measurements and calculated $\text{NO}_x\text{-N}$ concentrations above 12.12 mg L^{-1} of the DWS. In Fig. 4a, the raw dataset of the difference between absorbance values at 218 and 228 nm, ΔE , is shown. In Fig. 4b, the reported $\text{NO}_x\text{-N}$ concentrations are illustrated, which were calculated from the raw dataset and followed an inverse trend if $\text{NO}_x\text{-N}$ concentrations were above 12.12 mg L^{-1} , contrary to Lambert Beer's Law. The manufacturer assumed a software problem and the probe had a complete control check after the detection of the error. The manufacturer's background calibration was therefore refreshed and the software and light source were replaced. However, because the raw absorption dataset was recorded, it was possible to eliminate the error retrospectively and quantitatively by using a regression line, which was extrapolated from the correct calculated values (Fig. 4c).

During operation of the MWS, suspicious readings were recorded, which occurred immediately after installation due to a technical mistake (Fig. 5). The sensor was first installed in a vertical position without a cleaning device. This led to an accumulation of suspended material at the measuring slit. Consequently, the recorded values for turbidity increased. If the turbidity signal reaches values at or above 20 FTU (Formazin Turbidity Units), determined $\text{NO}_3\text{-N}$ values are not reliable. For turbidity ≥ 20 FTU the

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



recorded NO₃-N values showed a decreasing trend. At turbidity ≥ 80 FTU no NO₃-N concentrations were reported. The sensor was cleaned on a weekly basis, which explains the periodic, weekly pattern of turbidity and NO₃-N values. After error detection, the sensor was reinstalled in a horizontal position with a downwards orientated measuring path. However, it was necessary to purchase a cleaning device from the manufacturer as fouling of the measuring slit still disturbed the readings. The manufacturer offers the sensor with the purchase of an air pressure cleaning device as an option (Table 1). In contrast, the DWS uses a wiper for cleaning, which is already included in the standard probe. Hence, we strongly recommend purchasing the cleaning device together with the MWS sensor, if the system is operated in natural waters.

During operation of the DWS the computer system was unstable and shut down several times causing data gaps of several hours, until the system started recording again. Maribas et al. (2008) also describes disturbances of the MWS measurements caused by air bubbles in the water. They state that where bubbles exist in the water, the measuring path needs to be orientated to allow the bubbles to pass. Kröckel et al. (2011) advises to use a filter such as a flow through-unit to prevent inaccurate measurements due to air bubbles (Table 1) although these can be unreliable in highly turbid waters. One should also notice that reliable measurements of both sensors cannot be determined, if the sensor measurements are affected by saline water. If the measured water is influenced by water with salt content, for example due to flooding and close installation to the coast or in deeper wells, the determination of NO₃-N by the UV sensors would be affected as salt has a strong UV absorption in the NO₃-N absorption range (Kröckel et al., 2011). In addition, in highly heterogeneous environments, such as karst aquifers, rapid groundwater fluctuations and temporary activated conduit inlets might result in mixing of waters with different water quality and therefore matrix. This can have an effect on the accuracy of the NO₃-N concentration dataset. Even though the MWS measures over the full absorption spectra, detections remain difficult in that case and might result in less accurate concentrations. This could be a problem especially if absolute values instead of general water quality trends are necessary in a rapidly

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

changing environment. However, both sensors offer a reliable detection of highly resolved $\text{NO}_x\text{-N}$ concentration trends with low maintenance effort, which is an asset in the field compared to other common in-situ methods such as ion sensitive electrode applications (Bende-Michl and Hairsine, 2010).

4 Conclusions

Both sensors were efficient for continuously monitoring highly time-resolved $\text{NO}_3\text{-N}$ in groundwater emergences (i.e. flowing water) in this study and deemed fit for purpose. Although, the calibration procedure for the DWS is easier than for the MWS, the wavelength spectra of the latter provides a more detailed insight of the absorption and consequently improved $\text{NO}_3\text{-N}$ calculations. If $\text{NO}_2\text{-N}$ is a major concern in the studied water, the MWS should be chosen for monitoring, as the DWS does not distinguish between $\text{NO}_3\text{-N}$ and $\text{NO}_2\text{-N}$. For ease of use and with an emphasis on measuring TON (where $\text{NO}_2\text{-N}$ is known to be negligible), the DWS could be also considered. In addition, the path length of the two sensors should be carefully chosen. The chosen path length is significant for the accuracy of the sensor measurements at a specific measurement range. It is reasonable to conclude that high-resolution UV/VIS monitoring will greatly contribute to a better understanding of groundwater processes in the future.

Acknowledgements. The authors would like to acknowledge the Teagasc Walsh Fellowship scheme for funding the study in Ireland and the German federal Ministry of Education and Research (BMBF) for sponsoring the SMART-project (grant numbers: 02WM1079-1086, 02WM1211-1212) for the study in Jordan. Furthermore, we would like to thank the Jordanian Ministry of Water and Irrigation and the local water authority of Salt city for their support. We also gratefully acknowledge Tristan G. Ibrahim, formerly of Teagasc, the farm staff at Dairygold Farm and Brendan Horan for supporting the field work in Ireland as well as the staff of Johnstown Castle water laboratories for analysing groundwater samples.

HESSD

11, 12291–12314, 2014

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The service charges for this open access publication have been covered by a Research Centre of the Helmholtz Association.

References

- 5 Armstrong, F.: Determination of nitrate in water ultraviolet spectrophotometry, *Anal. Chem.*, 35, 1292–1294, 1963.
- Australian and New Zealand Environment and Conservation Council – ANZECC: Australian Water Quality Guidelines for Fresh and Marine Waters, 1–314, available at: <http://www.environment.gov.au/system/files/resources/53cda9ea-7ec2-49d4-af29-d1dde09e96ef/files/nwqms-guidelines-4-vol1.pdf> (last access: 3 November 2014), 2000.
- 10 Beaupré, M.: Characterization of On-line Sensors for Water Quality Monitoring and Process Control, M.S. thesis, Faculté des Sciences et Génie Université Laval Québec, Québec, 1–151, 2010.
- Bende-Michl, U. and Hairsine, P. B.: A systematic approach to choosing an automated nutrient analyser for river monitoring, *J. Environ. Monitor.*, 12, 127–134, 2010.
- 15 Chýlek, P.: Light scattering by small particles in an absorbing medium, *J. Opt. Soc. Am.*, 67, 561–563, doi:10.1364/josa.67.000561, 1977.
- Dahlén, J., Karlsson, S., Bäckström, M., Hagberg, J., and Pettersson, H.: Determination of nitrate and other water quality parameters in groundwater from UV/Vis spectra employing partial least squares regression, *Chemosphere*, 40, 71–77, 2000.
- 20 Di, H. J. and Cameron, K. C.: Nitrate leaching in temperate agroecosystems: sources, factors and mitigating strategies, *Nutr. Cycl. Agroecosys.*, 64, 237–256, doi:10.1023/a:1021471531188, 2002.
- Drolc, A. and Vrtovšek, J.: Nitrate and nitrite nitrogen determination in waste water using on-line UV spectrometric method, *Bioresource Technol.*, 101, 4228–4233, doi:10.1016/j.biortech.2010.01.015, 2010.
- 25 Elshorbagy, A., Teegavarapu, R. S., and Ormsbee, L.: Total maximum daily load (TMDL) approach to surface water quality management: concepts, issues, and applications, *Can. J. Civil Eng.*, 32, 442–448, 2005.

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Ferree, M. A. and Shannon, R. D.: Evaluation of a second derivative UV/visible spectroscopy technique for nitrate and total nitrogen analysis of wastewater samples, *Water Res.*, 35, 327–332, doi:10.1016/S0043-1354(00)00222-0, 2001.

Gallot, S. and Thomas, O.: State of the art for the examination of UV spectra of waters and wastewaters, *Int. J. Environ. An. Chem.*, 52, 149–158, doi:10.1080/03067319308042856, 1993a.

Gallot, S. and Thomas, O.: Fast and easy interpretation of a set of absorption spectra: theory and qualitative applications for UV examination of waters and wastewaters, *Fresen. J. Anal. Chem.*, 346, 976–983, 1993b.

Grimmeisen, F., Sawarieh, A., Zemann, M., Klinger, J., Göppert, N., and Goldscheider, N.: Water quality monitoring for groundwater protection in urban karst aquifers in a semi-arid climate, DIKTAS Conference, Karst without Boundaries, 11–15 June 2014, Tebinje, Bosnia & Herzegovina, 2014.

Huebsch, M., Fenton, O., Horan, B., Hennessy, D., Richards, K. G., Jordan, P., Goldscheider, N., Butscher, C., and Blum, P.: Mobilisation or dilution? Nitrate response of karst springs to high rainfall events, *Hydrol. Earth Syst. Sci. Discuss.*, 11, 4131–4161, doi:10.5194/hessd-11-4131-2014, 2014.

Karlsson, M., Karlberg, B., and Olsson, R. J.: Determination of nitrate in municipal waste water by UV spectroscopy, *Anal. Chim. Acta*, 312, 107–113, 1995.

Knobeloch, L., Salna, B., Hogan, A., Postle, J., and Anderson, H.: Blue babies and nitrate-contaminated well water, *Environ. Health Persp.*, 108, 675–678, doi:10.2307/3434890, 2000.
Kröckel, L., Schwotzer, G., Lehmann, H., and Wieduwilt, T.: Spectral optical monitoring of nitrate in inland and seawater with miniaturized optical components, *Water Res.*, 45, 1423–1431, 2011.

L'Hirondel, J.: *Nitrate and Man: Toxic, Harmless Or Beneficial?*, CABI, Wallingford, UK, 2002.

Langergraber, G., Fleischmann, N., Hofstaedter, F., and Habert, R.: A multivariate calibration procedure for UV/VIS spectrometric quantification of organic matter and nitrate in wastewater, *Water Sci. Technol.*, 47, 63–71, 2003.

Langergraber, G., Fleischmann, N., Hofstaedter, F., and Weingartner, A.: Monitoring of a paper mill wastewater treatment plant using UV/VIS spectroscopy, *Water Sci. Technol.*, 1, 9–14, 2004a.

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Langergraber, G., Fleischmann, N., Hofstaedter, F., Weingartner, A., and Lettl, W.: Detection of (Unusual) Changes in Wastewater Composition Using UV/VIS Spectroscopy, *Water Intelligence Online*, London, UK, 2004b.

Langergraber, G., Gupta, J. K., Pressl, A., Hofstaedter, F., Lettl, W., Weingartner, A., and Fleischmann, N.: On-line monitoring for control of a pilot-scale sequencing batch reactor using a submersible UV/VIS spectrometer, *Water Sci. Technol.*, 10, 73–80, 2004c.

Macintosh, R. C., Cassidy, R., Jordan, P., Arnscheidt, J., and McCarthy, V.: Testing a New Technology for Monitoring Nutrients in Rivers, STRIVE 81 EPA, Wexford, Ireland, 2011.

Mahler, B. J., Valdes, D., Musgrove, M., and Massei, N.: Nutrient dynamics as indicators of karst processes: comparison of the Chalk aquifer (Normandy, France) and the Edwards aquifer (Texas, USA), *J. Contam. Hydrol.*, 98, 36–49, doi:10.1016/j.jconhyd.2008.02.006, 2008.

Maribas, A., Da Silva, M. D. C. L., Laurent, N., Loison, B., Battaglia, P., and Pons, M.-N.: Monitoring of rain events with a submersible UV/VIS spectrophotometer, *Water Sci. Technol.*, 57, 1587–1593, 2008.

Official Journal of the European 871 Communities – OJEC: Directive 2000/60/EC of the European Parliament and of the Council of 23rd October 2000 Establishing a Framework for Community Action in the Field of Water Policy, <http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX:32000L0060> (last access: November 2014), 1–72, 2000.

Pronk, M., Goldscheider, N., and Zopfi, J.: Microbial communities in karst groundwater and their potential use for biomonitoring, *Hydrogeol. J.*, 17, 37–48, 2009.

Pu, J., Yuan, D., He, Q., Wang, Z., Hu, Z., and Gou, P.: High-resolution monitoring of nitrate variations in a typical subterranean karst stream, Chongqing, China, *Environ. Earth Sci.*, 64, 1985–1993, doi:10.1007/s12665-011-1019-7, 2011.

Rieger, L., Langergraber, G., Thomann, M., Fleischmann, N., and Siegrist, H.: Spectral in-situ analysis of NO₂, NO₃, COD, DOC and TSS in the effluent of a WWTP, *Water Sci. Technol.*, 50, 143–152, 2004.

Rieger, L., Langergraber, G., and Siegrist, H.: Uncertainties of spectral in situ measurements in wastewater using different calibration approaches, *Water Sci. Technol.*, 12, 187–197, 2006.

Rieger, L., Vanrolleghem, P. A., Langergraber, G., Kaelin, D., and Siegrist, H.: Long-term evaluation of a spectral sensor for nitrite and nitrate, *Water Sci. Technol.*, 10, 1563–1569, 2008.

Schiermeier, Q.: The parched planet: water on tap, *Nature*, 510, 326–328, doi:10.1038/510326a, 2014.

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Stark, C. H. and Richards, K. G.: The continuing challenge of nitrogen loss to the environment: environmental consequences and mitigation strategies, *Dyn. Soil Dyn. Plant*, 2, 41–55, 2008.

Stumwöhler, K., Matsch, N., Winkler, S., Fleischmann, N., Langergraber, G., and Habert, R.: Influence of changes of the wastewater composition on the applicability of UV-absorption measurements at combined sewer overflows, *Water Sci. Technol.*, 47, 73–78, 2003.

Thomas, O. and Burgess, C.: *UV-Visible Spectrophotometry of Water and Wastewater*, Elsevier, Amsterdam, the Netherlands, 2007.

Thomas, O., Gallot, S., and Mazas, N.: Ultraviolet multiwavelength absorptiometry (UVMA) for the examination of natural waters and wastewaters, *Fresen. J. Anal. Chem.*, 338, 238–240, 1990.

Vaillant, S., Pouet, M. F., and Thomas, O.: Basic handling of UV spectra for urban water quality monitoring, *Urban Water*, 4, 273–281, doi:10.1016/S1462-0758(02)00019-5, 2002.

van den Broeke, J., Brandt, A., Weingartner, A., and Hofstädter, F.: Monitoring of organic micro contaminants in drinking water using a submersible UV/vis spectrophotometer, in: *Security of Water Supply Systems: from Source to Tap*, Springer, the Netherlands, 19–29, 2006.

Wade, A. J., Palmer-Felgate, E. J., Halliday, S. J., Skeffington, R. A., Loewenthal, M., Jarvie, H. P., Bowes, M. J., Greenway, G. M., Haswell, S. J., Bell, I. M., Joly, E., Fallatah, A., Neal, C., Williams, R. J., Gozzard, E., and Newman, J. R.: Hydrochemical processes in lowland rivers: insights from in situ, high-resolution monitoring, *Hydrol. Earth Syst. Sci.*, 16, 4323–4342, doi:10.5194/hess-16-4323-2012, 2012.

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 1. Description of the double wavelength spectrophotometer (DWS) and the multiple wavelength spectrophotometer (MWS).

Components	DWS	MWS
Hardware	<ul style="list-style-type: none"> – Sensor incl. wiper for cleaning, cable, handling device (station terminal) – Internal memory included 	<ul style="list-style-type: none"> – Sensor, cable, handling device (station terminal) – Internal memory included
Hardware options	<ul style="list-style-type: none"> – Flow through-unit – GSM modem – Mobile display for on-site operations – Additional analogue outputs for up to 8 sensors 	<ul style="list-style-type: none"> – Cleaning device necessary in natural waters – GSM modem – Additional analogue outputs (terminal) – Interfaces for 1 MWS and 3 other sensors
Software options	<ul style="list-style-type: none"> – WINXP-based – Remote control – Alarm option – Display on-site: concentrations and daily or weekly trend line over time – Password for protection of display possible 	<ul style="list-style-type: none"> – WINXP-based – Remote control – Calibration menu for on-site calibration – Alarm option – Display on-site: switching between nitrate concentrations over time and spectra – Automated light source check
Output	<ul style="list-style-type: none"> – Absorption values at EM and ER – Calculated NO_x-N concentrations – Output via memory card and/or remote control 	<ul style="list-style-type: none"> – Absorption spectra – Calculated NO₃-N concentrations – Output via memory card and/or remote control
Maintenance	<ul style="list-style-type: none"> – Low – Manufacturers calibration of sensor needs to be refreshed after 1–2 years 	<ul style="list-style-type: none"> – Low – After 2 years check of light source at the manufacturer necessary (cost intensive ~ EUR 1000 excl. VAT)
Warranty	<ul style="list-style-type: none"> – 5 years on light source 	<ul style="list-style-type: none"> – 3 years
Costs	<ul style="list-style-type: none"> – Low maintenance and labour costs – Purchase price: ~ EUR 16 000 excl. VAT 	<ul style="list-style-type: none"> – Low maintenance and labour costs – Purchase price: ~ EUR 20 000 excl. VAT

Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

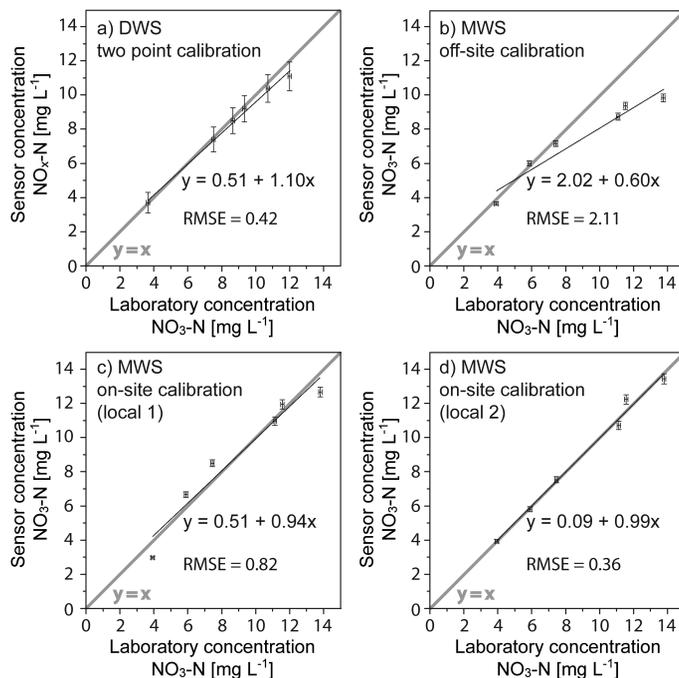


Figure 2. Accuracy of double wavelength spectrophotometer (DWS) and multiple wavelength spectrophotometer (MWS) immediately after calibration. To test the accuracy of the DWS, while considering the matrix composition of the studied water, spring water (highest concentration), water from a close-by river (lowest concentration) and a mix of river and spring water was used. For the MWS, spring water and water from other close springs were used. Error bars were calculated after the manufacturers specifications. Recorded sensor measurements are compared with measured concentrations analysed in the laboratory. The root mean square error (RMSE) was calculated by relating the measured sensor concentrations with the optimum calibration (ideal straight line $y = x$). The DWS has one option for calibration, whereas the MWS offers three options for calibration. All calibration options are in addition to the factory calibration provided by the manufacturer.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

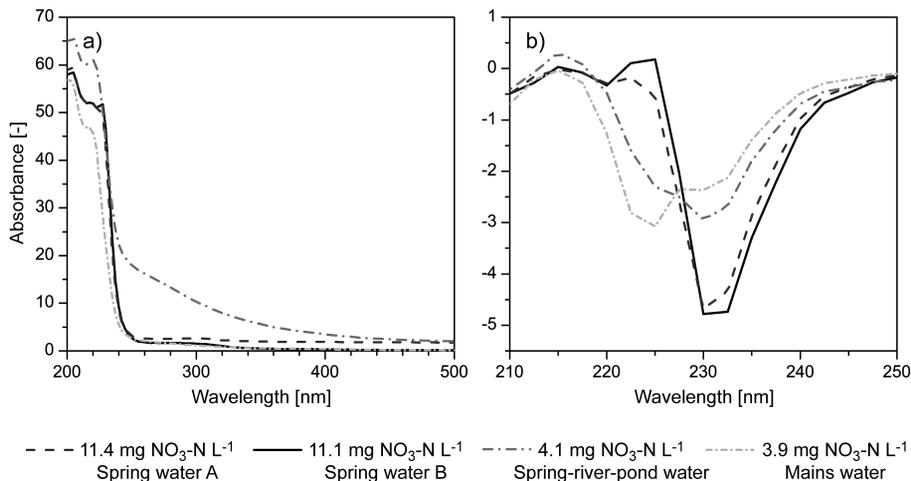


Figure 3. Absorbance vs. wavelength of 4 different samples measured with the multiple wavelength spectrophotometer (MWS). Spring water A was constantly monitored by the double wavelength spectrophotometer (DWS), whereas spring water B was monitored by MWS. **(a)** The isobestic points indicate different matrix compositions of the samples. Nitrate and nitrite are strongly absorbed below 250 nm. Other substances such as COD, trace organics, humic substances or turbidity in water can increase the absorbance value below 250 nm. The maximum influence of those substances can be recognised at higher wavelengths, for example at the obvious differences of the samples between 250 and 400 nm. **(b)** The first derivative of samples allows a finer interpretation of the nitrate content in the water. The samples with similar nitrate concentration show more similar curve progression than in **(a)**.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Technical note: Field experiences using UV/VIS sensors

M. Huebsch et al.

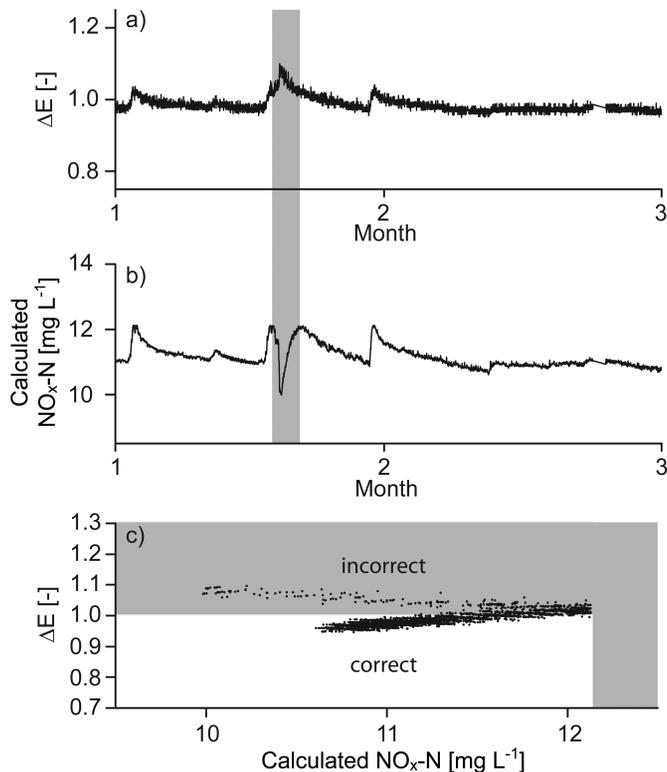


Figure 4. Example of discrepancies between wavelength and calculated $\text{NO}_x\text{-N}$ concentrations as displayed by the double wavelength spectrophotometer (DWS). The shaded grey area highlights the dataset of incorrect $\text{NO}_x\text{-N}$ calculated values. **(a)** Raw dataset of recorded wavelength values during 2 months. ΔE is the difference between light extinction at 218 and 228 nm. **(b)** Calculated $\text{NO}_x\text{-N}$ concentrations from the raw dataset as reported by the DWS. **(c)** Values of the raw dataset (ΔE) and the reported $\text{NO}_x\text{-N}$ concentrations of the DWS. Once $\text{NO}_x\text{-N}$ values reached 12.12 mg L^{-1} , values were incorrectly calculated in an opposite trend.

