



# Regional-scale brine migration along vertical pathways due to CO<sub>2</sub> injection – Part 1: The participatory modeling approach

Dirk Scheer<sup>1</sup>, Wilfried Konrad<sup>2</sup>, Holger Class<sup>3</sup>, Alexander Kissinger<sup>3</sup>, Stefan Knopf<sup>4</sup>, and Vera Noack<sup>4</sup>

<sup>1</sup>Institute for Technology Assessment and Systems Analysis (ITAS), Karlsruhe Institute of Technology, Karlstrasse 11, 76133 Karlsruhe, Germany

<sup>2</sup>DIALOGIK, Lerchenstraße 22, 70176 Stuttgart, Germany

<sup>3</sup>Department of Hydromechanics and Modelling of Hydrosystems, University Stuttgart, Pfaffenwaldring 61, 70569 Stuttgart, Germany

<sup>4</sup>Bundesanstalt für Geowissenschaften und Rohstoffe (BGR), Stilleweg 2, 30655 Hannover, Germany

*Correspondence to:* Dirk Scheer (dirk.scheer@kit.edu)

Received: 23 December 2016 – Discussion started: 16 January 2017

Revised: 13 April 2017 – Accepted: 26 April 2017 – Published: 9 June 2017

**Abstract.** Saltwater intrusion into potential drinking water aquifers due to the injection of CO<sub>2</sub> into deep saline aquifers is one of the potential hazards associated with the geological storage of CO<sub>2</sub>. Thus, in a site selection process, models for predicting the fate of the displaced brine are required, for example, for a risk assessment or the optimization of pressure management concepts. From the very beginning, this research on brine migration aimed at involving expert and stakeholder knowledge and assessment in simulating the impacts of injecting CO<sub>2</sub> into deep saline aquifers by means of a participatory modeling process. The involvement exercise made use of two approaches. First, guideline-based interviews were carried out, aiming at eliciting expert and stakeholder knowledge and assessments of geological structures and mechanisms affecting CO<sub>2</sub>-induced brine migration. Second, a stakeholder workshop including the World Café format yielded evaluations and judgments of the numerical modeling approach, scenario selection, and preliminary simulation results. The participatory modeling approach gained several results covering brine migration in general, the geological model sketch, scenario development, and the review of the preliminary simulation results. These results were included in revised versions of both the geological model and the numerical model, helping to improve the analysis of regional-scale brine migration along vertical pathways due to CO<sub>2</sub> injection.

## 1 Introduction

Any effort in investigating and developing the carbon dioxide capture and storage (CCS) technology unavoidably touches the social and political sphere and needs to take into account the broader societal debate. From the very beginning, this research on brine migration aimed at involving expert and stakeholder knowledge in simulating the impacts of injecting CO<sub>2</sub> into deep saline aquifers. Therefore, this work is split into two papers (Part 1 and Part 2), where Part 1 deals with the concept of participatory modeling (PM) as a means to involve external experts and stakeholders in the modeling process and Part 2 deals with the technical findings relevant for modeling brine migration. The study's main objective is to introduce participatory modeling in a joint natural and social science approach as a means of involving potential stakeholders of CO<sub>2</sub> storage applications in the technical modeling process.

Essentially, this study focuses on a comprehensive participatory stakeholder and modeling process, investigating scenario and model approaches for regional-scale brine migration in the groundwater system due to CO<sub>2</sub> injection. The basis of this study is a realistic (but not real) virtual site derived from a geological model with geological structures as can be found in the North German Basin. Following Knopf et al. (2010), the North German Basin is considered the most relevant region regarding CO<sub>2</sub> storage capacity in Germany. The adopted geological model comprises layers from the in-

jection horizon in a deep saline aquifer up to potential drinking water horizons in shallow freshwater aquifers. For the numerical simulations of brine migration, the model fully couples fluid flow in shallow freshwater aquifers with deep saline aquifers. Within this system, we investigated different scenarios that can lead to brine migration into shallow aquifers. Such a site-specific assessment of potential hazards would be necessary in an early phase of a multi-stage site identification process.

Public acceptance and a profound understanding of risks, hazards, and benefits are key issues on the way towards realizing such projects (Scheer et al., 2014). Therefore, it is good practice to involve stakeholders already at an early stage during the site identification process (Scheer et al., 2015). Applying the approach of participatory modeling, we incorporate from the very beginning of the modeling process stakeholder expertise and opinion making to reflect the geological model setup and subsequent relevant scenarios building for brine migration. Following this societal and technical approach, reference is made below to social scientists and modelers when presenting the participatory approach. With the term “modelers”, we synthesize the expertise of authors with a background in geology and numerical modeling.

The concept of PM provides a framework for integrating external expertise into producing and deploying computer-based models (Bots and Daalen, 2008; Dreyer et al., 2015; Dreyer and Renn, 2011; Röckmann et al., 2012). PM is a generic approach, open to different methods in order to facilitate early expert and stakeholder integration in science development. Integrating external expertise in geo-science development is currently still a rather exceptional case. We define PM as integrating experts and stakeholders into the production and/or usage phase of conceptual and computer-based models (Hare et al., 2003; Bots and van Daalen, 2008; Dreyer et al., 2015). Hence, PM opens up the modeling process for external actors who are not disposed of simulation and modeling expertise. In that sense, PM is a generic term for a large variety of experiments with expert involvement in science development. PM comprises several approaches, such as group model building focusing on strategy development in organizations (Richardson and Andersen, 1995), mediated modeling with its aim of generating consensus for environmental issues (van den Belt, 2004), or companion modeling for collective learning in the field of natural resource management (Simon and Etienne, 2010). Most research of PM application currently takes place in the management of natural resources, such as water, forestry, or land use (e.g., Refsgaard et al., 2005; Antunes et al., 2006; Cockerill et al., 2006; Bogner et al., 2011a; Webler et al., 2011; Röckmann et al., 2012). To our knowledge, no PM stimulated applications have so far been carried out in the field of CCS. Nevertheless, some research has been done on identifying how policymakers process and use carbon dioxide storage simulation data (Scheer, 2013, 2015). Applying PM research in general follows two objectives as highlighted in the litera-

ture (Dreyer and Renn, 2011). The first objective is to come to robust and – in the ideal case – consensual and jointly born recommendations for policy and management. This will be done via the integration of expert and stakeholder-related knowledge into the modeling process in order to improve the model quality. The second objective aims at stimulating collective learning processes within the involved stakeholder group. The general idea of PM fits well into our own research. However, with our approach, we build on experiences with other stakeholder elicitation processes in the field of CCS. For instance, in 2011 research was carried out (Wassermann et al., 2011) applying a combination of a traditional Delphi survey and a group Delphi method that focused on a broader range of topics such as technological challenges, administrative and legal aspects, chances and risks, societal relevance, and communication issues. The Delphi method is a widely used method to assess and calibrate expert judgments on topics for which only uncertain or incomplete knowledge is available (Hill and Fowles, 1975; Benarie, 1988). In addition, an expert elicitation study was undertaken to identify, assess, and rank potential CO<sub>2</sub> leakage scenarios at Heletz (Israel) to provide guidance to support the decision-making processes (Edlmann et al., 2016).

However, participatory modeling approaches can be seen as a specification of involvement exercises centering around simulation models (Scheer et al., 2015). The large majority of the “involvement literature”, instead, focuses on expert and/or lay people involvement in policy development, with a strong focus on integrating stakeholders and citizens. The main reason for involvement approaches is to improve the decision-making process and to represent the scope and variety of opinions, values, and preferences of different segments of society, thus improving both decision quality and legitimacy (NRC, 2008). A special focus in involvement practice has been on risk and technology assessment (e.g., Fischer, 1995, 2000; Stern and Fineberg, 1996; Petts et al., 2003). One reason for the “participatory turn” (Jasanoff, 2003) in risk and technology assessment is the fact that with emerging technologies issues of complexities, uncertainties, and ambiguities become more severe. Consequently, these new technologies tend toward harder values and softer facts (Burgess and Chilvers, 2006; Funtowicz and Ravetz, 1992; Stirling, 2003).

Conclusions drawn from this short literature review indicate a lack of both methods and case studies covering early expert involvement in science development. Research carried out at the science–policy interface often meets difficulties in understanding among stakeholders and decision-makers. As such, the transfer of scientific concepts to the practical application can benefit from an early-stage expert evaluation. To elaborate adequate methods and carry out a case study in the field of CCS has been the main motivation of the research presented in this paper.

The involvement exercise undertaken within the modeling of different brine migration scenarios made use of two ap-

proaches. As a starting point, guideline-based interviews carried out by the social scientists aimed at eliciting expert and stakeholder knowledge and assessment of geological structures and mechanisms affecting CO<sub>2</sub>-induced brine migration. The second involvement approach consisted of a stakeholder workshop including the World Café format and was carried out with the objective of evoking evaluations and judgments of the modeling approach, scenario selection, and preliminary simulation results.

The paper is organized as follows: Sect. 2 elaborates on materials and methods by briefly summarizing the participatory concept and outlining the detailed involvement steps and formats. Results of eliciting and feeding back expert information are provided in Sect. 3. The following Sect. 4 discusses the main results, while the last section ends with a conclusion.

## 2 Concept, methods, and materials

### 2.1 The concept: early participatory modeling stakeholder involvement

The modeling comprised both the setup of a static geological model and the implementation of dynamic numerical models used for investigating different brine migration scenarios as defined by the national Carbon Dioxide Storage Law (KSpG, 2012). The modeling concept provided the opportunity to involve stakeholders at a very early stage of science development. Thus, within this study we had the chance to include stakeholder opinion making and critique in the elaboration process of the geological model, the numerical model (i.e., the relevant physical processes), and the brine migration scenario design. As such, the focus of early stakeholder involvement in the modeling process was to

- critically assess and, if necessary, improve our proposed geological model,
- critically reflect on and thus contribute to brine migration scenario development, and
- critically review and discuss preliminary numerical simulation results.

The participatory modeling concept covered two involvement methods: several expert interviews and one expert workshop. Both approaches were assigned at decisive time spots within the science management process. Figure 1 details the combination of the science and participatory processes. The science development first started with elaborating the preliminary sketch of the geological model, which served as input for the interviews. The interviewees critically assessed the sketch and provided expert insights into brine migration mechanisms and scenarios. The expert knowledge supported finalization of the geological model and the scenarios elaborated by the modelers, which were fed into the

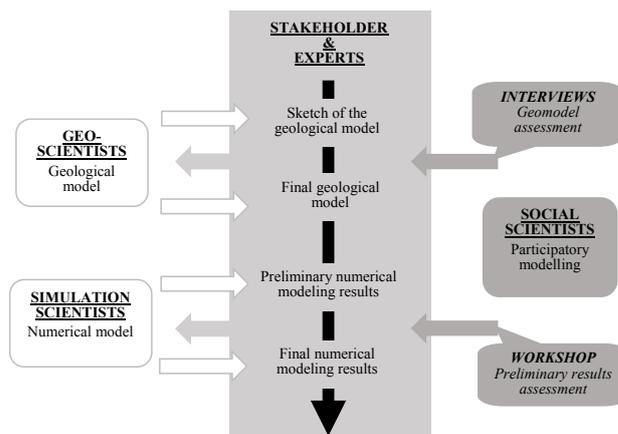


Figure 1. Detailing the science and participatory process concept.

numerical modeling. The preliminary numerical modeling results were then critically discussed by stakeholders within the expert workshop. Subsequently, modeling results were finalized (Kissinger et al., 2017).

### 2.2 The methods: expert interview and expert workshop

Expert interviews are a permanent feature in the toolbox used in empirical social research (Mayring, 1990; Bogner et al., 2011b). Ten interviews were conducted between May and June 2013 by the social scientists with interviewees representing public authorities (five interviews), business and industry (two interviews), the science community (two interviews), and non-governmental organization representatives (one interview). The interviewees were provided with an interview guideline outlined in Table 1 covering the topics (i) hazard assessment CO<sub>2</sub> injection (most important risks and hazards), (ii) brine migration mechanisms (pathways, physical processes, target variables), (iii) scenarios for brine migration (prioritization of brine migration pathways), and (iv) geological model review and recommendations. The questionnaire has been elaborated in close co-operation between the modelers and the social scientists in order to elicit the broad range of interviewee expertise in these fields. The main focus lay on enriching the geo-model through feedback loops with interviewee knowledge contributions.

The interviews were conducted face-to-face and lasted on average 60 min. Key issues addressed by the questionnaire referred to parameters and processes influencing brine migration, and the specification and prioritization of brine migration scenarios. The social scientists provided interviewees with some detailed questions jointly compiled with the modelers along with the previously introduced model sketch shown in Fig. 2 in order to get the stakeholders' critical feedback on their understanding of brine-related hazards, mecha-

**Table 1.** Interview guideline (questionnaire) handed out before carrying out the interviews.

Topic: “Interviewee’s work environment and expertise”
Short overview of the interviewee on her/his organization, professional work responsibilities and topics, and personal expertise
Topic: “Risk assessment and scenarios of brine migration”
– Which risks do you associate with brine migration due to CO <sub>2</sub> injection? – Which mechanisms and migration pathways for brine migration do you think are possible/thinkable and how would you describe them? – Which physical processes should be considered within a numerical model simulating brine migration? – Which target variables are essential in order to operationalize brine migration, that is, which indicators are useful for measuring, quantifying, recording, and describing the impacts of brine migration?
Topic: “Prioritization of mechanisms and scenarios”
Classify scenarios according to the ranking list with regard to risk potential, covering probability and extent of damage. Provide reasoning and arguments for the ranking list.
Topic: “Specification of brine migration scenarios”
By means of a 3-D-model print-out (cf. Fig. 2), interviewees are requested to identify and specify scenarios within the model sketch.
Topic: “Summary”
Main conclusions to be drawn by interviewees Overview of the next project steps by the interviewer

nisms, and the plausibility of the principal geological model setup.


The expert workshop took place in Hannover in September 2014 and gathered a total of 17 external participants plus six project staff members. External participants represented public authorities (eight participants), business and industry (two participants), the science community (four participants), and non-governmental organization experts (three participants). Within the first session, modelers presented both the geological model as well as preliminary simulation results. During the second part of the workshop, a World Café deliberation was carried out. The “World Café” is a structured conversational process, which aims to facilitate open and intimate discussion. The idea behind it is to provide access to the collective intelligence or collective wisdom among participants. Participants move between a series of tables where they continue the discussion in response to a set of questions, which are predetermined and focused on the specific goals of each World Café (Brown and Issacs, 2005; Steier et al., 2015). For that purpose, the participants in our workshop were divided into several small groups seated around tables discussing predefined core questions. After 20 min, we recombined the groups in a way that each member of a group moved to a different table. Only one person, the host, remained at the table and informed the new group about what had happened in the previous discussions. This procedure was repeated three times.

Recruitment of experts for both the interviews and the workshop followed several selection rules: expertise in dealing with the topic of geoscience, (and/or) carbon dioxide capture and storage, (and/or) modeling; representing (either/or) the area of public authorities, business and industry, science community, and civil society; and having longstanding experience and/or holding a senior professional position. Recruitment criteria thus focussed on gathering expertise and assessment from the narrower field of geo-science, computational science, and the CCS technology. The selection approach thus aimed at in-depth knowledge from experts in order to improve our modeling exercise.

Both semi-standardized interviews and expert workshops belong to the field of explorative and qualitative research. An explorative design is reasonable when an object is underresearched and only basic knowledge on causes and effects is available. The same argument counts for using a qualitative approach since hypothesis-testing methods require systematic knowledge in order to sharpen a set of clear-cut hypotheses. Both arguments are valid in the case of brine migration due to CO<sub>2</sub> injection.

### 2.3 Material for stakeholders: the geological model (sketch) and preliminary simulation results

Data derived from 3-D geological models were used by the modelers for the construction of a sketch for the guideline-based interviews (Fig. 2). The sketch already includes technical and geological features which may provide pathways for

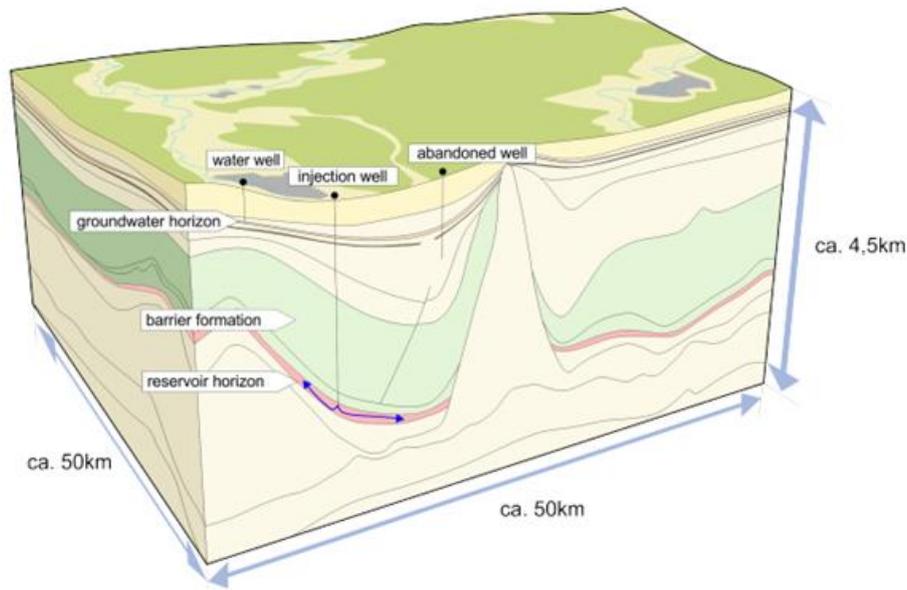

**Figure 2.** Sketch of the geological model used for the interviews (graphical realization: Jens Rätz).

brine, such as abandoned wells, fault zones, and hydrogeological windows in the Rupelian clay barrier. Based on feedback from the guideline-based interviews and their own considerations, several migration pathways were included in the geological model, like hydrogeological windows and a fault zone at the flank of a salt diapir/salt wall. This fault zone continues along the whole flank of the salt diapir. Based on the geological model, numerical simulations were carried out as a basis for the discussion at the workshop. For the first simulations, a permeable fault zone was included in the model. The modelers tested the sensitivity of different geophysical parameters to fluid migration and injected water instead of  $\text{CO}_2$ . The transport of salt was not included at that stage.

The geological model presented at the stakeholder workshop did not consider a real site, but was based on a real structural configuration derived from the German North Sea. The model comprised layers from the deep saline injection horizon up to shallow freshwater aquifers. The region belongs to the North German Basin and was affected by salt mobilization in different times. This mobilization also affected the geometry of the overburden. The result is an elongated anticlinal structure, which is meant to act as a structural trap for the injected  $\text{CO}_2$ . One of the key features of the geological model is a rising salt wall, which pierces through all layers up to the shallow freshwater aquifers. The geological model includes two important barrier layers: the Upper Buntsandstein barrier and the Rupelian clay barrier. The Upper Buntsandstein barrier is the first barrier above the injection horizon and prevents the injected  $\text{CO}_2$  from migrating out of the injection horizon. The Rupelian clay barrier separates shallow freshwater aquifers from deep saline aquifers. We modified this hydraulic barrier to be penetrated by the uplifted Cretaceous

sediments on top of the anticlinal structure (so-called hydrogeological windows). Making a conservative assumption, we assumed a permeable vertical pathway along the whole flank of the salt wall, which we refer to as the fault zone. This fault zone is a permeable connection between the injection horizon and the shallow aquifers above the Rupelian clay barrier. The main reason for assuming this permeable fault zone on the salt wall was a statement by LBEG (2012): “the contact zone between salt domes and the  $\text{CO}_2$ -sequestration horizon is assumed to be a zone of weakness, similar to geological faults”.

Based on the geological model, numerical simulations were carried out for different scenarios where the lateral boundary conditions (no-flow boundary, constant-pressure boundary), the Upper Buntsandstein barrier permeability, and the fault zone permeability were varied. The numerical model at that stage did not consider the transport of salt and its effect on the density and the viscosity of brine. Further, simplified models were presented and different model simplifications were compared, such as injecting brine instead of  $\text{CO}_2$  and using an analytical model to calculate leakage through the fault zone. The target variables considered were the evolution of leakage rates over the fault zone and the hydrogeological windows during the injection, as well as the spatial distribution of flow rates per unit area after 50 years of injection at the bottom of the shallow aquifers. The main conclusions drawn from these preliminary results were that the boundary conditions and the Upper Buntsandstein barrier permeability have a strong influence on the amount and the location of injection-induced leakage.

### 3 Results

The participatory modeling approach yielded several results covering brine migration in general, the geological model sketch, scenario development, and the review of the preliminary simulation results. In the following, we will show the main results from the interviews and the workshop.

#### 3.1 Brine migration: general issues

The interviews revealed several decisive issues in tackling brine migration in general. A first result from the interviews relates to the conceptualization of “damage” in case brine meets drinking water. Some stakeholders favored what we call an “absolute” understanding, talking of damage as soon as any salt water intrudes drinking water aquifers no matter the volume. This group of stakeholders holds the opinion that any intrusion of brine must be considered a damage, which implies an understanding of zero-risk tolerance. Others hold the opinion that the salinization of groundwater needs to be considered in “relative” terms. For the latter experts, damage is not a question of whether or not brine comes into contact with groundwater, but is rather defined as an event where specific threshold values are exceeded – thus brine volumes matter. In order to allow judgments on risks, a detailed assessment of the brine quantity, its salinity, and probabilities of occurrence need to be performed. This issue remained largely unsolved during the interviews and hints at differing concepts, perceptions, or interests that may frame the interviewees’ risk-related thinking.

Concerning potential brine migration paths, the interviewed stakeholders unanimously made a clear-cut distinction between man-made and geology-induced hazards. The former comprises facilities such as old and new boreholes or drinking-water wells, while geology-induced hazards refer to cracks and faults, salt diapirism/doming, thin and non-continuous seals, or a non-continuous Rupelian clay barrier. The distinction between potential migration paths caused by technical installations or geological structures was accompanied by a distinct hazard prioritization. All participants agreed in estimating geology-based hazards as far more relevant compared to man-made hazards. In general, interviewees argued that man-made hazards, such as a faulty drill hole, are much easier to cope with technologically and allow only relatively small quantities of brine to migrate. The main argument for estimating man-made hazards as less relevant is due to the perception that only very small brine volumes are able to migrate through leaky wells.

As the main hazards of CO<sub>2</sub> injection with regard to brine displacement, interviewees stated consistently that vertical brine migration, salinization of groundwater, increase in pressure, and uplifting typify the most relevant hazards. However, in line with the differing understanding of risks and damages in general, interviewees stated a diverse set of reference points. One statement argued, for instance, that vertical


brine migration is not a hazard per se but related only to specific sites. Another statement linked brine migration issues more to the social world, arguing that it is a juridical, contamination, and data collection problem. Other statements referred to issues such as which value should be protected and mentioned several subjects of protection such as the wildlife, people, and water (drinking water, healing water, mineral water).

Regarding target variables, the interviews brought together a great variety of target variables to be considered. First, interviewees stated that there is in general a need to determine what exactly an extent of damage is and to agree on relevant target variables. However, the relevant target variables varied among interviewees. In sum, interviewees mentioned variables such as salt concentration, several types of ions, water quality indicators, chlorine content, total dissolved solids (TDS) as an aggregate indicator, electrical conductivity as a sum parameter, and pressure variance.

#### 3.2 Geological model issues

Interviewees were provided with a sketch of the intended geological model as elaborated by the modelers (Fig. 2). The geological model sketch intended to initiate and stimulate discussions and reflections concerning model specifications thereafter implemented by the modelers. Interviewees, in addition, had the chance to draft some explanations and further illustrations on the paper sheet. Figure 3 shows an example of a model sketch commented on by an expert.

The geological model sketch and the interview guideline stimulated several issues to be summarized as follows: first, on a generic level interviewees noted that the model sketch is far too simple, underestimating real-world complexity – though experts conceded that a model sketch at the corresponding research stage needs to be simple. Second, issues of model boundaries were raised. In geological modeling, specifications of model boundaries are very sensitive towards modeling results. Thus, a critical reflection on the type and determination of model boundaries is essential. The sketch by itself was not specified with the type of model boundaries, leaving it open as to whether the aquifers are closed or open. Third, the issue of old boreholes was discussed. As shown in the sketch, it contained just one abandoned well; it remains an open question whether this is enough, as stated by an interviewee. In addition, the indicated water well in close proximity to the non-continuous Rupelian clay barrier was seen critically. Fourth, several geological issues were raised. Interviewees mentioned that the Rupelian clay barrier might serve as a migration path, depending on the level of pressure. The salt diapir in the sketch remained unclear concerning its 3-D shape (wall, tapered, cylindrical, mushroom-like). Depending on the considered shape of the diapir, CO<sub>2</sub> is able or not to spread and flow. Fifth, fault zones shown in the sketch were estimated far too little and in the wrong places, and fractures and the geometry of fault damage zones were not spec-

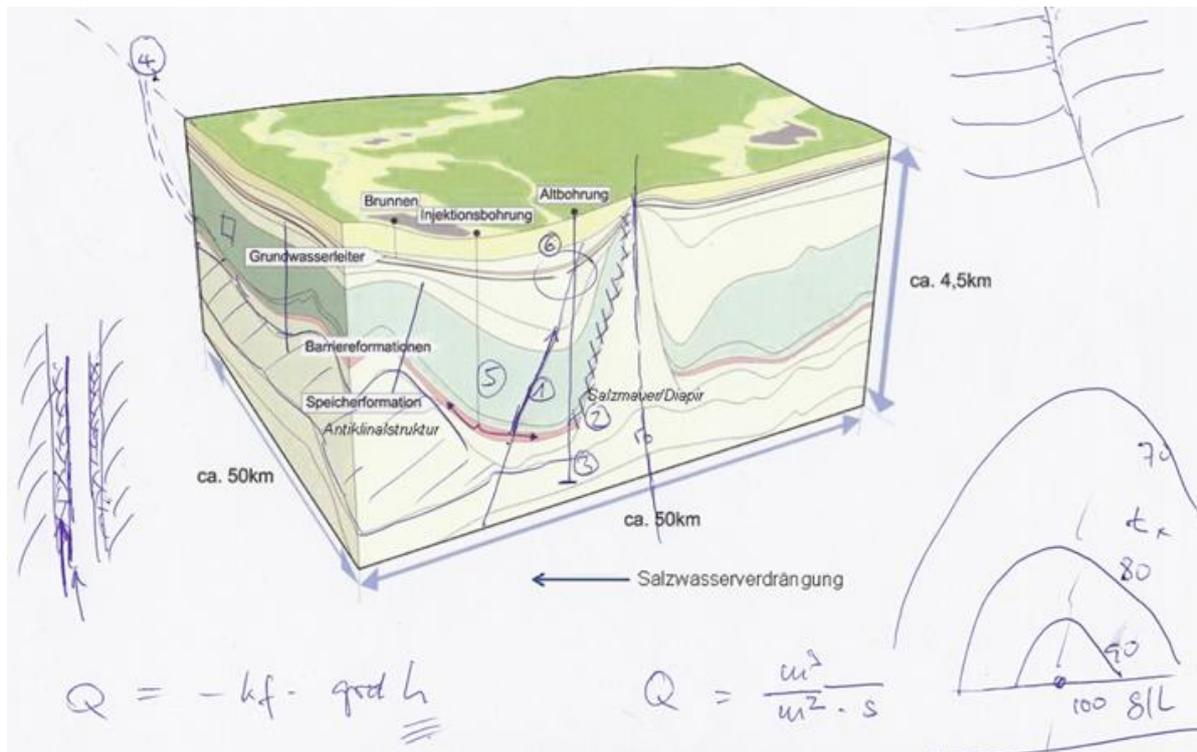

**Figure 3.** Example of the commented geological model; sketch by the interviewee.

ified. Concerning barriers, statements mentioned that there is a need for two barrier formations according to the German CCS law (KSpG, 2012). Finally, interviewees recommended displacing the injection point; better locations, for instance, foresee injection below the Zechstein salt (which is the bottom layer of the sketch) or injection directly into the inflection point of the anticlinal structure – as opposed to injection at the flank of the anticlinal structure, as suggested by the sketch.

### 3.3 Scenario issues

Numerical simulation of brine migration along vertical pathways was intended to conceptually run and compare different scenario settings varying with parameter values and/or initial boundary conditions. Interviews served to discuss and provide relevant issues for scenario design and development. As a result, interviews elicited a broad range of key elements for scenario building. Table 2 depicts these elements together with stakeholders' suggestions on how to integrate them into brine migration scenario modeling. Social scientists fed back several stakeholder suggestions on the geological model, scenario design and alignment, and relevant geo-physical and geo-mechanical processes to the modelers. Modelers relied on these expert suggestions and developed four different scenarios (plus a reference scenario) for running brine migration

calculations. For details and results on the scenarios, see Part 2 of the study (Kissinger et al., 2017).

### 3.4 Numerical simulation issues

Within the workshop, the principal conceptual design and first simulation results were presented to participants by the project team. Subsequently, we used a World Café format to discuss interactively issues of the simulation concept. The World Café group discussions centered on two sets of questions covering the spatial dimension of the model, migration pathways at the flank of the salt diapir, and the conceptual approach of using a realistic but not site-specific geological model. An open discussion finally focused on first simulation results. The set of questions arose by close co-operation between modelers and social scientists aiming at the evaluation of two main assumptions of our modeling exercise: the spatial dimension and the realistic but not site-specific geo-model. In the following, we will present key findings of the stakeholder feedback from the workshop.

*First set of questions: “Basic assumptions of the geological model are the spatial dimension of 58 × 39 km and a permeable fault zone along the salt wall. How do you evaluate these assumptions? Is the spatial dimension sufficient to investigate pressure effects in the far-field of the CO<sub>2</sub> injection? Is brine migrating along a salt wall up to the top of the salt diapir realistic?”*

**Table 2.** Key elements for scenario building from the interviews.

Element	Stakeholder suggestions
Boundary conditions	Consider different boundary conditions since this has considerable impact on brine displacement and pressure increase mechanisms
Geological structure	Use different geological structures since brine displacement and pressure increase are highly dependent on the geological structure
Space dimensions	Investigate scenarios with different spatial dimensions (e.g., a large-scale scenario with 100 km)
Man-made migration paths	Integrate drill holes in order to validate expected impacts such as low displacement quantities and minor increases in pressure
Variable layer permeabilities	Vary permeabilities of important layers
Injection points and volumes	Consider different injection points and volumes
Pressure management	Simulate different volumes of brine production
Grid discretization	Work with detailed discretization of geological weak points vs. rough discretization of huge spatial structures

Stakeholder comments differed, depending on whether one or multiple injection points were considered. In the case of injecting CO<sub>2</sub> at various sites, participants unanimously agreed that due to pressure interference a wider space must be investigated. Contrasting opinions were raised for modeling just a single injection point. One group held the opinion that the assumed space size of 58 × 39 km is sufficient. They argued that the brine primarily follows vertical migration pathways. Other participants challenged this argument by referring to studies that demonstrate a rise in pressure even at distances of 100 and more kilometres. According to this judgment, researchers should use models with spatial parameters of adequate scale in order to create reliable scenario findings. The discussion on brine migration pathways at the flanks of salt diapirs brought out contrary results, with both opinions affirming and denying pathway probabilities. For some stakeholders the existence of permeable pathways along flanks of salt diapirs seems probable. Others were convinced that this is not a realistic assumption and thus found it implausible to model leakage at the salt diapir. If permeable pathways along the salt wall exist, salt does not dissolve at the wall since water in contact with the diapir is already saturated. The different views on brine migration at salt diapirs finally led to the recommendation to simulate comparative scenarios with high and low permeability parameters for the fault zone along the salt wall.

*Second set of questions: “We consider a realistic, but not site-specific model. Is this, in your opinion, an appropriate approach for gaining general insights into brine migration with scenario modeling?”*

The majority of the stakeholders endorsed the modeling approach by confirming that generic findings can be drawn from a realistic but not site-specific model. Key aspects in terms of processes, methods, and structures are covered, serving the model to be used for improving the understanding of fundamental issues even before exploration drilling takes place. Of course, stakeholders were aware that working with a realistic model does not replace a site-specific analysis. However, this insight was the starting point for a minority of participants, stressing that only geological on-site investigation would be able to deliver reliable findings.

Final workshop discussion: the final session of the workshop presented group work results and openly discussed the findings in full plenum. Here, stakeholders made the following additional comments on the preliminary simulation results.

- The injection of brine into a brine-filled storage horizon instead of CO<sub>2</sub> was considered a valid assumption.
- The assessment of dynamic effects in the groundwater system during the injection of CO<sub>2</sub> is a valuable contribution for understanding pressure conditions and fluid migration processes in complex geological systems.
- The stakeholders found it useful to identify the zones where the highest local flow rates occur, if the effect of fluid and rock compressibility on the storage capacity of the system is exhausted.
- The simulations should include the variable-density flow of brine.

- Groundwater recharge as a boundary condition for the shallow aquifers should be considered.
- Overlapping pressures from multiple injection sites should be considered.

### 3.5 Feedback to and revisions of modelers

Social scientists gathered elicited expert knowledge and expertise and fed back recommendations to the modelers. Modelers then were required to review each statement and balance whether or not to revise their research. Modelers categorized the stakeholder input according to four major categories. (A) Stakeholder issues which were already considered within the preliminary simulation results. (B) Newly implemented issues after the stakeholder workshop which were already planned. (C) Stakeholder issues that were initially not covered, but that due to the participatory process are now seen as relevant by the modelers. (D) Stakeholder issues that were not realized, either because they were beyond the scope of the project or deemed less relevant. Table 3 provides an overview of stakeholder input and issues as they were implemented or not in the research.

## 4 Discussion

This study comprised a joint natural- and social-science research approach with the aim of involving stakeholders in the scenario development and modeling process at an early stage. The innovative design brought new insights both in the field of natural science-based CCS research related to the hazard of brine migration, and social science-based inter- and trans-disciplinary research areas. Hence, results from both fields are strongly connected.

First, we will briefly summarize the main findings from the geological and numerical modeling exercise in order to allow readers a joint perspective. The results are based on the revised geological and numerical model that was designed within the PM process. A more extensive discussion of these results is provided in Kissinger et al. (2017). The main findings can be summarized as follows: notable, in the sense that non-negligible increases in salt concentration in the target aquifers are locally constrained to regions where initially elevated concentrations are present prior to the injection and where permeabilities are high enough to support sufficient flow. Hence, the quality of the prediction of concentration changes strongly depends on how well the initial salt distribution is known. An inherent problem in modeling is the assignment of boundary conditions. Lateral and top boundary conditions strongly determine the amount of brine displaced into the target aquifers. Lateral Dirichlet boundary conditions at an insufficient distance from the injection will lead to a strong underestimation of vertical flow. Setting the top boundary condition as open – as opposed to a closed boundary at the top – strongly increases the amount of fluid that is

displaced into the target aquifers. The Upper Buntsandstein barrier permeability plays a crucial role in determining the amount of diffuse leakage. Diffuse migration over the Upper Buntsandstein barrier can result in focused leakage in locations where the Rupelian clay barrier is discontinuous. Injecting an equivalent volume of brine instead of CO<sub>2</sub> is a conservative assumption, which leads to slightly increased brine flow into the shallow aquifers and a reduced pressure buildup in the injection horizon.

Second, we more extensively discuss the main findings from the participatory approach as presented within this paper. The most important tool within this research has been to run simulations in order to analyze brine migration scenarios – the process integrated from the very beginning of stakeholder involvement. The joint approach intended to gain new insights into geological matters, and – from a methodological perspective – gain insights into potentials and constraints of participatory modeling in the field of geo-science, and for participatory approaches in general.

At the time when this research was started (2012), the public debate on the geological storage of CO<sub>2</sub> was already in decline, as it was clear that there would be no large-scale CO<sub>2</sub> sequestration projects in Germany in the near future due to fierce public opposition and an inadequate regulatory framework. This also reduced the motivation of stakeholders to get involved in the PM process. Despite these adverse conditions, our research was able to attract the attention of a more general audience through a newspaper article published in one of Germany's major newspapers (Schrader, 2014). However, what becomes clear from this is the fact that when a topic is highly politicized in politics and society, participatory modeling has difficulties in recruiting stakeholders and experts. In our case, for instance, stakeholders and experts from the field of drinking water were not willing to participate. The decision to conduct research on brine migration for a virtual site instead of a specific site also influenced the recruitment of the expert panel. The group of participants comprised experts from the field of CCS and geo-science modeling representing the science community, regulators and public authorities, business and industry associations, and non-governmental organizations. Actors and stakeholders from a local level such as the affected public, members of municipal and local counties or representatives from local environmental groups or citizen initiatives were not considered part of the participatory modeling process. The decision in favor of this type of participant recruitment strategy was due to the research objective of providing solid scientific methods backed by external expert knowledge, and to minimize the politicized bias within the deliberation process. The composition of participants at the expert workshop helped to create a “productive atmosphere”, at least in the opinion of the authors. The discussion focused on the geo- and simulation methodology and the results presented at the workshop – without drifting off into other CCS-related topics that were beyond the scope of this research. In this way, the modelers were able

**Table 3.** Overview of implementation and revision of stakeholder input.

Stakeholder input	Revision*	Rationale
Brine migration: general issues		
absolute vs. relative damage	A	Zero impact is deemed impossible by modelers; results should be interpreted relative to salinization prior to injection.
man-made vs. geology hazards	D	Man-made hazards were considered much less important than geological hazards by the stakeholders.
Geological model issues		
model simplicity	A	Modelers decided that pathways representative of the NGB (fault zone at the salt wall flank and hydrogeological windows in the Rupelian clay barrier) should be considered. They also decided against including more pathways (e.g., leaky wells, more fault zones), as this would make the showcase too complicated for PM.
model boundaries	C	domain extension (100 km) resulting in infinite aquifer-like conditions
Rupelian clay barrier	A	considered as the second important barrier layer with discontinuities at hydrogeological windows
fault zones and fractures	A	The permeable fault zone directly connecting the injection horizon with shallow aquifers is considered.
injection point	D	The variable position of the injection within the anticlinal structure was not considered because it is deemed to be of minor relevance for large-scale brine migration by the modelers.
Scenario issues		
boundary conditions	A & C	scenario with variation of lateral boundary conditions (infinite aquifer, no flow, and constant pressure)
space dimensions	A & C	the lateral extension of the model domain up to 100 km to obtain more realistic lateral boundary conditions (infinite aquifer)
variable layer permeabilities	A	scenario where the permeability of the important Upper Buntsandstein barrier is varied
injection points and volumes	D	Variable injection volumes/rates were not considered as brine migration rates; they could be inter- or extra-polated (superposition) from the results.
pressure management	D	beyond the scope of the study
grid discretization	D	No refinement near geological weak points to maintain computational feasibility; comparison to analytical solutions with similar discretizations for simplified geological models yielded acceptable agreement.
Numerical simulation issues		
spatial dimension	C	lateral extension of the model domain up to 100 km to obtain more realistic lateral boundary conditions (infinite aquifer)
permeable salt wall flank (fault zone)	C	Variable parametrization (permeability) of the fault zone along the salt wall; investigation of sensitivity of leakage depending on fault zone permeability is performed.
brine injection	A	Brine is injected at a volume-equivalent rate to the CO <sub>2</sub> injection rate.
pressure evolution	A	consideration of compressibility of solid and fluid phases, infinite aquifer boundary conditions
identification of areas prone to salinization	A+B	spatial distribution of flow rates per unit area and salt concentration increases
variable-density flow	B	Density and viscosity are a function of the salt concentration.
groundwater recharge	C	groundwater recharge for the top aquifers to establish more realistic flow conditions in the shallow formations
multiple injection sites with overlapping pressure	D	Beyond our scope; would require a basin-scale model of the North German Basin which is not available yet.

\* Explanation:

A: Already considered during presentation of preliminary results at stakeholder workshop

B: Newly implemented after stakeholder workshop since already planned

C: Newly implemented after stakeholder workshop although initially not planned

D: Not implemented because out of scope or deemed less relevant by stakeholders or modelers

to profit from the discussion through helpful suggestions and critical remarks. If a more general public had been involved in the PM process, the effort for the modelers in preparing the presentation of the methodology and the results would have been significantly higher and the benefit in terms of helpful suggestions would have been much smaller.

An important question in participatory modeling is whether to involve external experts or not in the model construction process. In most cases, model construction involvement is very much constrained, since the model is already pre-existent. In our case, we had the chance to integrate experts already in the geological model construction phase. However, to be more precise, the impact of participants on model construction was limited to commenting on and giving recommendations towards a given basic geological model. First, modelers decided to use a virtual model characteristic of the North German Basin, which was fed with geological data from 3-D models of a region in the southwestern German North Sea. The main reasons for not involving participants in the decision have been 2-fold: first, the North German Basin is the most important area for potential CO<sub>2</sub> storage and hence is in line with the state of the art in CCS research. Second, the rights to use specific geological data were held by a research partner, and so the model could be easily used for carrying out the analysis. On the other hand, the geological model construction had to be further modified and specified based on the given geological dataset in order to run the intended simulations on CO<sub>2</sub> injection and brine migration. That is the interface where the participatory modeling exercise came into play. Stakeholders contributed with their expertise towards improving the proposed geological model, the brine migration scenarios, and the final numerical results. On their end, stakeholders had a notable impact on the final geological model and the design of brine migration scenarios. In other words, experts influenced with detailed knowledge the fine-tuning of the geological and numerical modeling, while the fundamental modeling design and approach remained out of scope.

## 5 Conclusions

Involving external experts and stakeholders in evaluating and reflecting on brine migration by means of participatory modeling techniques has proven to be a helpful and successful approach. It led to valuable recommendations for the modelers' research and enabled knowledge transfer to both involved stakeholders and responsible researchers. The groundwork for this positive outcome is the interaction between those three actor groups crucial for the performance of PM processes, i.e., modelers, stakeholders, and social scientists. Openness for stakeholder inputs and the general willingness to adapt models, concepts, or findings in response to stakeholder evaluations are key requirements for modelers in PM processes. This cannot be taken for granted, since the model-

ers have detailed insights into the problem setting. Hence, in order to be accepted by the modelers, the participating stakeholders must consist of experts, decision-makers, or affected people well known for their expertise in the respective field. Although stakeholders are required to be experts themselves, they need to agree with the predefined framework conditions constraining their influence. The framework conditions need to be disclosed transparently by PM responsible persons beforehand. The role of the social scientists, thus, is 2-fold. First, they must have comprehensive knowledge about social science methodologies, they need to select the appropriate tools for the specific PM case, and they must be experts in applying these methods. Second, the social scientists facilitate the interaction between modelers and stakeholders in terms of both translating research questions into a form suitable for stakeholder discussions and feeding back stakeholder comments and assessments to the modelers. Maintaining strict neutrality and concentrating on method and communication expertise are at the heart of the social scientists' facilitator role.

*Data availability.* Upon email request to the authors, the transcripts of the interviews and the World Café (both in German) are available.

*Competing interests.* The authors declare that they have no conflict of interest.

*Acknowledgements.* The authors gratefully acknowledge the funding for the CO2Brim project (03G0802A) provided by the German Federal Ministry of Education and Research (BMBF) and the German Research Foundation (DFG) within the GEOTECHNOLOGIEN geoscientific research and development program. We are very grateful for the valuable comments of our reviewers and editors. Finally, yet importantly, we thank all experts and stakeholders for their willingness to contribute to the study.

Edited by: A. Guadagnini

Reviewed by: two anonymous referees

## References

- Antunes, P., Santos, R., and Videira, N.: Participatory decision making for sustainable development – the use of mediated modelling techniques, *Land Use Policy*, 23, 44–52, 2006.
- Benarie, M.: Delphi and Delphi like approaches with special regard to environmental standard setting, *Technol. Forecast. Soc. Change*, S149–S158, 1988.
- Bogner, A., Gaube, V., and Smetschka, B.: Partizipative Modellierung. Beteiligungsexperimente in der sozialökologischen Forschung, *Österreichische Zeitschrift für Soziologie*, 36, 74–97, 2011a.
- Bogner, A., Littig, B., and Menz, W.: *Interviewing experts*, Palgrave MacMillan, New York, 2011b.

- Bots, P. W. G. and van Daalen, C. E.: Participatory model construction and model use in natural resource management: a framework for reflection, *Syst. Pract. Act. Res.*, 21, 389–407, 2008.
- Brown, J. and Issacs, D.: *World Café: Shaping Our Futures Through Conversations That Matter*, San Francisco: Berrett-Koehler, 2005.
- Burgess, J. and Chilvers, J. D.: Upping the ante: a conceptual framework for designing and evaluating participatory technology assessments, *Sci. Public Policy*, 33, 713–728, 2006.
- Cockerill, K., Passell, H., and Tidwell, V.: Cooperative modeling: building bridges between science and the public, *J. Am. Water Res. Assoc.*, 42, 457–471, 2006.
- Dreyer, M. and Renn, O.: Participatory approaches to modelling for improved learning and decision-making in natural resource governance: an editorial, *Environ. Policy Gov.*, 21, 379–385, 2011.
- Dreyer, M., Konrad, W., and Scheer, D.: Partizipative Modellierung, in: *Methoden der Experten-und Stakeholdereinbindung in der sozialwissenschaftlichen Forschung*, edited by: Niederberger, M. and Wassermann, S., Springer VS, Wiesbaden, 265–289, 2015.
- Edlmann, K., Bensabat, J., Niemi, A., Haszeldine, R. S., and McDermott, C. I.: Lessons learned from using expert elicitation to identify, assess and rank the potential leakage scenarios at the Heletz pilot CO<sub>2</sub> injection site, *International Journal of Greenhouse Gas Control*, 49, 473–487, 2016.
- Fischer, F.: Hazardous waste policy, community movements and the politics of NIMBY: participatory risk assessment in the USA and Canada, in: *Greening Environmental Policy*, edited by: Fischer, F. and Black, M., London, Paul Chapman, 165–182, 1995.
- Fischer, F.: *Citizens, Experts and the Environment*, Duke University Press, Durham NC, 2000.
- Funtowicz, S. O. and Ravetz, J. R.: Three types of risk assessment and the emergence of post-normal science, in: *Social Theories of Risk*, edited by: Krimsky, S. and Golding, D., Greenwood Press, New York, 251–273, 1992.
- Hare, M., Letcher, R. A., and Jakeman, A. J.: Participatory modelling in natural resource management: a comparison of four case studies, *Integr. Assess.*, 4, 62–72, 2003.
- Hill, K. Q. and Fowles, J.: The methodological worth of the Delphi forecasting technique, *Technol. Forecas. Soc. Change*, 7, 179–192, 1975.
- Jasanoff, S.: Technologies of humility: citizens participation in governing science, *Minerva*, 41, 223–244, 2003.
- Kissinger, A., Noack, V., Knopf, S., Konrad, W., Scheer, D., and Class, H.: Regional-scale brine migration along vertical pathways due to CO<sub>2</sub> injection – Part 2: A simulated case study in the North German Basin, *Hydrol. Earth Syst. Sci.*, 21, 2751–2775, <https://doi.org/10.5194/hess-21-2751-2017>, 2017.
- Knopf, S., May, F., Müller, C., and Gerling, P.: Neuberechnung möglicher Kapazitäten zur CO<sub>2</sub> – Speicherung in tiefen Aquifer-Strukturen, *Energiewirtschaftliche Tagesfragen*, 60, 76–80, 2010.
- KSPG: Kohlendioxid-Speicherungsgesetz as of 17 August 2012.
- LBEG (Landesamt für Bergbau, Energie und Geologie): CO<sub>2</sub>-Speicherung, available at: [http://www.lbeg.niedersachsen.de/energie\\_rohstoffe/co2speicherung/co2-speicherung-935.html](http://www.lbeg.niedersachsen.de/energie_rohstoffe/co2speicherung/co2-speicherung-935.html) (last access: May 2017), 2012.
- Mayring, P.: *Einführung in die qualitative Sozialforschung*, München, 1990.
- NRC: *Public Participation in Environmental Assessment and Decision Making*, National Research Council, Washington DC, 2008.
- Petts, J., Homan, J., and Pollard, S.: Participatory risk assessment: involving lay audiences in environmental decisions on risk, Environment Agency R&D Technical Report E2-043/TR/01, Environment Agency, Bristol, 2003.
- Refsgaard, J. C., Henriksen, H. J., Harrar, W. G., Scholten, H., and Kassahun, A.: Quality assurance in model based water management—review of existing practice and outline of new approaches, *Environ. Model. Softw.*, 20, 1201–1215, 2005.
- Richardson, G. P. and Andersen, D. F.: Teamwork in group model building, *Sys. Dyn. Rev.*, 11, 113–137, 1995.
- Röckmann, C., Ulrich, C., Dreyer, M., Bell, E., Borodzicz, E., Haapasaaari, P., Hauge, K. H., Howell, D., Mäntyniemi, S., Miller, D., Tserpes, G., and Pastoors, M.: The added value of participatory modeling in fisheries management – what has been learnt?, *Mar. Policy*, 36, 1072–1085, 2012.
- Scheer, D.: *Computersimulationen in politischen Entscheidungsprozessen: Zur Politikrelevanz von Simulationswissen am Beispiel der CO<sub>2</sub>-Speicherung*, Springer SV, Wiesbaden, 2013.
- Scheer, D.: In silico science for climate policy: how policy-makers process and use carbon storage simulation data, *Environ. Sci. Policy*, 47, 148–156, 2015.
- Scheer, D., Benighaus, C., Benighaus, L., Renn, O., Gold, S., Röder, B., and Böhl, G.-F.: The distinction between risk and hazard: understanding and use in stakeholder communication, in: *Risk Analysis* 34/7, 1270–1285, 2014.
- Scheer, D., Konrad, W., Class, H., Kissinger, A., Knopf, S., and Noack, V.: Expert involvement in science development: (re-)evaluation of an early screening tool for carbon storage site characterization, *International Journal of Greenhouse Gas Control*, 37, 228–236, 2015.
- Schrader, C.: *Expressfahrstuhl für Salzwasser*, Süddeutsche Zeitung, p. 16, 13 October 2014.
- Simon, C. and Etienne, M.: A companion modelling approach applied to forest management planning, *Environ. Model. Softw.*, 25, 1371–1384, 2010.
- Steier, F., Brown, J., and Mesquita da Silva, F.: *The World Cafe in Action Research Settings*, in: *The SAGE handbook of action research* (third), edited by: Bradbury, H., London; Thousand Oaks: SAGE Publications, 2015.
- Stern, P. C. and Fineberg, H. V.: *National Research Council*, Washington DC, 1996.
- Stirling, A.: Risk, uncertainty and precaution: some instrumental implications from the social sciences, in: *Negotiating Environmental Change: New Perspectives from Social Science*, edited by: Berkhout, F., Leach, M., and Scoones, I., Edward Elgar, Cheltenham, 33–74, 2003.
- van den Belt, M.: *Mediated modeling*, in: *A System Dynamics Approach to Environmental Consensus Building*, Island Press, Washington, 2004.
- Wassermann, S., Schulz, M., and Scheer, D.: Linking public acceptance with expert knowledge on CO<sub>2</sub> storage: outcomes of a Delphi approach, *Energy Procedia*, 4, 6353–6359, 2011.
- Webler, T., Tuler, S., and Dietz, T.: Modellers’ and outreach professionals’ views on the role of models in watershed management, *Environ. Policy Gov.*, 21, 472–486, 2011.