

Received August 26, 2019, accepted September 13, 2019, date of publication September 30, 2019, date of current version October 24, 2019.

Digital Object Identifier 10.1109/ACCESS.2019.2944389

Evaluating Indoor Positioning Systems in a Shopping Mall: The Lessons Learned From the IPIN 2018 Competition

VALERIE RENAUDIN¹, (Member, IEEE), MIGUEL ORTIZ¹, JOHAN PERUL¹, JOAQUÍN TORRES-SOSPEDRA², ANTONIO RAMÓN JIMÉNEZ³, ANTONI PÉREZ-NAVARRO⁴, GERMÁN MARTÍN MENDOZA-SILVA², FERNANDO SECO³, Yael LANDAU⁵, REVITAL MARBEL⁵, BOAZ BEN-MOSHE⁵, XINGYU ZHENG⁶, FENG YE⁶, JIAN KUANG⁷, YU LI^{6,7}, XIAOJI NIU⁷, VLAD LANDA⁵, SHLOMI HACOEN^{8,9}, NIR SHVALB⁹, CHUANHUA LU¹⁰, HIDEAKI UCHIYAMA¹¹, DIEGO THOMAS¹², ATSUSHI SHIMADA¹², RIN-ICHIRO TANIGUCHI¹², ZHENXING DING¹³, FENG XU¹³, NIKOLAI KRONENWETT¹⁴, BLAGOVEST VLADIMIROV¹⁵, SOYEON LEE¹⁵, EUNYOUNG CHO¹⁵, SUNGWOO JUN¹⁵, CHANGEUN LEE¹⁵, SANGJOON PARK¹⁵, YONGHYUN LEE¹⁶, JEHYEOK REW¹⁶, CHANGJUN PARK¹⁶, HYEONGYO JEONG¹⁶, JAESEUNG HAN¹⁶, KEUMRYEOL LEE¹⁶, WENCHAO ZHANG¹⁷, XIANGHONG LI¹⁷, DONGYAN WEI¹⁷, YING ZHANG¹⁸, SO YOUNG PARK¹⁹, CHAN GOOK PARK¹⁹, STEFAN KNAUTH²⁰, GEORGIOS PIPELIDIS²¹, NIKOLAOS TSAMITROS²¹, TOMÁS LUNGENSTRASS²², JUAN PABLO MORALES²², JENS TROGH²³, DAVID PLETS²³, (Member, IEEE), MIROSLAV OPIELA²⁴, SHIH-HAU FANG^{25,26}, YU TSAO²⁷, YING-REN CHIEN²⁸, SHI-SHEN YANG²⁸, SHIH-JYUN YE^{25,26}, MUHAMMAD USMAN ALI^{29,30}, SOOJUNG HUR²⁹, AND YONGWAN PARK²⁹

¹GEOLoc Laboratory, AME Department, The French Institute of Science and Technology for Transport, Development and Networks, 44340 Nantes, France

²Institute of New Imaging Technologies, Universitat Jaume I de Castellón, 12071 Castellón de la Plana, Spain

³Centre for Automation and Robotics (CAR), Consejo Superior de Investigaciones Científicas (CSIC)-Universidad Politécnica de Madrid (UPM), 28500 Madrid, Spain

⁴Faculty of Computer Sciences, Multimedia and Telecommunication, Internet Interdisciplinary Institute, Universitat Oberta de Catalunya, 08018 Barcelona, Spain

⁵Department of Computer Science, Ariel University, Ariel 40700, Israel

⁶State Key Laboratory of Information Engineering in Surveying, Mapping and Remote Sensing (LIESMARS), Wuhan University, Wuhan 430079, China

⁷GNSS Research Center, Wuhan University, Wuhan 430079, China

⁸Department of Mechanical Engineering, Ariel University, Ariel 40700, Israel

⁹Department of Industrial Engineering and Management, Ariel University, Ariel 40700, Israel

¹⁰Graduate School of Information Science and Electrical Engineering, Kyushu University, Fukuoka 819-0395, Japan

¹¹Library Department, Kyushu University, Fukuoka 819-0395, Japan

¹²Faculty of Information Science and Electrical Engineering, Kyushu University, Fukuoka 819-0395, Japan

¹³State Information Center, Beijing 100045, China

¹⁴Institute of Systems Optimization, Karlsruhe Institute of Technology, 76131 Karlsruhe, Germany

¹⁵Electronics and Telecommunications Research Institute, Daejeon 34129, South Korea

¹⁶HANA MICRON, Asan 13486, South Korea

¹⁷Aerospace Information Research Institute (AIR), Chinese Academy of Sciences (CAS), University of Chinese Academy of Sciences (UCAS), Beijing 100094, China

¹⁸Google Inc., Mountain View, CA 94043, USA

¹⁹Mechanical and Aerospace Engineering Department, Seoul National University, Seoul 08826, South Korea

²⁰Faculty for Geomatics, Computer Science and Mathematics, Hochschule für Technik Stuttgart, 70174 Stuttgart, Germany

²¹Software and Systems Engineering Research Group, Institut für Informatik, Technische Universität München, 80333 Munich, Germany

²²AraraDS, Arara, Santiago 7500007, Chile

²³imec-WAVES, Department of Information Technology, Ghent University, 9000 Gent, Belgium

²⁴Institute of Computer Science, Faculty of Science, P. J. Šafárik University (UPJS), 04001 Košice, Slovakia

²⁵Department of Electrical Engineering, Yuan Ze University, Zhongli 32003, Taiwan

²⁶MOST Joint Research Center for AI Technology and All Vista Healthcare, Taipei 10617, Taiwan

²⁷Research Center for Information Technology Innovation, Academia Sinica, Taipei 11529, Taiwan

²⁸Department of Electrical Engineering, National Ilan University, Yilan 26047, Taiwan

²⁹Department of Information and Communication Engineering, Yeungnam University, Gyeongsan 38541, South Korea

³⁰Department of Computer Science, Faculty of Computing and IT, University of Gujrat, Gujrat 50700, Pakistan

Corresponding authors: Valerie Renaudin (valerie.renaudin@ifsttar.fr), Joaquín Torres-Sospedra (jtorres@uji.es), Antonio Ramón Jiménez (antonio.jimenez@csic.es), Antoni Pérez-Navarro (aperez@uoc.edu), Boaz Ben-Moshe (benmo@g.ariel.ac.il), Xingyu Zheng (380407078@qq.com), Yu Li (yulinav@whu.edu.cn), Hideaki Uchiyama (uchiyama@limu.ait.kyushu-u.ac.jp), Zhenxing Ding (cw0216@sina.com), Nikolai Kronenwett (nikolai.kronenwett@kit.edu), Soyeon Lee (sylee@etri.re.kr), Dongyan Wei (weidongyan@aoc.ac.cn), Ying Zhang (yingzhang@google.com), Stefan Knauth (stefan.knauth@hft-stuttgart.de), Georgios Pipelidis (georgios.pipelidis@tum.de), Tomás Lungenstrass (tomas@ararads.com), Jens Trogh (jens.trogh@ugent.be), Miroslav Opiela (miroslav.opiela@upjs.sk), Shih-Hau Fang (shfang@saturn.yzu.edu.tw), Ying-Ren Chien (yrchien@niu.edu.tw), and Yongwan Park (ywpark@yu.ac.kr)

This work was supported in part by the French Pays de la Loire Regional Council through Etoiles Montantes under the organization of IPIN2018 international competition under Grant 2017-10671, in part by the Atlantis Shopping Mall, in part by the Project REPIN Plus under Grant TEC2017-90808-REDT, in part by the ICT Research and Development Program of MSIT/IITP, South Korea, (Development of Precise Positioning Technology for the Enhancement of Pedestrian Position, Spatial Cognition and Sports Competition Analysis), through the ETRI Team under Grant 2017-0-00543, in part by the JSPS KAKENHI through the Kyushu Team under Grant JP18H04125, in part by the Slovak Grant Agency, Ministry of Education and Academy of Science, Slovak, through UPJS Team, under Grant 1/0056/18, in part by the Slovak Research and Development Agency through UPJS Team under Contract APVV-15-0091, in part by the German federal Ministry of Education and Research Programme “FH-Impuls 2016” through HFTS Team under Contract 13FH91011A, in part by the Ministry of Science and Technology (MOST), Taiwan, through the YAI Team under Grant MOST 108-2634-F-155-001, and in part by the Strategic Priority Research Program of the Chinese Academy Sciences under Grant XDA17040202.

ABSTRACT The Indoor Positioning and Indoor Navigation (IPIN) conference holds an annual competition in which indoor localization systems from different research groups worldwide are evaluated empirically. The objective of this competition is to establish a systematic evaluation methodology with rigorous metrics both for real-time (on-site) and post-processing (off-site) situations, in a realistic environment unfamiliar to the prototype developers. For the IPIN 2018 conference, this competition was held on September 22nd, 2018, in Atlantis, a large shopping mall in Nantes (France). Four competition tracks (two on-site and two off-site) were designed. They consisted of several 1 km routes traversing several floors of the mall. Along these paths, 180 points were topographically surveyed with a 10 cm accuracy, to serve as ground truth landmarks, combining theodolite measurements, differential global navigation satellite system (GNSS) and 3D scanner systems. 34 teams effectively competed. The accuracy score corresponds to the third quartile (75th percentile) of an error metric that combines the horizontal positioning error and the floor detection. The best results for the on-site tracks showed an accuracy score of 11.70 m (Track 1) and 5.50 m (Track 2), while the best results for the off-site tracks showed an accuracy score of 0.90 m (Track 3) and 1.30 m (Track 4). These results showed that it is possible to obtain high accuracy indoor positioning solutions in large, realistic environments using wearable light-weight sensors without deploying any beacon. This paper describes the organization work of the tracks, analyzes the methodology used to quantify the results, reviews the lessons learned from the competition and discusses its future.

INDEX TERMS IPIN, competition, indoor positioning, smartphone.

I. INTRODUCTION

The international conference on Indoor Positioning Indoor Navigation (IPIN) brings together every year around 400 experts from the industrial and academic world to discuss the uses of indoor geolocation, discover the best technologies in indoor positioning and indoor navigation and share the latest innovations. The 9th edition took place in Nantes from 24 to 27 September 2018 and reunited more than 40 nationalities. A competition took place in parallel to the congress and allowed teams to compete against each other on pedestrian tracks in a very challenging realistic scenario: a shopping mall.

Several previous indoor competition editions were held within the EvAAL framework [1], [2] in the past. Although the IPIN Conference runs competitions in parallel to the conference using the EvAAL framework since 2014, this approach was formally adopted by the IPIN Competition in 2016 [3]. Other competitions, such as the Microsoft Indoor Localization Competition at the International Conference on Information Processing in Sensor Networks [4]–[6] or the GEO-IOT world [7], targeted similar on-site competitions. The main goal of the on-site competitions is not only to assess the performance of the competing systems but also to evaluate the ability of the teams to configure their indoor positioning

solutions and to successfully work in a new environment in a very short time, usually in less than 24 hours. In the past, on-site competitions were mainly performed in conference venues, including hotels, convention centres and university buildings.

Evaluating indoor positioning systems through data sets is now emerging (e.g., Perfloc [8] or the IEEE CTW 2019 Positioning Algorithm Competition [9]), since it enables all teams to work with the same data and technologies for fair benchmarking. Contrary to on-site competitions, where the teams have to survey the area in their own way for calibration purposes, off-site competition organizers provide all the required data to calibrate and evaluate the indoor positioning systems. Thus, since IPIN 2015, the indoor competition includes an off-site track. At first, it was based on a Wi-Fi fingerprinting database collected at three different buildings in a university campus [10]. Since 2016, the Smartphone-based off-site track provides all data that can be captured in real-time with a smartphone [11]–[13]. Using data sets for the competition has enabled the inclusion of new buildings, which in turn added diversity to the evaluation areas.

However, these past competitions did not include complex realistic indoor spaces such as public populated environments, which provide an extra challenge and are of high relevance for any real-life indoor application. Although the conference venues were populated, some restrictions applied to the on-site competitions to avoid disturbing the conference

The associate editor coordinating the review of this manuscript and approving it for publication was Akansha Singh.

regular activities. Therefore, in 2018, we decided to target this issue and organized the IPIN competition in a shopping mall, Atlantis. Thus, calibration, site surveying and evaluation were performed under realistic conditions during commercial opening hours, including rush hours with crowded corridors. To better reflect the challenges introduced by this new scenario, as well as the latest innovations in indoor positioning technologies, a total of four different competition tracks, two on-site and two off-site, were organized in the shopping mall. This paper aims at presenting the methodology adopted to organize this competition and discussing the results achieved by the competitors before drawing general conclusions.

The paper is structured as follows. Sections II and III describe the preparatory work: design of the pedestrian routes, geo-positioning of the reference points in the building and creation of data sets for the off-site tracks. Section IV focuses on the different approaches deployed by the competitors. Section VI draws the lessons learned from the competition at the levels of the organization and the participants.

II. PREPARATION OF IPIN 2018 COMPETITION TRACKS AND DATASETS

This section describes the preparation of the IPIN 2018 competition tracks, which has been carried in partnership with the French High School of Surveyors and Topographers (ESGT), under the supervision of the GEOLoc laboratory of the French Institute of Science and Technology for Transport, Development and Networks (IFSTTAR). The competition was also prepared in collaboration with the Institute of New Imaging Technologies (INIT) from Universitat Jaume I and other institutions.

The IPIN competition basically consists of two main parts: an *on-site* and *off-site* competition, although every part can have one or more tracks in the competition:

- The *on-site* challenges occur at the competition location, i.e. the conference venue or, as in this case, a shopping mall. The teams deploy their own Indoor Positioning System (IPS), respecting and obeying the restrictions set by organizers, and estimate in real-time the coordinates of the target points as they are reached by the person carrying the location system and following a track previously arranged by the organizers. Competitors are allowed to access the venue the day before the competition for calibration and site survey.
- The *off-site* challenges allow competitors to calculate traces from data provided to them before the competition. Data are of various nature: Wi-Fi, magnetic field, inertial signals, Bluetooth Low Energy (BLE), etc. They comprise two parts provided to competitors: The first part of the dataset is recorded on a geolocated path (or paths) where the geographical coordinates of the reference points and the corresponding data are provided; this path is used for calibration; the second part of the dataset are raw data from the same location where previous data were taken, and their coordinates must be estimated by

the competitors. To ensure fair competition, an additional site survey is not allowed to competitors.

In both cases, a common evaluation framework is applied. The individual positioning error corresponds to the 2D positioning error plus a penalty term in the case of incorrect floor detection. The final score is either calculated in meters at the third quartile or extracted from the function of cumulative error distribution at the third quartile. This information corresponds to the highest error for the 75% of the estimates. Several recommendations of the ISO/IEC standard 18305:2016 [14] have been taken into account to define the IPIN 2018 competition performance metrics.

A. TWO ON-SITE CHALLENGES

On-site challenges involve competitors who compute the coordinates of the waypoints on which they walk, in real-time and using their technology. Computation was not limited to the embedded or hand-held devices, but competitors had to provide the estimated locations of the evaluation waypoints immediately after reaching the end of the evaluation path. i.e., post-processing was not allowed. All estimated coordinates must be reported by the competitors to the organizers when the end of the route is reached. *On-site* competition comprised two challenges, which only allowed hardware worn on the upper body part, prohibiting Lidar technology and infrastructure deployment in the environment. Indeed, Lidar mobile mapping systems are generally for accurate indoor mapping. They are considered as reference solutions rather than personal navigation systems to be tested. As described in the next section, a Lidar system was used to compute the 10 cm accurate coordinates of all the waypoints. There were two on-site competition tracks: camera-based and non-camera-based.

1) TRACK 1: CAMERA-BASED POSITIONING CHALLENGE

The 1st *on-site* challenge allowed the use of camera enabling vision-based localization. All vision-based technologies were accepted except laser-based technology, like Lidar, that was excluded from the competition. Competitors were allowed to visit the shopping mall during normal opening hours the day before the competition for calibration and surveying purposes, but they were not allowed to install any kind of hardware that could help their device to estimate the location (e.g., BLE beacons, Wi-Fi routers or UWB tags). This prohibition was also in compliance with the Infrastructure-Free requirement placed by the shopping mall regulation. The track organizers provided the coordinates and heading of the starting point on the competition day. During the competition, competitors were asked to perform some specific actions, classically done by pedestrians indoors. Fig. 1 illustrates some of these actions: sitting on a bench, going upstairs and standing on a conveyor belt.

2) TRACK 2: NON-CAMERA-BASED POSITIONING CHALLENGE

The 2nd *on-site* challenge followed the same rules and requirements as Track 1, but the use of cameras was



FIGURE 1. Photos of the diversity of environments and pedestrian motion types for the competition (travelator, sitting on a bench, staircase).

forbidden. All equipment had to be carried on the upper part of the human body, including trouser pockets. This restriction was added to the track to explicitly exclude foot-mounted Pedestrian Dead Reckoning (PDR) techniques, addressed in Track 4. Competitors were asked to perform similar actions as in Track 1.

B. TWO OFF-SITE CHALLENGES

Following a pre-study and the experience of previous IPIN competitions, two *off-site* tracks were defined for the off-site challenges, namely the *Smartphone-based positioning challenge* and *Foot-mounted IMU and GNSS based positioning challenge*.

1) Track 3: Smartphone-based positioning challenge

The first *off-site* challenge aimed at testing the location technologies solely based on smartphone measurements recorded by a person who had walked through the mall. This track matched the off-site tracks organized in the 2016 [12] and 2017 [11] IPIN competitions.

To determine the parts of the shopping mall that were usable for the *off-site* smartphone-based positioning, several data acquisitions were carried out with the “GetSensorData” Android application version 2.0 [13]. This application records all data acquired with most of the sensors embedded in a smartphone (WiFi RSS, Inertial measurements, Bluetooth low energy RSS, GNSS location, pressure, light and sound intensity, . . .), and stores it in a log file. We divided the shopping mall area into five parts and performed a loop in each part to collect the data. These data were analyzed to identify the areas that could not be used for the competition: without Wi-Fi or BLE coverage or white coverage areas.

The analysis showed that all regions were sufficiently covered, except for some parts of the car parking areas where the Wi-Fi signal was particularly weak. Data provided to the competitors for this challenge were registered with the same “GetSensorData” Android application in three phases: training, validation and evaluation.

For the training and validation phases, some short trajectories were defined in the evaluation area to record the required data. Training data is usually used for calibrating the IPS, whereas validation data can be used by the teams to estimate the accuracy of the developed solution. However, competitors can use both datasets at their own discretion. Each short trajectory was collected multiple times in both walking directions. A total of 22 training and 15 validation log files were provided to the competitors.

A 1 km path was recorded with the application for the evaluation phase, generating a blind evaluation log file without reference waypoints. This dataset provided to the competitors for track 3 [15] (raw signals and reference points coordinates) can be downloaded for further bench-marking. Fig. 2 (left part) shows the data acquisition for Track 3.



FIGURE 2. Smartphone data collection in the shopping mall for Track 3 (left part). Foot-mounted PERSY device used in Track 4, which includes a STIM 300 inertial unit, an HMC5983 magnetometer and a NEO-M8T GNSS receiver (right part).

2) TRACK 4: FOOT-MOUNTED IMU AND GNSS BASED CHALLENGE

The second *off-site* track was dedicated to foot-mounted inertial and GNSS navigation. The data were collected with the unit PERSY (Personal Reference SYstem, Fig. 2 right part) developed by GEOLOC at IFSTTAR. It comprises a 9 degrees of freedom inertial unit and a GNSS receiver and antenna [16], [17]. Two datasets were prepared. The first one was used for sensor calibration and the second one for the calculation of the coordinates of the waypoints. The usage of maps was completely forbidden in this track.

First, the magnetometer calibration dataset was recorded in an undisturbed geomagnetic environment by performing rotations around the different sensor axes. It is a standard procedure for ellipsoid fitting based magnetometer calibration algorithms [18]. It was complemented with data for conducting an Allan variance analysis [19], [20] of signals recorded during several hours in a static location to determine

noise and measurement bias of inertial sensors. These data were provided to the participants to enable them to calibrate the device with their algorithms.

Finally, a dataset was recorded over 1 km of walking distance on three floors and provided to the competitors for the computation of the coordinates of the waypoint. The purpose of this challenge was to compare pedestrian navigation algorithms based on inertial, GNSS and magnetic measurements on similar data. The dataset provided to the competitors for Track 4 [21] (raw signals and reference points coordinates) can be downloaded for further bench-marking.

III. ACCURATE MAPPING OF THE TRACKS

This section describes all the steps carried out to accurately map all the tracks, in the form of a sequence of ground-truth points whose coordinates were determined with 10 cm accuracy to enable the competitors’ IPS performance assessment.

A. DEFINITION OF THE EVALUATION TRACKS

The first task consisted in defining the evaluation tracks in the shopping mall for the four challenges proposed in the IPIN 2018 Competition. To avoid that competitors in one Track could get information from other tracks, different paths were used for every single challenge. On the other hand, it is important to note that it was the first time that, to make it more realistic, the competition took place in a very large, real-life public environment, which complicated the challenge. The shopping center Atlantis has 151 stores and 31 restaurants on a 14 000 m² area spread over 3 levels.

The four paths were sketched on the floor maps. We considered the positioning technologies involved in the challenge when designing the evaluation track and included some challenging parts such as stair climbing, passages by elevator or on a treadmill, breaks on benches, and other real-life activities in the shopping mall to resemble realistic walking trips. Table 1 shows the description of the four paths.

TABLE 1. Comparison of the four challenge paths.

<i>Real-time - on-site challenge</i>				
Path Name	Length	Floors	Breaks	Challenges
Track 1: Camera based	870 m	3	3	Use of traveller Parking area
Track 2: Non-Camera based	840 m	3	2	Use of traveller Use of stairs Outdoor area Parking area
<i>Post-processing - off-site challenge</i>				
Path Name	Length	Floors	Breaks	Type of spaces
Track 3: Smartphone-based	1 km	3	2	Use of elevator/lift Use of traveller
Track 4: Foot-mounted IMU	1 km	3	2	Outdoor areas Parking areas Use of traveller Use of stairs

Finally, the paths were plotted on the map and then characterized as a sequence of representative waypoints, mostly turns and intermediate points in long rectilinear paths. A total

of 180 waypoints were identified on the map. All the waypoints were later surveyed and mapped into WGS84, serving as ground truth. Although some waypoints are shared among the four tracks, their sequencing and the actual pedestrian route needed to reach them is different. Evaluation tracks with a large number of evaluation waypoints are necessary to conduct relevant statistical analysis of the positioning errors.

B. MATERIALIZATION OF THE TRACKS

The different paths were mapped in Autocad using the building’s floorplan, after a stage of clean-up and adaptation to our purposes. The organizers used small and discreet self-adhesive pads (Fig. 3) to mark the waypoints located on the ground surface. The solution had to be easily and quickly positioned on-site (due to their large number), not very visible (so as not to disturb the shopping mall staff and attract the attention of customers) and should be able to last for the surveying over several days. We placed the 180 stickers throughout the gallery, using the Autocad plans previously made. For each sticker, we had prepared an identification card with the serial number, sketches, photos and explanatory notes. These cards were used on the competition day to re-position all the waypoints.



FIGURE 3. Marking the ground points to map the 180 waypoints constituting the pedestrian tracks during the shopping mall survey (left part) and during the on-site competition day (right part).

C. SETTING UP A NETWORK OF REFERENCE SURVEY POINTS

Given the international nature of the competition, the geographical coordinates used in the competition were expressed in the standard system WGS84 instead of using a local or regional projection system. The coordinates of the waypoints were therefore provided in WGS84. Other geographical systems were used to post-process the measurements recorded by two dynamic scanners. The French RGF93 CC-47 projection system was adopted and the deformations due to linear distortion were compensated in the estimation of the coordinates.

As no reference points were marked in the various plans provided by the building’s architect, RGF93 reference points were surveyed. Two GNSS receivers Leica System 500 were used using the free pivot method. Five reference points were materialized and accurately surveyed outdoors.



FIGURE 4. GNSS survey including roof top static measurements.

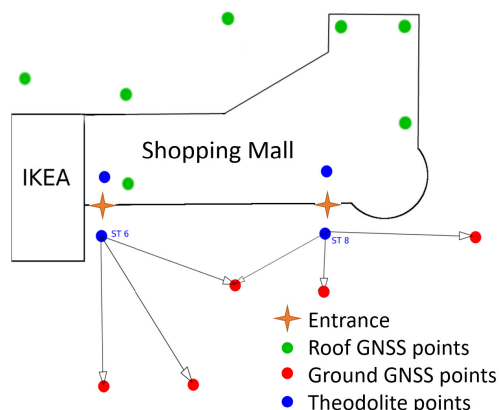


FIGURE 5. Network of GNSS and theodolite reference points used to georeference the shopping mall plans and perform global adjustment of indoor waypoints.

Several GNSS points, previously surveyed on the roof (Fig. 4), were used to ensure a good distribution throughout the shopping mall. The network of reference points is shown in Fig. 5.

Thanks to these reference points, it was possible to compute the coordinates of two stations located in front of the shopping mall entrances. Indoor stations were determined by theodolite measurements and served as reference points for the 3D scanner indoor mobile mapping. All indoor surveyed coordinates were transformed from RGF93 into WGS84 using the EUREF Permanent Network website considering that RGF93 corresponds to ETRF2000 and that ITRF2014 version 2017.91 is homogeneous with WGS84 within 10 centimeters. The same system was kept for the competition day that went through several months after the mobile mapping.

D. MOBILE MAPPING OF THE SHOPPING MALL

A total area of 9000 m² was dedicated to the competition and surveyed by two mobile scanners deployed by the Viametris company [22]. The bMS3D is carried in a backpack whereas the iMS3D is a mobile robot scanner. Both systems are shown in Fig. 6.



FIGURE 6. bMS3D-360 and iMS3D mobile mapping systems from Viametris.

The iMS3D was used in the galleries on the ground floor and the bMS3D was used for the paths on different floors, stairs and pedestrian parts in the car park area. The survey lasted two hours and did not include GNSS data. The bMS3D scanner surveys points up to a maximum distance of 30 meters with minimized noise but can theoretically aim for further distances. The iMS3D scanner surveys points up to 30 meters, but it is programmed to 10m to 15m for the same reasons. The iMS3D includes three profiling lasers and a panoramic camera to colorize the point cloud. Unlike the fixed laser scanner, which measures all around it thanks to a rotation of its laser, the profiling laser propagates only in lateral and horizontal planes. It is the movement of the operator that allows the acquisition of a complete point cloud. Its characteristics are a precision of 2 cm to 3 cm for a resolution of 80 000 points/s. It has a 10 cm per 100 m deviation in the horizontal plane. Coordinates were estimated by Simultaneous Localization And Mapping (SLAM) processing. [23], [24] give tutorials on SLAM. The bMS3D comprises four cameras and two scanners. The cameras take pictures every second to colorize the cloud. An inertial unit estimates roll and pitch angles and provides the horizontal plane reference. Its characteristics are 50 cm per 100 m 3D deviation and 1 per 1000 deviation for the X and Y components. 50 cm up to 1 m deviations were observed in the dataset.

Known coordinates on the corners of walls at the ends of the gallery were needed for the global point clouds adjustment in a post-processing mode with PIMMS software [25]. They were surveyed with a theodolite and used to georeference the SLAM acquisition. The backpack survey started on a known reference point allowing connecting with iMS3D point cloud. A 5 per 1000 deviation was observed on the global adjustment due to dynamic obstacles (movements of persons) and due to the reflections on the mirrors and the

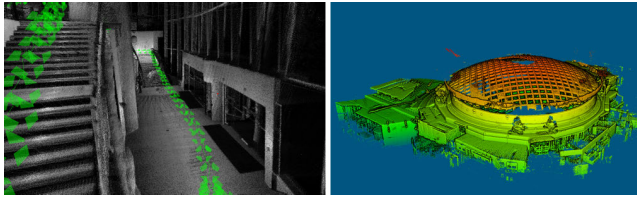


FIGURE 7. Keyframes in green (left) for the backpack acquisition and colored point clouds (right).

windows of shops through the gallery. The start and end positions of the acquisition were identical to close the loop and bond the drifting errors. Finally, the point clouds were colored using the photos to produce more realistic restitution of the scenes. Fig. 7 shows mobile mapping outputs and [26] is a video of the results. It was found that even the tile joints and the writings on the ground stickers could be seen in the final point clouds. The targets' coordinates were then extracted by hand from the georeferenced points clouds by analyzing the images. A 2 cm to 10 cm standard deviation on the 3D positioning error was obtained for all 180 reference points used to define the competition tracks and assess the performances of the competitors' systems. Maps were provided to the competitors—except to the teams participating in Track 4—as supplementary materials.

IV. INDOOR POSITIONING SOLUTIONS PROVIDED BY COMPETITORS

This section gives a short description of every technique deployed by the competitors in every track. The presentation of solutions is done according to the team name alphabetical order.

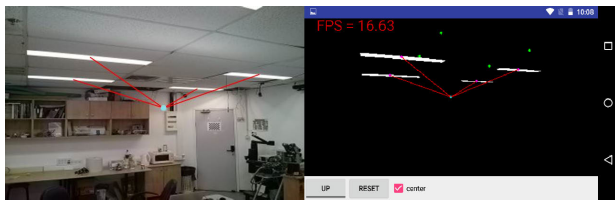


FIGURE 8. Detection of light-sources on a binary image and their extracted center mass points.

A. TRACK 1: CAMERA BASED POSITIONING CHALLENGE

1) ARIEL1 TEAM

a: VISUAL INDOOR POSITIONING

Team Ariel 1 considers a navigation system that includes a visual sensor (camera) and an orientation sensor. The process of extracting visual landmarks consists of the following two steps: Image processing and Extraction:

Image Processing: the ceiling lights are considered as landmarks, and a simple threshold filter can be used for their extraction as depicted in Fig. 8. That results in a binary image I_b from which the center mass, c , is extracted of each visual landmark. The process is performed in two main steps: first

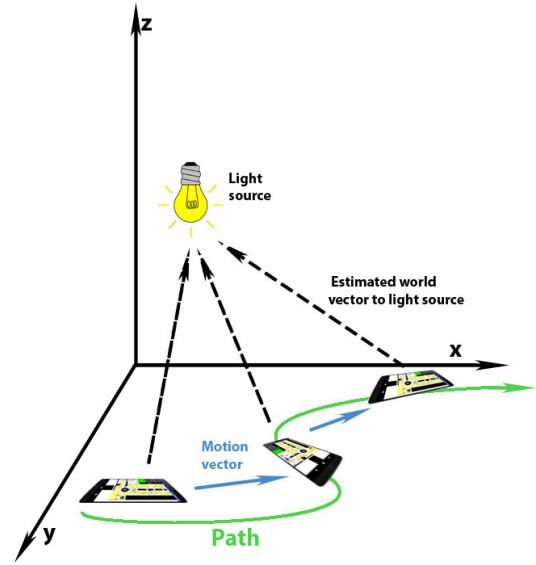


FIGURE 9. The concept of using ceiling lights as landmarks for indoor navigation.

extracting the contour γ of each landmark that appears in I_b ; and second, average through all points $g \in \gamma$. Fig. 9 shows the general concept of using lights for indoor navigation. Few additional geometric properties of each light-source are analyzed, including center, radius and a compact representation of its perimeter (contour).

Extraction: For each spotted visual landmark center c , represented as a two-dimensional vector $\vec{c} = (c_x, c_y)$, the relative world vector connecting the visual sensor and the landmark (in world coordinates) is pursued. The first step is to calculate the *Intrinsic* matrix $K_{3 \times 3}$ of the visual sensor which is known as “Camera Calibration”. The relative vector is then:

$$\vec{v} = w \cdot (c, 1)^T \cdot K^{-1} \tag{1}$$

where w is a scale factor of mapping \mathbb{R}^2 to \mathbb{R}^3 which is unknown. Hence, $\vec{v} \in \mathbb{R}^3$ can be calculated up to a scale. Finally, the acquired vector \vec{c} is rotated by the device self-orientation to align it with the world coordinate system.

b: PUT IT ALL TOGETHER

The system used implements pedometry (i.e step-counter, optical flow), that is used as a rough position estimation to define a region-of-interest. The fusion problem is addressed with a modified particle filter. Commonly a particle filter is used with the initial area of the filter covering all the evaluation map (and converging to the most likely Probability Density Function). Instead, in the proposed system the search is confined to the Region Of Interest (ROI). Once the ROI is reported the relevant particle's weight is increased. This way, the true position is likely to be inside the predefined area. To fuse detected visual landmarks, each particle's weight should be modified. Weights are modified according to some

weight function that compares the particle state with the true state. Some particles are periodically spread outside the ROI to overcome the ‘kidnap robot’ situation. The generic particle filter algorithm is presented below:

Algorithm 1 The Generic Particle Filter Algorithm

Data: ROI-point, ROI-radius, Particles, Landmarks

Result: Location.

```

for  $p \in \text{Particles}$  and  $vs \in \text{Landmarks}$  do
  state( $p$ )  $\leftarrow$  action(pedometry, $p$ );
  increase  $p$  weight if  $p \in \text{area}(\text{ROI}, \text{ROI-radius})$ ;
   $w \leftarrow$  weight-function( $p, vs$ );
  weight( $p$ )  $\leftarrow$  weight( $p$ ) $\cdot w$ ;
end
Location  $\leftarrow$  weighted-sum( $\text{Particles}$ );
  
```

A real-world localization scenario often includes complex sensory data: outliers, inaccurate and partial sensory information. Moreover, human factors can influence the sensor measurements and therefore contradict the pure Bayesian inference filter, see [27] for details regarding the ways to overcome those challenges.

c: VISUAL LANDMARKS MAPPING

The process of visual landmark mapping follows the following steps: 1) preprocess the visual measured data and extract the visual landmark vectors \vec{v}_w that correspond to each landmark (Section IV-A.1.a); 2) the visual landmarks are then registered (mapped) in real-world coordinates relative to the environmental map (note that the task of mapping a complex building such as a shopping mall that may have hundreds of light sources might be challenging and time-consuming); and 3), a light source is spotted and tracked along a path, the position of the light source is then estimated as the weighted average of all the intersections of the 3D vectors to that source.

d: FIELD EXPERIMENT AND RESULT IN A SHOPPING MALL

Few large scale experiments were performed in crowded shopping malls. Each experiment was divided into two steps: 1) Mapping; and 2) Localization and accuracy evaluation. Mapping an average size shopping mall can be done within a few hours including testing the map and validating it. The level of accuracy varied between high accuracy (0.5-2 meters) and low accuracy (5-20 meters) when the visual sensor was blocked.

2) ARIEL2 TEAM

Team ARIEL 2 presents a smartphone indoor positioning system (IPS) based on recent Augmented and Mix Reality (AR and MR) tools such as Google’s ARCore or Apple’s ARKit. The AR tools are used as visual pedometry (scaled optical flow) sensor, which is then fused with an advanced version of a localization particle filter to produce both accurate and robust solutions for various indoor positioning applications. The presented method allows a simple and efficient

mapping solution that, combined with the localization particle filter, allows 1-2 meter positioning accuracy in most standard indoor scenarios.

a: THE BASIS OF INDOOR POSITION

The user global position can be retrieved from existing geolocation services (e.g., Google Maps Geolocation API). Such user location is commonly approximated using radiofrequency (RF) signals (4G-3G, WLAN, BLE) and even weak global navigation satellite system (GNSS). The accuracy of such methods is considered to be ‘‘building level’’ (10 m to 50 m) or ‘‘room level’’ (5 m to 10 m). The user’s relative position is often computed using a pedometer. The smartphone-based pedometer is composed of two major virtual-sensors: 1) ‘‘Step-counter’’: which detects discrete step-events; and 2), Orientation sensor, which approximates the user’s global/relative direction. Combining the two parts allows a step-based relative path computation. Naturally, such a method tends to drift in time (and steps). Many modern IPSs combine the above two positioning methods to achieve an accurate and global localization (with no drift).

b: PARTICLE FILTER FOR LOCALIZATION

A particle filter method represents the posterior distribution of a set of particles P ($|P| = n$) on a given map, the result of such algorithm is a new set of particles P' with a (slightly) different distribution (see Algorithm 2).

Algorithm 2 Generic Particle Filter Localization Algorithm

Input: Black and white 2D map of each floor in the navigation region.

Init: generate a set P of n particles. For every $x_i \in P$ a random location $\langle x, y, z \rangle$ in uniform distribution over the map.

Result: Estimated 3D-Position : $l = \langle x, y, z, \rangle$

while True do

- 1) Estimated the current **movement** $\langle \Delta x, \Delta y, \Delta z \rangle$.
- 2) Apply an **action-function** on all particles in P .
- 3) **Evaluate** the weight of each particle according to its new position on the map.
- 4) **Re-sample** the particles $\rightarrow P'$
- 5) Report the current **best-position**.

end

In order to implement the above generic algorithm the following functions should be well-defined.

- **Movement estimation:** computes the 3D movement vector according to the scaled optical-flow algorithm.
- **Action function:** Translate each particle according to the movement vector (in 3D). To prevent the convergence of the particles from happening too fast (and by that risk missing the true location), a small random noise is added to each particle.

- **Evaluate:** compute the updated weight of each particle according to the map constraints.
- **Re-sampling:** The process of choosing a new set of particles P' from P according to the particles' weights.

c: ADVANCED ALGORITHM: AUGMENTED REALITY

The advanced algorithm improves the location accuracy thanks to improved mapping and sense functionality, both applicable using the new AR smartphones' technology. The field of AR has evolved dramatically in recent years. Major companies released powerful SDKs (e.g., Google's *ARCore* and Apple's *ARKit*), allowing developers to harness AR abilities for geolocation applications. AR platforms have the following features: **1.** Feature points detection and tracking. **2.** Visual-based optical-flow. **3.** Plane recognition and tracking. The first two allow estimating the user 3D-movement and orientation in real-time. This information can be used as an improved alternative for a *IMU*-based pedometer. The third feature is exploited to improve the mapping and the particle filter sense function. It is detailed in the two following subsections.

d: ADVANCED ALGORITHM: MAPPING

The advanced particle filter relies on the existence of a pre-made map (of the region of interest) divided into the following "colors", shown in Fig. 10. **A:** Accessible area (white), **B:** Unaccessible area, such as walls and fixed barriers (black or brown), **C:** Accessible area, in fixed width, tied to the **B** regions (pink), **D:** Area near floor-changing, such as stairs and elevators (yellow). The generated map is the foundation of the particle filter algorithm and further used to determine the particles' weights.

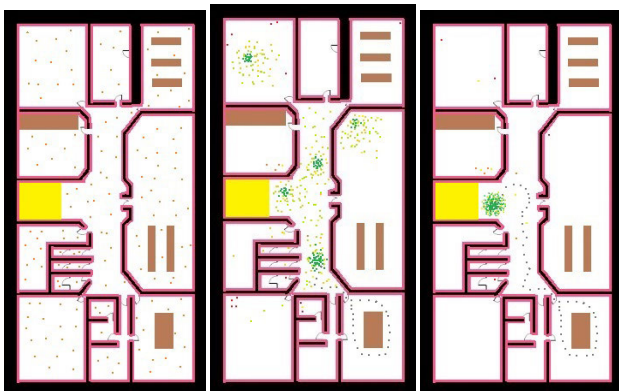


FIGURE 10. Evolution of the particles in the localization filter. In white: accessible zones (**A**) and in black and brown: inaccessible ones (**B**). At the init. state, the particles are uniformly distributed (left map). Using the short motion vector, the particles get organized in few clusters (middle map). Then the particles converged to a single position cluster (right map).

3) ETRI/HANA MICRON TEAM

ETRI/HANA MICRON team (ETRI team), as a part of an Indoor Navigation project, investigate vision-based localization approaches. They are interested in monocular visual

SLAM applications in public buildings like airports, train and subway stations, shopping malls, etc. A common problem in such dynamic environments is the presence of moving people and objects in the input images which degrade the accuracy of the localization results.

To deal with this, ETRI Team focused on the use of semantic information to process detected sparse features according to their reliability for localization purposes. A monocular SLAM is developed, following a common approach [28] using sparse feature-based visual odometry in combination with semantic segmentation filters on the input images.

In parallel to this approach, which requires continuous streaming of images from the phone camera to the PC based implementation, single image-based localization approaches with much lighter communication load were also investigated. More specifically, PoseNet [29] (based on the PyTorch implementation [28]) for relocalization was experimented, planning to replace it later with the map-based relocalization provided by visual SLAM.

The main implementation was not completed in time for the IPIN2018 competition and was ended up using the PoseNet based relocalization with a filter over the estimated positions. The implementation ran on a notebook computer receiving images from a smartphone at about 5 frames per second. On the day before the competition, images were collected from reference points (spaced about three meters apart) along a set of likely trajectories in the mall. The dataset preparation and model training were performed using cloud servers.

Looking back at the results, the relocalization approach performance was affected by the sparseness of the collected dataset and the limited time for model training/tuning. For example, several sections of the testing trajectory were outside of the areas covered by the dataset. Collecting only once along a trajectory resulted in the inclusion of a bright red service vehicle (used in light fixtures repair) that was gone by the time of the test run. In cases like this, when sufficient variance in the scene could not be captured, the ability to use additional semantic information would have been helpful.

4) GOOGLE TEAM

a: AR MOTION TRACKING

Recent developments on ARCore [30] for Android devices (based on the previous Project Tango) and ARKit [31] for iOS made it possible to accurately track motion using visual-inertial odometry (VIO) [32] in smartphones. The types of phones with ARCore enabled include Google Pixel, as well as various Samsung, LG, and Asus phones. However, the tracking is estimated with respect to the initial camera pose, not in a global coordinate frame. The Google Team proposed a method to automatically align a local trajectory with global coordinates, using either a few accurate landmarks – or reference positions –, such as visual markers on the map, and/or many noisy landmarks, such as the ones from the Android Fused Location Provider (FLP) [33].

b: RIGID TRAJECTORY ALIGNMENT

The solution proposed is a least-square minimization between global locations (λ, ϕ) where λ and ϕ stand for *longitude* and *latitude* in radians, and (x, y) are the local coordinates with respect to the initial pose of the camera, subject to the rigid 2D transformation: (x_0, y_0, α) . Time-stamped local trajectories are recorded with corresponding global anchor locations, then perform point-wise least-square error minimization is performed:

$$\min_{x_0, y_0, \alpha} \sum w[(x_b - x_t)^2 + (y_b - y_t)^2] \quad (2)$$

with w a weight for the position. Anchor (x_b, y_b) corresponds to the locations from global latitude / longitude:

$$\begin{aligned} x_b &= (\lambda - \lambda_0) \cdot \cos(\phi_0) \cdot R \\ y_b &= (\phi - \phi_0) \cdot R \end{aligned} \quad (3)$$

where R is the radius of the Earth (6 378 137 m) and (λ_0, ϕ_0) indicates the start location of the camera, (x_t, y_t) are the local trajectory coordinates obtained by motion tracking:

$$\begin{aligned} x_t &= x_0 + \cos(\alpha) \cdot x + \sin(\alpha) \cdot y \\ y_t &= y_0 - \sin(\alpha) \cdot x + \cos(\alpha) \cdot y \end{aligned} \quad (4)$$

For FLP locations, w was set to $1/d^2$ where d is the reported accuracy in meters. For user-provided accurate landmarks, d was small, e.g. 0.1 m, which results in large w . Given the 2D transformation (x_0, y_0, α) computed from Eq. (2), and any coordinates from the location trajectory (x_t, y_t) , the locations in the global coordinate system are obtained:

$$\begin{aligned} \hat{\lambda} &= \lambda_0 + (x_t / (R \cdot \cos(\phi_0))) \\ \hat{\phi} &= \phi_0 + (y_t / R) \end{aligned} \quad (5)$$

The optimization is performed at a 0.1 Hz fixed sampling rate in real-time.

c: LANDMARKS FROM INITIAL LOCATION AND DIRECTION

For the 2018 IPIN competition, the initial location (λ_0, ϕ_0) and direction (θ_0) were given and used as accurate global markers. The initial location (λ_0, ϕ_0) is a landmark by definition. The initial direction was used to compute the second landmark, by $\lambda_1 = \lambda_0 + L \cos(\theta_0)$, $\phi_1 = \phi_0 + L \sin(\theta_0)$, where L is the length along the initial direction.

d: FLOOR DETECTION

The accuracy of ARCore is around 2 cm in the horizontal plane, but it is noisy vertically. Vertical changes obtained from ARCore for indicating the vertical movement only, and the barometer sensor was used to obtain the actual height changes. It was assumed that all floors were the same height. The system worked well in most buildings, but failed in Atlantis Mall in testing, as the height of the second floor was significantly lower than the first.

e: MULTI-SEGMENT ALIGNMENT

Although ARCore is accurate locally, it may jump in distance or direction from time to time. It is mandatory to detect those jumps and perform global alignment to each segment. All segments except the first are used as FLP global anchors, as no interaction with the map can be performed during the test.

B. TRACK 2: NON-CAMERA BASED POSITIONING CHALLENGE

1) ETRI/SNU/HANA MICRON TEAM

This technical description presents the indoor positioning technology that was implemented on a smartphone for the Track 2 of IPIN 2018 competition by ETRI team.

Most smartphone-based indoor positioning applications implement a hybrid approach based on multiple resources such as Wi-Fi, BLE signals and inertial sensors. Since the proposed ongoing project targets commercially available product, ETRI Team focused on pure smartphone-based PDR and image-based localization, from the perspective of maintainability and sustainability. For Track 2 competition, PDR was applied as one single source of positioning. Since the competition venue of IPIN2018 was a large commercial mall, it was quite challenging for smartphone PDR to maintain the required level of accuracy during the course of the competition. To deal with this situation, an intrinsic PDR algorithm was tried to be enhanced.

PDR system consists of three basic steps: step detection, step length and heading estimation. To detect a step, peak detection using accelerometer magnitude is widely used in PDR. However, simple peak detection method only compares current and previous accelerometer values, which degrades detection accuracy. In order to eliminate unwanted steps, the detected timestamps between steps and threshold value are considered. Once a step is detected, then the relative distance between current and previous steps is estimated. One of the powerful factors to estimate step length is to use linear relationship between step frequency and step length; the faster a user walks, the longer the step length is [34]. Another feature that is correlated with step length is the vertical acceleration. These two features are linearly combined for the stable step length estimation. Besides that, step length values are adjusted for certain walk patterns, such as corner walk, staircase walk, etc. Heading accuracy is closely related to the overall performance of PDR. Even though step detection and step length estimation are accurately done, the position accuracy is severely and gradually degraded when the device is not pointing along the walking direction. The direction of the device was then estimated using built-in gyroscope and accelerometer filtered in an attitude reference system (ARS). ARS exploits attitude calculated by gyroscope and accelerometer. Accelerometer output gives the roll and pitch angles under stationary condition. In order to combine the attitudes from gyroscope and accelerometer, Extended Kalman Filter (EKF) is applied to estimate the error states:

attitude errors and gyro bias. Gyroscope bias is continuously updated and the acceleration vector is used as a measurement when stationary condition is detected.

In parallel, the use of semantic information was devised to assist heading drift, which causes a critical error in localization. Here, semantic information includes map information such as nearby angle values, floor change zone, etc. Dynamic heading adjustment was applied using the semantic information, and it was proven reasonable performance in the ETRI team site.

Looking back at the result, the performance of the approach was affected by the limited time for exploring the competition site and data verification. We found to main reasons of unsatisfactory performance at the time of competition. One is misaligned map information, and the other is delayed logging of estimates for waypoints. Although the error compensation using external information worked well, it was challenging to endure such a long path without any other positioning aid.

2) KYUSHU TEAM

This technical description presents the indoor positioning technology that was implemented based on PDR and Map Matching for the Track 2 of IPIN 2018 competition by Kyushu team.

Since the chest has fewest unexpected movements in the upper body while walking compared with a hand or a head, it was selected as a novel IMU installation position. As well as other PDR frameworks, a step is first detected, and then a step length and direction are computed from the temporal sequence of accelerations and angular velocities. To adapt the PDR system to the chest-mounted IMU, novel regression model is proposed based o step length and direction estimation. In addition, an efficient map matching algorithm based on particle filter with barometric pressure was integrated. This largely suppresses the error accumulation on the position and heading of the pedestrian in the building when the step estimation causes some error. For the development, NGIMU¹ was used. It can be wirelessly connected to a laptop so that the computation was performed on the laptop. The detailed description has already been published [35], and the source code is available online.²

a: STEP ESTIMATION

To separate the sequential data into the steps,an approach based on filtering and thresholding for the norm of the acceleration was “used. This process is the same as that in other PDR systems. The norm of the 3D acceleration in the sequence is first computed, and a low pass filter is applied to it. Finally, the peeks are extracted because they correspond to the moments when the foot hits the ground. In other words, one step is defined as the interval from a peek to the next one.

The next process is to compute the step length and direction. Fig.11 illustrates the conceptual figure on the

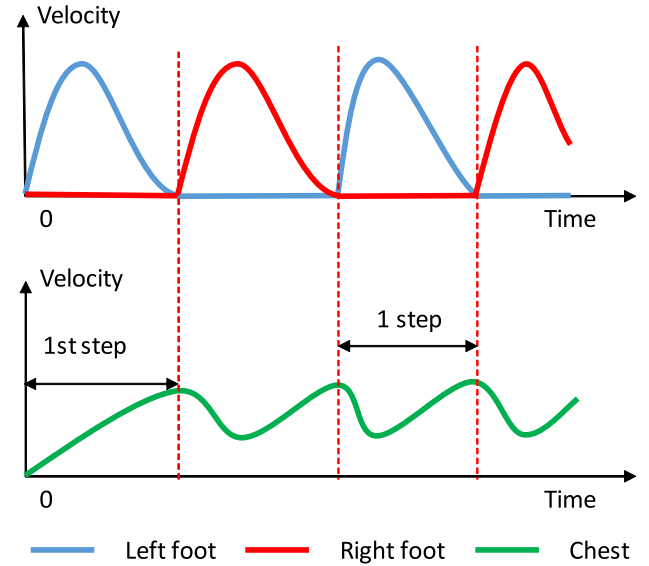


FIGURE 11. Conceptual figure on velocity changes at foot and chest.

velocity changes of foot and chest while walking. For the foot-mounted IMU, zero velocity update is useful because the foot can be fixed while it is attached on the ground. However, the chest normally does not stop while walking, and its velocity change is periodic. From this characteristic, it was empirically formulated that the displacement of one step can be computed by:

$$D = K \cdot \iint a(t) dt dt \tag{6}$$

where $a(t)$ is the 3D acceleration at time t , the range of the integral is the duration of one step, and K is a scalar parameter that needs to be calibrated for each user. In particular, K is always negative because the chest is first decelerated, and then accelerated in one step. Since the orientation of the IMU is updated by using the Madgwick method [36] all the time, the acceleration here is described in the world frame where z axis is parallel to the gravity direction. This means that the integral of the accelerations with K in x axis and y axis corresponds to the moving length and direction. With Eq. 6, it can simultaneously be estimated the step length and direction from the accelerations without estimating the velocity to avoid the drift error.

b: MAP MATCHING

A particle filtering based map matching algorithm was used with a back tracking test [37]. The following components for multi-floor PDR were selected to constraint the movement on the map:

- *line* is used for the wall that can not be crossed.
- *zone_no_particle* represents the region where pedestrians cannot come into, and therefore the existing particles will be deleted, and new particles can not be generated.
- *zone_update_altitude* represents the region where the altitude can be changed such as stairs, escalators, and

¹<http://x-io.co.uk/ngimu/>

²<https://github.com/rairyuu/PDR-with-Map-Matching>

elevators so that the altitude will be updated according to the movement.

- *arrow* is used for explicitly describing the direction of the possible movement at *zone_update_altitude* such that *arrow_up* connects to the upper floor, *arrow_down* connects to the lower floor, and *arrow_both* connects to both floors.

A map editor was also implemented, whose input was the map images, and output was a set of files which contains the multi-floor building information. The users simply input points and connect them to create the map.

3) TUM TEAM

The high level architecture of TUM team system consists of seven components: 1) User's **Context Extraction**; 2) **Map**, which is responsible for mining the corresponding **Open Street Maps Model**; 3) **Pedometer**, that is responsible for detecting steps; 4) **Initial Direction**; 5) the **Direction** estimation; 6) **Particle Filter**, responsible for the fusion of the aforementioned components; and 7), the **Visualize Location**, that is responsible to visualize the estimated location (see Fig. 12).

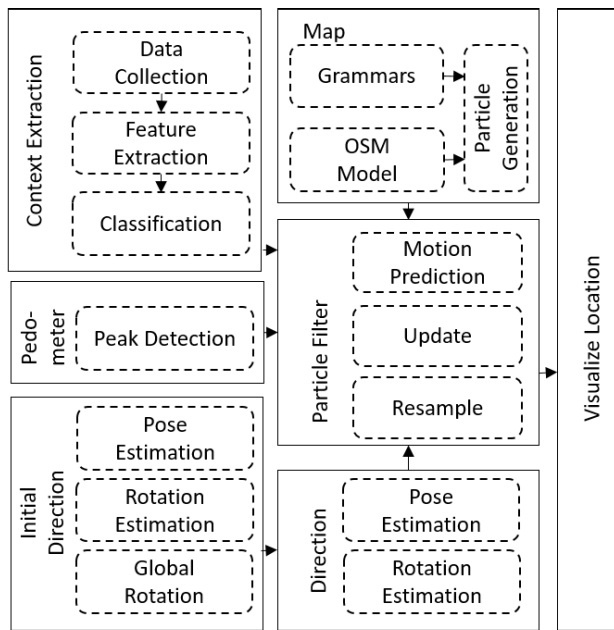


FIGURE 12. Localization module architecture.

Map is responsible for parsing the map and for identifying elements that belong to walkable areas, such as stairs, corridors or pathways.

Grammars enhance map elements using established standards, like based on standards regarding the minimum width of corridors.

Particle Generation generates a set of randomly positioned particles $S_t^k = [\mathbf{x}_j^k, w_j^k]$, where \mathbf{x}_j^k is the j^{th} particle at time k and w_j^k is the normalized weight of the particle, with

uniform prior distribution, as described by the Monte Carlo simulation.

Particle Filter. The proposed filter is used to model the probability density of the state vector $X_k = [x_k, y_k, \theta_k]^T$ at step k by N_p particles. According to [38]–[40] and assuming a first-order hidden Markov model, the posterior filtered density $p(x_k | \mathbf{z}_{0:k})$ is approximated by:

$$p(x_k | \mathbf{z}_{0:k}) \approx \sum_{i=1}^{N_p} w_k^{(i)} \delta(\mathbf{x}_k - \mathbf{x}_k^{(i)}), \quad (7)$$

where $\mathbf{z}_{0:k}$ defines the measurement vector for the time steps $0 \dots k$, $\delta(\cdot)$ stands for the Dirac distribution, $\mathbf{x}_k^{(j)}$ denotes particle state and $w_k^{(j)}$ denotes the normalized weight. The conditional probability is $P(S_t | z_t, S_{t-1}) = P(z_t | S_t, S_{t-1})$ where S_t and S_{t-1} are the current and previous state vectors respectively. z_t is the observation, which in the proposed case is $z_t = \min(S_{map} - S_t)$, where S_{map} is a vector of all points in the map.

Motion Prediction is an implementation of the dead reckoning process where the motions are modeled by:

$$\begin{bmatrix} x_k \\ y_k \\ \theta_k \end{bmatrix} = \begin{bmatrix} x_{k-1} + \rho \cdot \cos(\hat{\theta}_{k-1}) \\ y_{k-1} + \rho \cdot \sin(\hat{\theta}_{k-1}) \\ \hat{\theta}_{k-1} - \hat{\theta} \end{bmatrix} \quad (8)$$

where x_k, y_k and θ_k are the coordinates and direction at time k . x_{k-1} and y_{k-1} are the previous coordinates. ρ is the traveled distance and θ_k is the followed direction.

In the **Update** phase, each particle's weight is computed based on the assigned probabilities, a model that describes a set of restrictions and a motion predicted mechanism. Hence the weight of the i^{th} particle at time k , $w_k^{(i)}$ is defined by:

$$w_k^{(i)} = w_{k-1}^{(i)} p(x_k^{(i)} | \delta_k^{(i)}) X_k^{(i)} p(x_k^{(i)} | \theta_k^{(i)}) X_k^{(i)} p(x_k^{(i)} | \alpha_k^{(i)}) X_k^{(i)} \quad (9)$$

where $p(x_k^{(i)} | \delta_k^{(i)})$ describes the conditional probability of the i^{th} particle being at location X at time k given the nearest distance δ to the nearest corridor. $p(x_k^{(i)} | \theta_k^{(i)})$ describes the conditional probability of the particle being at location X , given its current heading direction θ . Finally, $p(x_k^{(i)} | \alpha_k^{(i)})$ is the conditional probability of the particle being at location X at time k given the current activity α .

Resample. For proper resample, two additive Gaussian noise models are used on top of the motion prediction mechanism, in order to compensate direction and step length uncertainty.

Initial Direction. In order to extract an initial direction, the phone's accelerometer and magnetometer are used to calculate the phone's pose and later the rotation matrix (roll, pitch and yaw angles).

Direction Estimation For the direction estimation, a low pass filter is first applied to remove human motion noise and then the angular velocity is computed. Positive or negative sign to the values is assigned to indicate whether there is a right or left turn respectively.

Step Detection. In the step detection module a peak detection module is applied, which detects peaks caused by the action when the heel strikes the ground.

Visualize Location. After calculating the new positions of the particles using the dead reckoning algorithm, weighted through a fusion with the map and the user context, the weighted average of the particles position is displayed as the final position to the user.

Context Extraction. This module is responsible for collecting data, filtering noise, segmenting sensor values, extracting features and for the classification of these values in a series of activities.

4) UPJS TEAM

The UPJS team approach focuses on indoor positioning using low-cost smartphones with built-in sensors. Floor plans are assumed to be available and no additional building infrastructure is required. A relative position is determined using Pedestrian Dead Reckoning (PDR). Bayesian filtering is introduced to deal with the uncertainty from the noisy sensor measurements. A step is detected from acceleration data, which triggers a computation of a new position estimation. The step heading is obtained from filtered values of the device orientation information. The positioning is performed on a single floor. If a floor change is detected using barometer measurements, the system is reset. In this case, a new initial estimation is set to the predefined location from a set of all possible transition platforms (e.g., elevators, stairs) in the building and previous location estimates.

Our main research focus is on the Bayesian filtering especially on grid-based methods [41]. Prediction and update are two stages of the filtering, where the prediction spread the probability density function according to the transition model and update stage decreases the uncertainty using measurements and observations. The grid-based filter approximates a continuous state space by a grid of regularly distributed isolated points. Values of conditional probability density function are computed only at these grid points. The method has high computational demands making it suitable for real-time indoor positioning only by assuming a low-dimensional system state. In this approach, every state is defined by a position in 2D space. The state transition is performed using the PDR with a fixed step length and the obtained step heading in addition with the noise model. The transition between two states represented by grid points is accomplished using a convolution with pre-computed convolution masks for various possible step lengths and directions. The update stage resets the belief value to zero for all grid points denoting inaccessible positions and movements, e.g., locations at obstacles, outside the map, motions through walls.

Walls and convex polygons composing accessible positions in the building are manually labeled in the floor plans. The map model is automatically generated and the floor plan is tessellated into a regular grid, where a point represents an area of $33 \times 33 \text{ cm}^2$ denoting a single grid cell with the belief value. The grid-based filtering approach is elaborated

and the positioning error introduced by discretization of the map is reduced using a centroidal grid approach. The same procedure is performed for the belief computation. However, the current position is not always represented by a center of a grid cell, but it is selected from the set of points in a finer grid according to the transition model. A single grid cell consists of 11×11 finer grid points.

The system proposed by UPJS team fuses PDR and map model using the grid-based Bayesian filtering. The analysis of the competition results show the applicability of such approach. However, even with the calibrated step length for the user, the main drawback of the solution is that the fixed step length causes the system to be less robust to different paces and walking styles in a realistic scenario.

C. TRACK 3: SMARTPHONE BASED POSITIONING CHALLENGE

1) ARARADS TEAM

AraraIPS is Arara's proprietary indoor positioning technology. Arara is engaged in developing advanced knowledge solutions and producing high-quality technology to address modern business and industry challenges. AraraIPS has been one of the central issues in Arara agenda for the last two years. It is a functional indoor positioning system on its way to become a commercial solution in the next months.

AraraDS team approach to indoor positioning has four distinctive characteristics: 1) it is based on a cartographic paradigm (fingerprinting); 2) it uses a discretization of the predicted floor/building, 3) it is measurement-agnostic (i.e. its abstract formulation is not specific to any kind of signal or measurement such as WiFi, magnetic field, BLE, etc.); and 4) it exploits measurement history. In the following paragraph it will be shown how AraraIPS works.

Fingerprinting has become a popular technique for indoor positioning. Traditional positioning methods are generally based on principles such as trilateration or triangulation, in which sufficient geometric information (with respect to reference landmarks) is used to compute the position of the object to be located. These methods are based on strong hypotheses that usually do not hold in the dynamic, cluttered context of indoor spaces, like the need of a clear line of sight between the object and the reference landmark to establish a functional one-to-one relation between the distance and the signal's intensity.

The system also relies on the discretization of the indoor space. In practice, this means that a graph is built from the map of a venue, in which nodes are possible locations where the tracked device can be found and edges connect neighboring nodes. This effectively turns the positioning problem into a classification one, in which the prediction is one of the finitely many possible locations. It has the further advantage of ruling out inaccessible locations (e.g. walls) and thus avoiding complicating the prediction task.

The final part of our system enriches the information available in the prediction module by including the measurements'

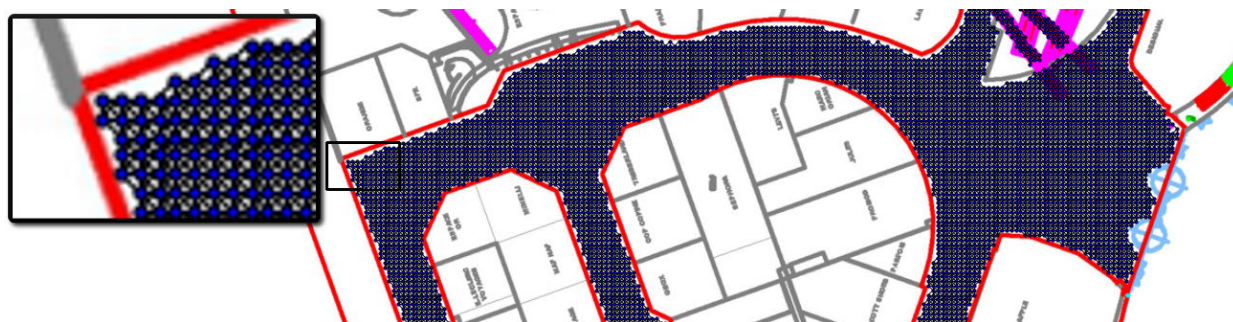


FIGURE 13. Sample graph on the competition scenario, each blue dot represents a graph node.

history, exploiting the fact that measurements closely related in time will be strongly correlated. Thus, it is expected the prediction to narrow in on the true position with a greater confidence as time goes by. The mathematical formulation of this idea is the use of a random walk on the graph of the venue, in which transition probabilities at a given epoch depend on the measurements at the same epoch. This dependence is made precise by the underlying measurement and node transition probabilistic models, which in the proposed system authors choose not to disclose.

2) MCLIPS TEAM

Team ‘mCLIPS’ adopted an empirical approach, only based on WiFi, for indoor positioning. In this approach, some important features of the received signal strength indicator (RSSI) vector are selected to exploit the similarity measure and index order of the access points (APs) in the RSSI list of a WiFi device [42]. The basic principle of the proposed approach is the following: instead of relying only on the RSS similarity measure, the system takes into account other features available in the RSSI list and their efficiency weight to identify candidate positions with high precision and robustness. The selected features have several dimensions. The K value and the $kRMSE$ parameter calculation are selected to control the diversity effects of WiFi environments [43]. To exploit the spatial distribution of candidate reference points around the ground truth, another parameter called centroid distance is used [44]. To control the effect of the diversity of different mobile devices, the entropy parameter is adopted from ranked based approach [45]. In addition, these features are combined to compensate complementary weaknesses. As a result, the algorithm of the proposed fingerprint matching approach is more efficient and robust than algorithms already available in the literature for fingerprinting purposes. To find the best match among multiple candidate fingerprint locations with a minimum error distance, the proposed algorithm along with conventional RSSI similarity calculation in fingerprint matching process also calculates the order difference of the APs in RSSI list with respect to the signal strength at a particular reference point (RP). The following sections describe the steps of the proposed technique.

- The first step is the selection of K . K selection applies to the WiFi infrastructure present in the environment and is directly proportional to the good APs in the environment. According to the Good AP definition in [46], APs with consistency in presence at particular reference points are of great importance compared to others that disappear in consecutive scans. Eq. 10 and Eq. 11 describe the selection of K .

$$K_{RP_i} = \frac{G_{RP_i}}{T_{RP_i}} \tag{10}$$

$$K = K_{RSSIList} \cdot (\text{Mean}(K_{RP_1}, K_{RP_2}, \dots, K_{RP_N}) + C) \tag{11}$$

G_{RP_i} and T_{RP_i} are Good AP count and Total AP count to each cell of the fingerprinting DB, respectively. $K_{RSSIList}$ is the total AP count in a particular RSSV. The variable C is the standard deviation.

- From an empirical point of view, it has been observed that the existence of RP corresponding to the ground truth is high among the RP candidates having a high number of AP matches. Therefore, the maximum match count (MMC) of APs relative to the number of neighbors is an important measure used to avoid outliers that have a high correlation but a lower value for the number of neighbors.
- The root means square error (RMSE) is one of the important parameters that plays a key role in the similarity calculation of fingerprints. Experimentation shows that in indoor radio environments, some areas lead to the selection of outliers with low RMSE values due to a strong correlation between some access points with low RSSI values. Therefore, to prioritize the candidate locations having a higher number of AP mappings, a $kRMSE$ of candidate location is calculated that includes an additional division with the number of APs compared (i.e. MMC) to RMSE calculation.
- Another important parameter for filtering the estimated positions is the distance from the center of gravity [47]. After computing $kRMSE$ of each candidate, the average location of the top ordered N RPs relative to the minimum $kRMSE$ value is selected as centroid point. In the proposed algorithm, the position of the centroid

is calculated by taking an average of the coordinate values (X, Y) of each selected candidate position. The Euclidean distance of a candidate RP from the calculated centroid is called the centroid distance. This distance from the centroid is used to define the RP priorities that are closer to the centroid point.

- Next, the entropy error is another important measure after $kRMSE$ to estimate the similarities of each candidate location RSSI list in the database against the RSSI list received online. The proposed algorithm calculates Δ_{vji} for each corresponding AP in both RSSI lists, first by sorting the two RSSI lists relative to the RSSI level, then measuring the difference of AP index in both lists (Eq. 12). In addition, the order difference of an AP with a stronger RSSI is minimized by multiplying it by the RSSI level ($RSSI_{vji}$) divided by -100. Empirical results show that the position accuracy performance of the proposed entropy parameter outperforms the ranked based approach [45]. Therefore, entropy helps in limiting the strong candidates around the ground truth by calculating the order difference of each AP with respect to its signal strength.

$$\Delta_{vji} = \left| (I_{vji} - I_{cji}) \cdot \frac{RSSI_{vji}}{-100} \right| \quad (12)$$

$$Entropy = \frac{\sum^k \Delta_{vji}}{k^2} \text{ where } k \leq K \quad (13)$$

where I_{vji} and I_{cji} are indices of matched APs in online and candidate RSSI list from DB, respectively.

- Finally, the FACT calculation is performed to select the final candidate location. FACT calculation begins with the normalization of the parameter values of each selected candidate. Then the FACT is calculated as a product of $kRMSE$ with the sum of *Entropy* and D_{ctr} , as detailed in Eq. 14. The candidate RP with the least value of FACT is selected as the final position estimated by the proposed algorithm.

$$FACT = \widehat{kRMSE} \cdot (\widehat{Entropy} + \widehat{D}_{ctr}) \quad (14)$$

3) EGEN TEAM

The algorithm used by EGEN Team is based on PDR and map matching. WiFi RSSI information and magnetic field strength information are also used to build the fingerprint databases, to provide the initial position and improve the algorithm's precision and stability. The sensor information used in this algorithm includes the inertial measurements (accelerometer and gyroscope), WiFi RSSI, magnetic field strength and air pressure. In particular, the map information provided by the competition organizers is fully utilized in the map matching algorithm to correct the pedestrian's position and direction. Figure 14 shows the technical route of the algorithm.

a: PEDESTRIAN DEAD RECKONING (PDR)

The PDR algorithm (Fig. 15) mainly uses mobile phone sensors like accelerometers, gyroscopes and magnetometers to

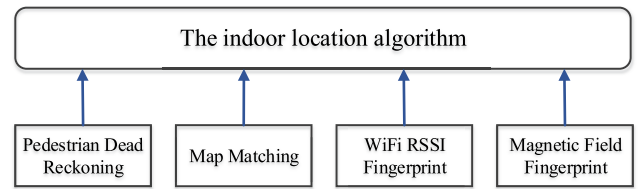


FIGURE 14. The technical route of the algorithm.

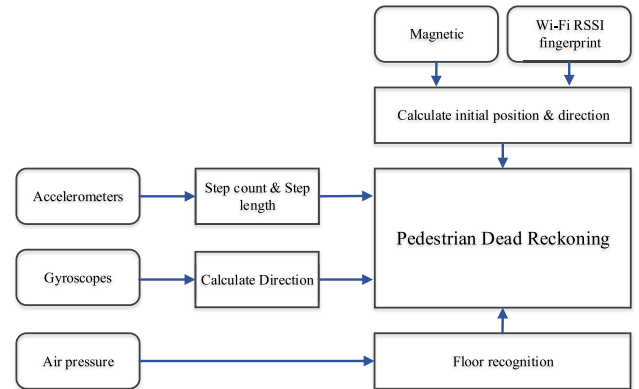


FIGURE 15. The PDR algorithm for calculating the pedestrian walking trajectory and position.

estimate pedestrian's step number, step length and direction, and then calculates the pedestrian walking trajectory and position. The initial position used in the PDR algorithm is given by WiFi RSSI fingerprint. The air pressure is also used for the floor switching.

The PDR algorithm contains a step detection, a step length estimation and a direction estimation algorithms. Compared to traditional PDR algorithms, it uses an optimized physiological model of pedestrian gait, which is more adaptable and stable for pedestrian step detection and step length estimation.

b: MAP MATCHING

PDR algorithm is affected by cumulative errors, which may result in locating the pedestrian outside of the indoor road network with large calculation errors. In that case, a map matching algorithm is used to match the current pedestrian location with the indoor GIS maps provided by the competition's organizers.

The map matching algorithm used in this manuscript is the optimized ST-matching algorithm, that fuses the indoor road network location, direction and pedestrian speed. It fully utilizes the map information and is more suitable for the indoor positioning and navigation.

c: FINGERPRINT MATCHING ALGORITHM

The algorithm uses also WiFi RSSI, magnetic field strength to build WiFi and magnetic fingerprints. They are used to provide the initial position and correct the pedestrian's direction and position estimation errors. The WiFi fingerprint matching algorithm is the cosine similarity algorithm. The geomagnetic

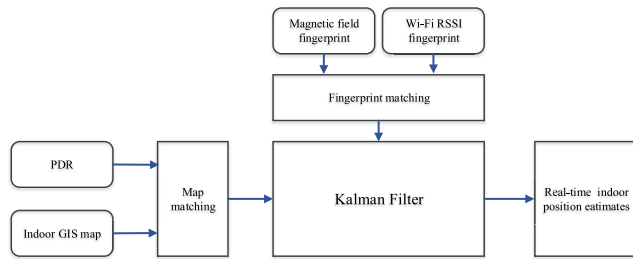


FIGURE 16. The Kalman filter is designed to combine different calculation results of these algorithms.

fingerprint matching algorithm is the contour matching algorithm. These matching algorithms can significantly improve the accuracy and reliability of the solution.

d: THE FUSION FILTER

A Kalman filter combines the different algorithms’ estimates and provides real-time, accurate and stable indoor positioning results, as shown in Fig. 16.

4) HFTS TEAM

The HFTS algorithm used in the 2018 competition is based on WiFi and pedestrian dead reckoning (PDR), and a particle filter (PF) (Fig. 17). It is an evolution of the algorithm deployed at the 2016 competition [48] and the 2017 Competition [49].

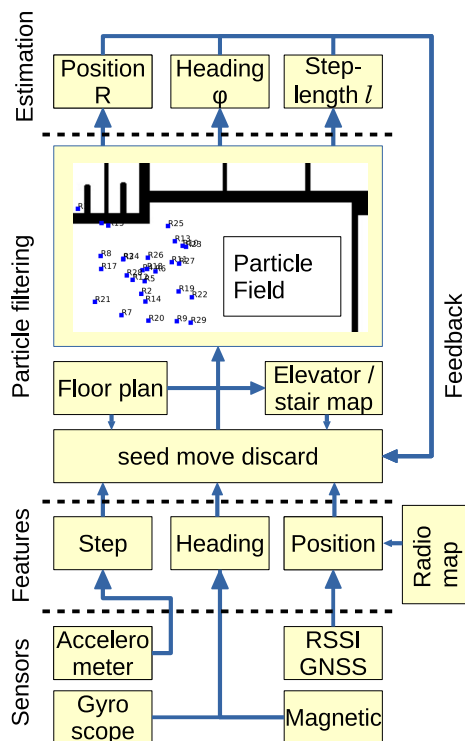


FIGURE 17. Scheme of the HFTS PDR/WiFi/PF algorithm.

For the dead reckoning, heading estimation is performed using compass and gyroscope data. The gyroscope is able to

detect heading changes quite accurately on a short timescale, but will drift in the long-term. In contrast, compass heading is subject to strong local magnetic perturbations but shows no drift on a long-term scale. Therefore, gyroscope data is used to detect immediate heading changes. The heading relaxes to the compass direction with a certain time constant of some seconds. Step detection is performed by peak detection of the accelerometer data.

WiFi positioning is performed using the scalar product correlation fingerprinting algorithm [50] which is based on $k - nm$ and the cosine similarity. Prior to the estimation of the unknown competition track, a radio map is obtained by evaluating the reference data provided by the competition organizers. These data are enriched with true ground positions and RSS readings. Therefore obtained RSS vectors can be related to a position. As the true ground readings occur only rarely, the actual reference position between two reference points is interpolated by PDR.

The actual positioning process comprises 2 phases. In the first phase RSS positioning is performed with the radio map. RSS readings are obtained at a rate of one reading every 4 seconds. For each reading a position is estimated. The floor is also estimated by RSS. If the actor is moving, the position will change considerably within the 4 seconds between two RSS readings. Therefore, the position between the two readings is interpolated using PDR. The heading offset and the actual step length are not known at this stage. However, since the RSS position estimates exist for the start- and the endpoint of the 4 second period, the step length and heading offset are adjusted such that the track connects the two points.

In the second phase, positioning is performed employing PDR and a particle filter. Step length estimation and heading error- and drift compensation are performed by the particle filter using the information of floor plans to detect the most likely path (see also [51], [52]). The particle filter contains a constant number of particles. Besides the position, a particle state also comprises individual step length and heading offset values. The filter is updated each time a step is detected. All particles are moved according to the estimated heading, individually modified by the particle specific offsets. Resampling is performed as follows: particles who collide with, for example, a wall, are replaced by new ones. For collision detection, the provided floor plans are used. New particles are seeded at the position of an existing particle, but with randomized step length and heading offset value. The global heading and step length are recalculated by averaging the heading values and step length of all particles. The reported PDR position is the averaged position of all particles.

Depending on the building layout (e.g. open spaces, corridors, room sizes, etc.), the PF results alone may not be sufficient for absolute position determination. Therefore, the step length and heading are also adjusted by the obtained WiFi position from phase 1: After each step the longitudinal- and the lateral displacement between WiFi and PF position are evaluated and a configurable fraction of the displacement is added to the movement vector.

It is planned to further improve the algorithm by also considering magnetic fingerprinting.

5) TUM TEAM

The system proposed by TUM team, Ariadn, can be divided into two main modules. The first module is responsible for the localization and its functionality is embedded in a smartphone; and the second module is responsible for detecting and localizing landmarks and keeping up-to-date a classifier that enables “on the fly” localization.

a: THE LOCALIZATION MODULE

The localization module is responsible for localizing the user following a modified particle filter approach. The main components of this module, presented in Fig. 18, are now described.

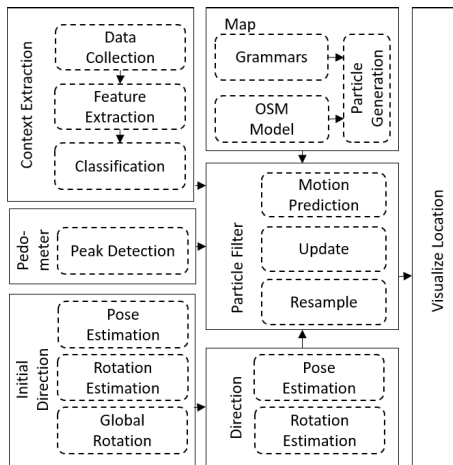


FIGURE 18. Localization Module Architecture.

OSM Model. Existing information from Open Street Maps is imported to enable the generation of particles.

Grammars. They are heuristics following standards that help to create a finer geometry. They are necessary due to the OSM limited information and they are inspired by [53].

Particle Generation. In this module, the newly constructed map is restructured as a set of randomly generated particles, with uniform prior distribution, which follows the Monte Carlo simulation description.

Initial Direction. The initial direction is estimated following an opportunistic approach, based on the users context (i.e. “user transit indoors”, “user is ascending stairs”, etc.). When this is not possible, the direction is extracted from the compass after the phone pose (i.e. on hand, in pocket etc.) has been extracted.

Step Counter. In the step counter module, the current number of steps is estimated based on the repetitive pattern caused in the accelerometer from the human bipedal movement.

Localization. Ariadne provides horizontal and vertical localization, where the horizontal localization is based on

Dead Reckoning, while the vertical is based on the barometric formula.

Quantify Confidence. In every unit of time new particles are generated, weighted based on the probability of being the target’s true location. Their weights are quantified based on map restrictions or model predictions.

Visualize Location. Finally, the particle with the highest probability is visualized as the real location.

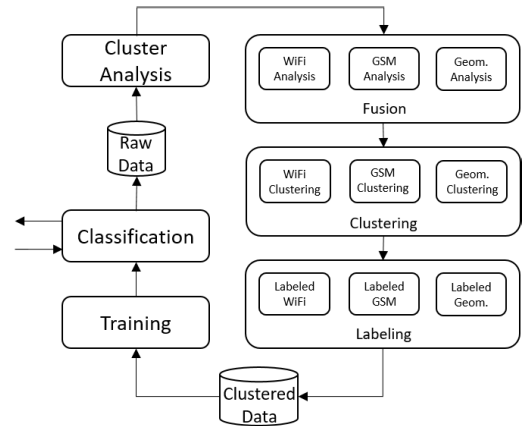


FIGURE 19. Landmark Selection Architecture.

b: THE LANDMARK SELECTION MODULE

The Landmark Selection module (Fig. 19) is responsible for extracting landmarks from raw sensor data that have been extracted while the user was localized from the localization module and for localizing the user once a model is available. Its components are:

Classification. In this module sensed values from WiFi, geomagnetic and GSM sensors are imported to a support vector machine classifier responsible for predicting the location of the client.

Raw Data. The raw streamed sensor values are then labeled based on their spatial coordinates, estimated from the localization module, and are stored in a database.

Cluster Analysis. A cluster analysis is performed on the collected data and the optimum number of clusters is been estimated.

Fusion. Once the number of clusters has been identified, weights are assigned to the clustered values and the data are aggregated based on their proximity.

Clustering. Once the data are aggregated, they are clustered based on their characteristics, forming rectangular shapes whose edges are tangent to the walls in the map.

Labeling. The new created clusters are now labeled based on coordinates of the rectangular that they include. The size of the rectangular, in the localization phase, will indicate the localization confidence.

Clustered. The clustered and labeled data are now stored in a database.

Training. Once there are enough data and with a regular interval, a classifier is trained on them and more precise localization is enabled.

6) UGENT TEAM

The core of UGENT team location tracking system is a route mapping filter [54] that is based on a motion model and the Viterbi principle, a technique related to Hidden Markov Models and backward belief propagation. The physical layout of a building is used to construct the most likely path instead of a sequence of independent, instantaneous estimates. This post-processing filter ensures physically realistic trajectories and has been shown by independent researchers to outperform traditional approaches such as smoothing particle filters [55]. During the initialization, the route mapping filter starts with N paths (e.g., 1000 starting points) that are located in a circle around the best first estimation given the first WiFi measurements and a fingerprint map based on the training data [54]. These N paths are updated each time new WiFi measurements become available. The next candidate positions, starting from the current last points of the paths in memory, are determined based on a maximum walking speed (derived from a step counting algorithm using the available accelerometer data), and the walls and obstacles of the building (people cannot move through walls). Each path consists of a chain of grid points and a cost that indicates the probability of this path at this time step. The path with the lowest cost after processing all sensor data is the most likely trajectory. The cost of a path is the sum of costs based on various sensor measurements: WiFi RSS measurements, barometer, accelerometer and gyroscope data:

WiFi. The RSS values are compared to the corresponding reference values in a fingerprint map and are weighed based on the estimated distance to the WiFi access points. The fingerprint map itself is based on all training data, grouped per BSSID and per grid point. Missing grid points in the fingerprint map are filled in based on interpolation of neighboring grid points (that do have measurements), with a certain upper limit, e.g., 5m.

Barometer. The differences between the average pressure over a short (5 seconds) and a long window (30 seconds) are used to detect up or down floor changes when the difference exceeds a certain threshold based on the training data. Furthermore, a cooling-off period is implemented to avoid changing floors multiple times within a short time span. Paths that do not change their current floor in the right direction (by taking the escalator or elevator) get an additional cost assigned. By default, this additional cost is set to the floor height or floor penalty (15 m).

Accelerometer, gyroscope, and mobile phone 3D orientation. These data are fused together and used to detect the step count, stride length and orientation between two locations updates; combination of these three gives the traveled distance and direction. The difference between this traveled distance and direction, and the distance and direction between a grid point and its parent grid point (i.e., the previous grid point of the path) are used as an additional cost. This penalizes paths that move when the accelerometer and gyroscope estimate that the user is standing still; and also paths that remain

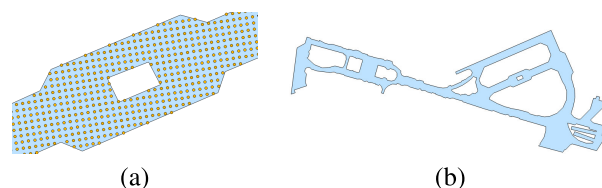


FIGURE 20. Floor plan modeled as polygon with details of the grid.

static when the user is moving; or paths that take a turn in the opposite direction.

The physical layout of the building is modeled by a shapefile, constructed with QGIS, the PDF maps with georeferenced points, and a plugin to reference the raster to the projected coordinate system by creating a GeoTIFF file. Each floor is represented by a polygon with the floor id as a feature value and likewise, the escalator and elevator are represented by a polygon with the start and end floor as a feature value (Fig. 20(b)). The route mapping filter uses this shapefile as input to construct a grid database with a certain grid size, e.g., 1 m, and a reachable database, consisting of the reachable grid points, for each grid point (Fig. 20(a)). The reachable grid points are the neighboring grid points that do not cross walls or obstacles, and the above or below grid points if they are located within the polygon of an escalator or elevator (and correct floor level). This grid and reachable database are used to select the next candidate positions in the route mapping filter, given the current last points of the paths in memory and the time that has passed since the last location update.

7) WHU TEAM

The method used by Wuhan University team utilizes data of many sensors available in a smartphone. The main method combines PDR, Wi-Fi fingerprinting and magnetic matching.

The PDR algorithm processes accelerometer, compass, gyroscope and barometer data. Similarly to PDR algorithm, compass and gyroscope signals are used to estimate heading and accelerometer signal is used for step detection. In contrast to traditional PDR, barometer data is used as an important source for the altitude estimation to detect much more precisely the floor.

Since the competition organizers have provided a training set, the team took full advantage of the WiFi signals to construct a fingerprinting database. WiFi fingerprinting method is an attractive indoor positioning method but the training data was limited. That is the reason why magnetic information was fully used. It is important to note that the geomagnetic sequence and fluctuations are often similar when people pass through the same path. These anomalies are, therefore, highly reliable. The position of the reference was used to control the position drift error of the inertial navigation system.

8) YAI TEAM

YAI team fingerprinting method first leverages the three-axis accelerometer to build trusted known points associated

with APP time. Next, the team uses WiFi received signal to reconstruct the WiFi fingerprints. Finally, the system compares both, the Euclidean distance and the similarity of the received WiFi behavior metrics to compute the final localization results.

a: STEP DETECTION

The training dataset gives the coordinates (longitude and latitude) of some known points, i.e. POSI, but these POSI points are sparse in the space domain. To build a WiFi fingerprint, coordinates of many other points than the known POSI points have to be estimated. Therefore, first, the system assumes that the walking path between two consecutive POSI points follows a straight line. Then, the sensed data of the three-axis accelerometer is used to estimate the number of steps between two known POSI positions. This can be done by finding the local maximum points of the magnitude of the output of a three-axis accelerometer between two POSI points. The magnitude can be expressed as:

$$\hat{M}_i = M_i - E \{M_i\} \tag{15}$$

where $M_i = \sqrt{x_i^2 + y_i^2 + z_i^2}$; x_i , y_i , and z_i are the values of a three-axis accelerometer at epoch i . The symbol $E \{ \cdot \}$ denotes the averaged operation. Lastly, we use inter- and intra-polation to estimate the locations of the interpolated points between two POSI points. At this stage, we have a table which lists 4-tuple for each record: (*APP Time, Longitude, Latitude, Floor Number*).

b: GENERATION OF THE FINGERPRINTING TABLE

Next, the received RSS values from each access point (AP) are associated with the 4-tuple table. Note that the APP time of receiving the RSS values is not synchronized to the 4-tuple table. However, over short time duration, the location of a walking man should be pretty similar. Thus, the location with the closest APP time is chosen to generate the fingerprinting table.

c: POSITIONING METHOD

The positioning method simply consists in comparing a N -tuple received RSS values with the WiFi fingerprinting table. In addition, a metric called ‘‘Similarity of the WiFi receiving behavior (S value)’’ is defined. It is used to measure the distance of the N -tuple received RSS values with the records in the WiFi fingerprinting table. Since the received RSS values with each AP are not stable, it is better not to compare all the entries of the fingerprinting table with the N -tuple received RSS values. Instead, the entries of the fingerprinting table, which have the highest S value, are compared with the N -tuple received RSS values. The two proposed ‘‘similarity of the WiFi receiving behavior metrics’’, S_1 and S_2 , are:

$$S_{1_i} := \sum_j \text{sgn}(x_j) \cdot \text{sgn}(y_{ij}) \tag{16}$$

$$S_{2_i} := \sum_j I(\text{sgn}(x_j), \text{sgn}(y_{ij})) \tag{17}$$

where x_j denotes the j -th entry of the received N -tuple; y_{ij} denotes the j -th entry of the i -th record in the fingerprinting table. $\text{sgn}(\cdot)$ is a sign function defined as follows:

$$\text{sgn}(x) := \begin{cases} 0 & \text{if } x \geq 0 \\ -1 & \text{otherwise} \end{cases} \tag{18}$$

and $I(\cdot, \cdot)$ is an indication function defined as follows:

$$I(x, y) := \begin{cases} 1 & \text{if } x = y \\ 0 & \text{otherwise} \end{cases} \tag{19}$$

Finally, the Euclidean distance is calculated between the N -tuple and the records in the fingerprinting table which has the largest first two S values and the location of the N -tuple with the smallest Euclidean distance is obtained. It is important to note that, in general, S_1 is used as the similarity of the WiFi receiving behavior metric. However, when the sparsity of the N -tuple is high, S_2 is adopted as the similarity of the WiFi receiving behavior metric instead.

D. TRACK 4: FOOT-MOUNTED IMU AND GNSS BASED CHALLENGE

1) AOE TEAM

The system proposed by AOE team is a human foot-mounted PDR. Fig. 21 gives an overview of the solution comprising three different modules.

The bottom module is an IMU device with four sensors: an accelerometer for measuring acceleration a_{t+1}^b , a gyroscope for measuring angular rate ω_{t+1}^b , a magnetometer for measuring magnetic field of the Earth o_{t+1}^b , and a barometer for measuring barometric pressure of the Earth, with which the person’s altitude, h_{t+1} , can be calculated.

The middle module includes five components: the Stance & Still Phase Detection, the HDR, the ZUPT, the ZARU, and the Earth Magnetic Yaw. Meanwhile, the Stance & Still Phase Detection includes two components. The GLRT detector algorithm is used under slow and normal pedestrian gait speed condition and the HMM detector algorithm is used under high dynamic and fast pedestrian gait speed condition, such as fast walking. When the Stance & Still Phase Detection detects the stance and swing phases of human foot gait from IMU’s data, the HDR, the ZUPT, the ZARU, and the Earth Magnetic Yaw utilize these data to estimate the error vector $m_{t+1}(\delta\psi_{t+1}, \delta\omega_{t+1}^b, \delta v_{t+1})$ (Fig. 21), where $\delta\psi_{t+1}$, $\delta\omega_{t+1}^b$ and δv_{t+1} denote the bias error of yaw, the bias error of angular rate and the bias error of velocity at time $t+1$, respectively. $m_{t+1}(\delta\psi_{t+1}, \delta\omega_{t+1}^b, \delta v_{t+1})$ is the most important input data for successfully bounding errors in the EKF algorithm. Since the EKF mechanization part processes dynamic data that are related to position, velocity, and attitude, it relies on the Stance & Still Phase Detection to apply the HDR, the ZUPT, the ZARU and the Earth Magnetic Yaw updates.

The top module includes an INS and an EKF. The INS system alone can’t cope with the IMU drift. The EKF, along with a properly constructed sensor fusion scheme, can however estimate the IMU biases. Therefore, it can help the INS in reducing the IMU drift. To mitigate possible gross

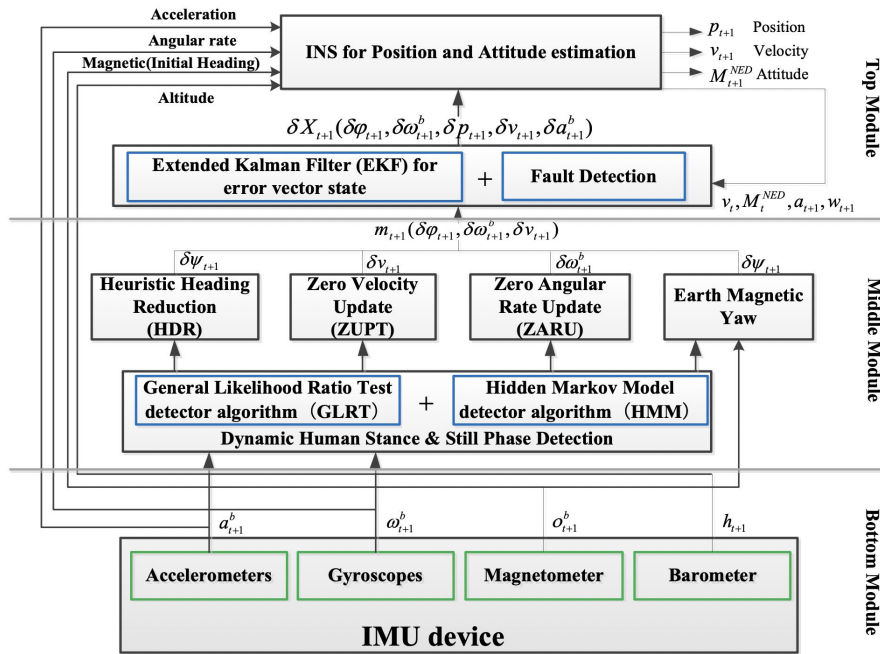


FIGURE 21. The Scheme of IMU/EKF+HMM+ZUPT+ZARU+HDR+Compass algorithm.

errors in the measurements, a fault detection method based on the innovation vector is adopted. It can effectively detect and remove the gross errors to ensure that only accurate measurements are fused.

a: EXPERIMENTAL EVALUATION

In this section, the proposed algorithm is implemented in the indoor experiment, in order to evaluate the accuracy of the position estimation of the foot-mounted PDR system. One of the experimental data result is shown in Fig. 22. The errors in the horizontal plane for the three groups of test data are detailed in Table 2.

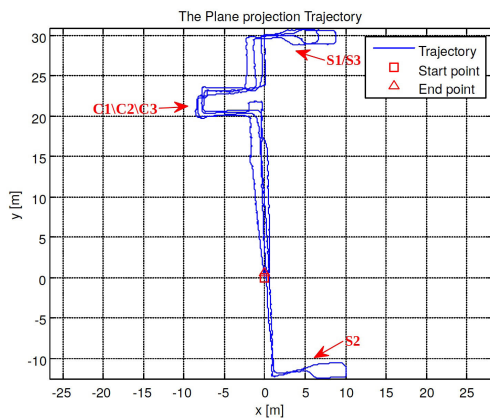


FIGURE 22. Route line Plane projection.

AOE algorithm has been tested in the real indoor environment. The experiment shows that the algorithm can effectively eliminate the error accumulation of the IMU device, with a high accuracy.

TABLE 2. Route line plane error assessment results.

Point No.	Point 2	Point 5	Point 6	Point 9	Point 10	Point 13	Closed error	Error length
Plane error 1 (m)	0.160	0.248	0.452	0.483	0.576	0.616	0.672	0.217%
Plane error 2 (m)	0.301	0.410	0.603	0.688	0.797	0.759	1.084	0.350%
Plane error 3 (m)	0.182	0.205	0.324	0.342	0.451	0.502	0.643	0.207%

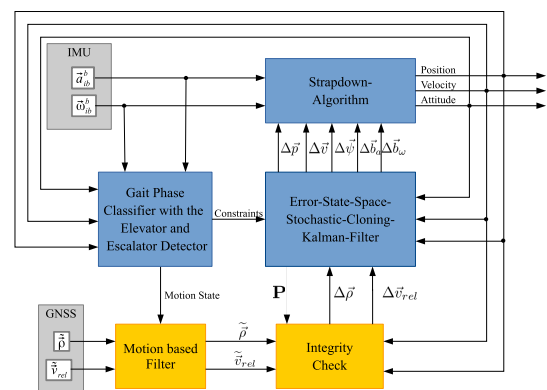


FIGURE 23. Concept of the INS/GNSS data fusion. The different parts of the INS are colored in blue and the augmentation of GNSS data is colored in yellow.

2) KIT TEAM

In Fig. 23 an overview of KIT team tightly-coupled INS/GNSS sensor data fusion approach is illustrated. The current position, velocity and attitude are propagated with a strapdown-algorithm considering the specific force and

gyroscope measurements. The measured inertial signals are corrected with estimated sensor bias values. Zero-Velocity-Updates (ZUPTs) are generated in the detected midstance phases of the foot by a finite state machine based gait phase classifier [56]–[58]. In contrast, horizontal ZUPTs and delta ZUPTs are applied during stance phases using an elevator. Absolute velocity measurements are generated during stance phases on an escalator [59]. If GNSS pseudo-range and Doppler measurements are available, the kind of aiding depends on the current classified motion state. To enable accurate position estimation in urban scenarios, an integrity check of the received GNSS data is essential [60]. Based on the described measurements, corrections of the navigation solution and the bias values of the inertial sensors are calculated by the Error-State-Stochastic-Kalman-Filter.

a: GAIT PHASE CLASSIFIER

The proposed finite state machine based motion classifier method is founded on biomechanical knowledge and medical research findings of the human gait. Because the foot module is solely mounted on one foot, it is appropriate to model four basic motion states for forward motion, as shown in Fig. 24 and described in detail in [57]. The transitions and states representing backwards motion and the detection of walking and running are explained in [58].

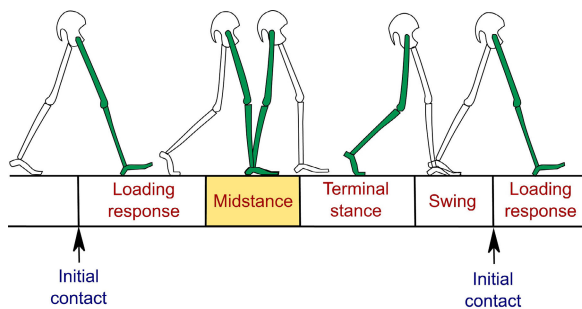


FIGURE 24. Compact subdivision of the human gait of the motion classifier during one step forward in four different motion states: Loading response, Midstance, Terminal stance and Swing [58].

b: ELEVATOR AND ESCALATOR DETECTOR

KIT team approach is able to detect and separate elevator from escalator movements [59]. In addition, the elevator and escalator rides are subdivided in different sub-states like acceleration phase, constant velocity phase and braking phase. The elevator and escalator detector is realized with two separate finite state machines; one for the recognition of elevators and the second for the detection of escalators. The finite state machines have different states and transitions to switch between the states.

c: GNSS AUGMENTATION

A tightly-coupled INS/GNSS integration is used for the pedestrian navigation system. The precise relative positioning INS is fused with GNSS pseudo-range and Doppler

measurements for absolute position and heading estimation. Unique is the decision depending on the classified motion state if Doppler measurements improve the accuracy of the navigation solution. In addition, the integrity of the GNSS signals are checked. The good knowledge of the system precise relative positioning inertial system is used to detect and exclude GNSS measurements with high multipath errors. This is essential for robust pedestrian localization in dense urban environments with outdoor-indoor transitions.

3) WHU TEAM

In the last several years, WHU team has been working on developing an accurate and reliable pedestrian navigation system (PNS), which will significantly increase the safety of military personnel and first responders.

The data sources used in WHU solution are IMU data and GNSS raw data. Magnetometer is not included due to its vulnerability to disturbance (especially indoors). The basic navigation algorithm adopted is quite simple and commonly consists of INS mechanization, zero-velocity detector, and a complementary Kalman filter (KF), as shown in Fig. 25.

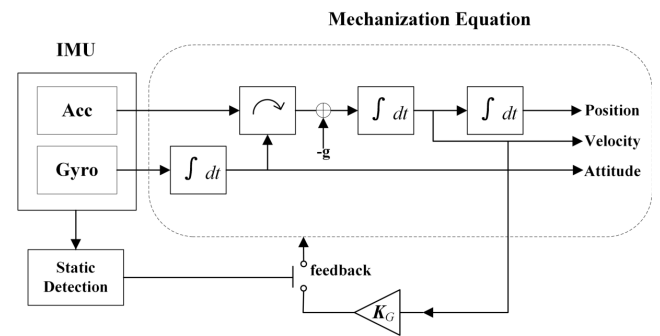


FIGURE 25. Block diagram of the basic navigation algorithm.

The Foot-Mounted INS signals are integrated with GNSS signals in a loosely-coupled manner. To get rid of gross error as much as possible, satellites with small elevation should be discarded. Some measurements with poor quality based on the magnitude and covariance of the innovation vector can also be rejected. Even though the heading is not observable when a GNSS signal is not available, heuristic methods like zero integrated heading rate are adopted because it is not reliable and accurate enough for a statistical grade or better IMU.

The height precision should be sufficient to distinguish between different floors. Some constraints, employed effectively, mitigate the error drift along the vertical channel in the absence of barometer. When walking up and down stairs, the slope can be seen as constant in most cases. So the system is able to define a slope from every footstep, as shown in Fig. 26. In this way, the slopes that are already in the buffer can be used to constraint the current slope, as well as updating the slope buffer with this newest slope.

Another extreme case is the escalator. Normally escalator moves with constant speed, which means that nearly all the acceleration input comes from local gravity when users stay

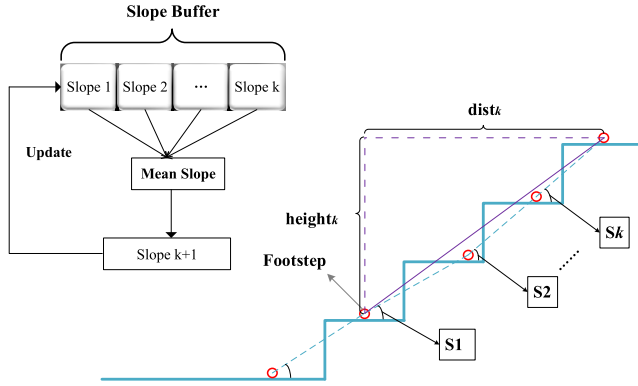


FIGURE 26. Diagram of the slope definition from every footstep.

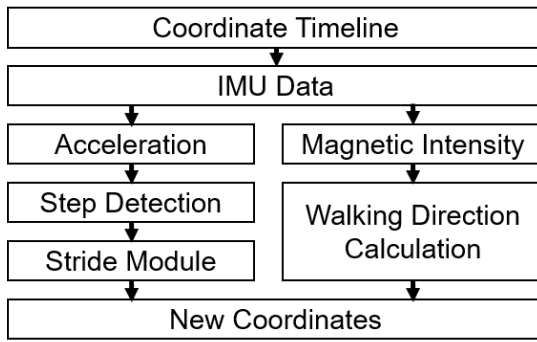


FIGURE 27. Flow chart of the moving trajectory estimation algorithm.

relatively static on the escalator. The gravity information can be fused in a tightly coupled manner, the measurement equation can be defined in error form as:

$$\partial \mathbf{f}^n = [\mathbf{g}^n \times] \phi + w \quad (20)$$

By using this gravity information, the drifting error part can be controlled even when moving on the escalator. The only thing, that needs to be done, is to compare the magnitude of the specific force with the one of the local gravity before proceeding with the update to determine the availability of the measurement. Thanks to this approach, the tricky issue of escalator recognition can be circumvented and still obtain a good position's estimate on escalator.

4) YAI TEAM

The system proposed by YAI team is shown in Fig. 27. The positioning algorithm includes three steps: step detection, stride and walking-direction estimation.

The first two steps utilize accelerometers and the last two steps exploit the data from the horizontal-axis component of the accelerometers and the magnetometers. In addition, outlier samples observed in the accelerometers are ensure a smooth and stable walking-step estimation. Multivariable linear regression techniques were used to estimate the stride for each step. The detailed operation of the proposed moving trajectory estimation algorithm is now described

a: ACCELERATION DECOMPOSITION

By averaging the accelerometer values, an averaged \mathbf{g} -vector can be obtained over the past few seconds, which can be expressed by:

$$\mathbf{g}_0 = \frac{1}{N} \left(\sum_{i=t-N+1}^t g_{i,x}, \sum_{i=t-N+1}^t g_{i,y}, \sum_{i=t-N+1}^t g_{i,z} \right) \quad (21)$$

where \mathbf{g}_0 represents a unit vector along the vertical direction. \mathbf{g}_i is the i -th reading of the \mathbf{g} -sensor; N is the number of readings in the window. This can be generalized by the concept of low pass filtering. The vertical component of the \mathbf{g} -vector can be formulated as follows:

$$\mathbf{g}_i^\perp = (\mathbf{g}_i \cdot \mathbf{g}_0) \mathbf{g}_0 \quad (22)$$

Also, the vertical component of \mathbf{g}_i can be expressed by

$$g_i^\perp = (\mathbf{g}_i \cdot \mathbf{g}_0) \quad (23)$$

The horizontal component of the \mathbf{g} -vector becomes

$$\mathbf{g}_i^\parallel = \mathbf{g}_i - \mathbf{g}_i^\perp \quad (24)$$

Note that \mathbf{g}_i^\parallel is distributed in a 2D space.

b: STRIDE MODULE

Next, we calculate the step's distance using multi-variable linear regression equation for each step with:

$$D(\Delta A, X_1) = C_0 + C_1 \Delta A + C_2 X_1 \quad (25)$$

where $\Delta A = \Delta A_1 + \Delta A_2$; ΔA_1 and ΔA_2 are the difference between the left peak-valley pair and right peak-valley pair, respectively; C_0 , C_1 and C_2 are parameter; X_1 is the first component of DFT of g_i^\perp in the period.

c: WALKING DIRECTION CALCULATION

Finally, the orientation of the STIM300 and HMC5983 are used to calculate the horizontal component of \mathbf{m} -vector, which can be expressed as follows:

$$\mathbf{m}_i^\parallel = \mathbf{m}_i - (\mathbf{m}_i \cdot \mathbf{g}_0) \mathbf{g}_0 \quad (26)$$

where \mathbf{m}_i represents the i -th reading of the \mathbf{m} -sensor. By calculating the horizontal component of $\mathbf{e}_z = (0, 0, 1)$, we obtain:

$$\mathbf{e}_z^\parallel = \mathbf{e}_z - (\mathbf{e}_z \cdot \mathbf{g}_0) \mathbf{g}_0 \quad (27)$$

The angle between the smartphone orientation and the north is obtained by combining \mathbf{m}_i^\parallel and \mathbf{e}_z^\parallel as follows:

$$\cos^{-1} \left(\frac{\mathbf{m}_i^\parallel \cdot \mathbf{e}_z^\parallel}{\|\mathbf{m}_i^\parallel\| \|\mathbf{e}_z^\parallel\|} \right) \quad (28)$$

If $(\mathbf{m}_i^\parallel \times \mathbf{e}_z^\parallel) \cdot \mathbf{g}_0 \leq 0$, walking direction is toward east, otherwise, toward west. The holding angle is figured out by using horizontal acceleration vectors. The horizontal acceleration is composed of forward vector, backward vector and lateral vector. Walking causes great acceleration in forward

and backward directions, and small acceleration in lateral. By accumulating the horizontal acceleration vectors, the lateral vectors can be compensated and remains only the forward and backward vectors.

V. COMPETITION RESULTS

This section presents the practical course of the competition for the four tracks and an analysis of results achieved by the teams who participated in the competition.

A. PRACTICAL COURSE OF THE COMPETITION

For the on-site tracks, the teams were allowed to survey the evaluation area during the calibration day (Friday, September 21st, 2018) in the regular opening hours of the shopping mall with the restriction of not disturbing the daily life of shopkeepers and customers. Accessing the shops was explicitly forbidden since the evaluation only covered the common areas, like corridors or car park area. The competition organizers were present at three different times on that day to provide important information like the initial waypoint (lat, long, heading) for each on-site Track (Tracks 1 and 2), act as the main interface with Atlantis shopping mall and to answer those questions from the competitors, if possible. It is important to highlight that the organizers did not disturb or help in the calibration of the indoor positioning solutions.

The evaluation of the Track 1 teams was performed on Saturday, September 22nd in the morning, whereas the evaluation of the Track 2 teams was performed the same day, in the afternoon after lunch. All teams were requested to be present in a briefing meeting to inform them about the evaluation features and randomly assign the evaluation slot for each team. Each team had to be in the meeting room five minutes before the assigned time slot. Two people from the organizing team, the evaluators, accompanied the competitors to the initial point and ensured they arrived on-time for evaluation. Moreover, there were more people from the organizing team spread in the shopping center to ensure that the elevator, stairs and sitting places were available for all the competitors. The two main evaluators were in close contact with the teams during the evaluation. One of the evaluators acted as path discoverer, and she/he was a little ahead of the competitors during the evaluation. The main objective was to open the path in the presence of crowds in the shopping mall and visually indicate the next evaluation waypoint. The other evaluator remained close to the competitor. She/he gave indications about the next evaluation waypoint and checked that the competitor was acting according to the rules. Before starting, the competitors had a few seconds to initialize their system. Once the end of the evaluation path was reached, the competitor had to go directly to the meeting room with the two organizers and provide the position estimates. After the first round of evaluations, the teams were informed that they had a second chance to evaluate their solution. If a team decided to run the course a second time, only this second course would be evaluated.

For the off-site tracks, Track 3 and Track 4, competitors had to provide the position estimates the latest on September 14th, several days before the conference and competition. The evaluation trajectory was recorded by the track chairs in advance following a similar approach than the one reported for the on-site tracks. i.e., the competition organizers surveyed the area and collected the required data for the system calibration under realistic conditions (similar than the ones for the on-site tracks) and, after that, they recorded the data for positioning algorithms on the evaluation path simulating a real-time on-site evaluation.

The same format was expected for all the competition tracks. For each trial, the teams had to submit a CSV file, where each row represented a single estimated position. Each estimation had to include the timestamp in ms, the WGS84 longitude and latitude in decimal degrees with at least 9 decimal digit resolution, the floor number as an integer value (0 : Ground Floor, -1, 1, 2), the waypoint index in integer (waypoint number from 1 to N. 0 represents no landmark. Each specific integer represents the specific waypoint). The comma (“,”) was used as data delimiter and headers were not allowed in the CSV file. In Track 3, the timestamps for the waypoints were not provided to the competitors to avoid giving them many clues about the evaluation strategy. In that track, the competitors had to provide position estimates at a 2Hz frequency, synchronized with the beginning of the evaluation trajectory according to the timestamp provided in the evaluation log file.

B. ACCURACY SCORE ESTIMATION

The “accuracy score” was computed for each team by comparing the estimated coordinates with the reference coordinates of the waypoints marked on the ground and they were marching on during the competition. This metric combines the floor detection accuracy and the horizontal positioning error.

$$\varepsilon = \|\mathbf{P}_R - \mathbf{P}_E\| + p \cdot |f_R - f_E| \quad (29)$$

where

- \mathbf{P}_R are the ground truth horizontal coordinates
- \mathbf{P}_E are the horizontal coordinates estimated by the competitors
- $\|\mathbf{P}_R - \mathbf{P}_E\|$ is the horizontal error and it is computed as the Euclidean distance between the ground truth and the estimated position provided by the competitor in the 2D space.
- p is used to penalize errors in estimating the floor and is set to 15 m.
- $|f_R - f_E|$ is the absolute difference between actual floor number and the predicted one.

The positioning error, ε , is computed for all way-points marked on the ground that define the path of a specific challenge. The “accuracy score” s is given by the third quartile error, in meters, of a cumulative error distribution function

for all ε by:

$$s = 3^{\text{rd}} \text{quartile} \{ \varepsilon \} \quad (30)$$

The team with the lowest score won the challenge. Table 3 shows the scores for all the four challenges. Additional metrics included in the ISO 18305 Standard are also reported in the table.

TABLE 3. Competition results for the four challenges based on the 75th percentile (the competition main metric) and other well-known metrics of the positioning error as defined in eq. 29.

Track	Rank	Team Name	Mean	RMS	Median	75 th P.	90 th P.
Track 1	1 st	ARIEL-2	9.80	14.40	7.20	11.70	20.10
	2 nd	ARIEL-1	11.70	14.00	10.40	15.20	23.30
	3 rd	ETRI	16.20	19.30	14.60	18.90	28.40
Track 2	1 st	SONY	3.90	4.60	3.50	5.50	7.10
	2 nd	KYUSHU	5.20	7.20	3.60	5.70	15.50
	3 rd	SNU	4.50	5.20	4.40	6.80	8.50
	4 th	CLE	13.10	25.10	5.50	7.60	45.00
	5 th	ETRI	8.70	11.50	5.10	12.40	22.70
	6 th	TUM	12.80	14.70	12.00	15.00	20.60
	7 th	UPJS	30.30	38.70	25.40	37.50	62.60
Track 3	1 st	Five-WHU	0.70	1.00	0.50	0.90	1.90
	2 nd	EGEC	1.10	1.50	0.80	1.30	2.70
	3 rd	TENCENT	1.90	3.00	1.40	2.10	3.20
	4 th	TRIMBLE	2.40	3.40	1.60	2.70	4.80
	5 th	HFTS	3.00	3.90	2.40	3.60	6.70
	6 th	ARARADS	10.80	37.80	2.70	4.20	7.40
	6 th	UGENT	3.50	4.50	2.90	4.20	8.20
	8 th	CLE	4.10	5.20	3.30	6.00	8.20
	9 th	YAI	4.60	6.00	3.50	6.20	9.60
	10 th	TUM	6.30	8.30	5.00	7.60	14.20
	11 th	mCLIPS	8.00	11.70	5.40	8.80	19.50
	12 th	XMU	7.00	9.00	5.20	10.40	15.90
	13 th	MSU	10.20	14.50	7.30	12.20	19.50
Track 4	1 st	WHU	1.00	1.20	0.90	1.30	1.70
	2 nd	KIT	2.80	3.50	2.60	3.90	4.70
	3 rd	AOE	11.30	17.60	7.30	7.90	20.10
	4 th	YAI	66.10	72.70	58.80	90.80	113.50

A total of forty-nine world-wide teams registered for the competition. Although thirty-four teams finally participated in the competition, only the twenty-seven shown in the table agreed to publish the results. Some companies are not allowed to report the results and a few teams could not complete the evaluation path. Fifteen teams withdrew their proposal and did not participate in the competition.

C. ANALYSIS OF THE ON-SITE CHALLENGE RESULTS

Most of the teams that competed for the on-site challenges performed a comprehensive pre-survey of the shopping mall the day before the competition. The footpaths were kept secret until the competition day, therefore the teams surveyed rather large areas in a short time.

In Track 1, the accuracy score ranges from 11.7 to 19.9 meters, whereas it ranges from 5.5 to 37.5 meters for Track 2. Surprisingly, some self-contained positioning solutions, not using a camera, performed better than the ones using video processing. Specular reflection was not affecting the performances with a fully indoor path and not too many obstacles in the camera field were present since Track 1

competition happened in the morning with a shopping center not too crowded.

The most popular technologies for Track 1 were visible light, augmented and mixed reality (ARCore, ARKit), inertial sensors, segmented maps and images. For Track 2, they were mainly restricted to inertial sensors, barometers and indoor maps. Popular processing methods for Track 1 are based on particle filter (segmented maps and images) and hybridization (PDR and optical flow). The same processing methods were adopted for Track 2 but complemented by highly accurate MEMS error calibration and machine learning for step length estimation and activity recognition. Competitors carried their positioning systems, providing a more favorable context for the success of machine learning methods.

D. ANALYSIS OF THE OFF-SITE CHALLENGE RESULTS

In contrast to the on-site competitors, the teams that participated in the off-site competition had around 16 weeks to calibrate their solutions with the data provided by competition organizers. It is worth to mention that the data format and strategy to collect data was new to most of the competing teams, that had to adapt their existing solutions to the provided data.

In Track 3, the accuracy ranges from 0.90 to 12.30 meters whereas it ranges from 1.30 to 90.80 meters for Track 4. Although the accuracy for the Track 3 (based on smartphone data) was generally better than for the Track 4 (based on PDR), the competitors of Track 3 had a huge advantage in form of many geo-referenced training data inside the shopping mall to, for instance, generate the WiFi radio maps. In contrast, the Track 4 competitors did not have such kind of training and validation data.

The most popular technology for Track 3 was WiFi fingerprinting, which has been the core technology of most proposals. The competitors have improved the fingerprinting approach by refining the position estimates with the data provided by the other available technologies, this additional information mostly came from inertial sensors and the magnetometer. In fact, the most accurate systems combined data from multiple sources, including magnetometer.

For Track 4, only IMU, magnetometer records and GNSS signals were used. The competitors processed the several hours MEMS data-logs collected in static conditions to identify and calibrate the sensors' noises. The most popular mechanization was the "strap-down" one completed by complementary filters and stochastic cloning Kalman filter. To mitigate the impact of sensors drift in inertial signals, competitors applied machine learning techniques based on mobility patterns and generalized likelihood ratio tests to identify specific walking gait periods and correct the positioning error. Remarkably, precise results have been obtained for conveyer belt and stairway passages.

E. LESSONS LEARNED

The most important lesson learned is that moving the competition site to a shopping mall has attracted many teams from

academy and industry to participate in the proposed challenges. A total of 15 teams participated in the on-site tracks, with only one not able to provide the position estimates. The number of submissions for the on-site tracks was a success compared to previous editions were only 3 teams (2015) [61], 11 teams (2016) [12], [62] and 6 teams (2017) [11], [63] successfully provided the estimates on the evaluation path. Providing an evaluation schedule with tight slots was an additional motivation for competitors to ensure they had a robust solution. Moreover, 19 teams participated in the off-site tracks. The participation in the off-site tracks has also been notably higher than in previous editions, which demonstrates that selecting a shopping mall was a good choice.

Organizing a two-day competition is not trivial and it involves some additional workload for the conference organizers. The most important steps are detailed below:

- **Agreeing to a set of rules for the competition with the venue authorities and adhering to them.** A detailed agreement with the competition venue, the shopping mall, in this case, is required to organize the competition. This agreement must contain all the competition features and requirements should be detailed and had to be formalized many months beforehand. Thus, every aspect has to be well-documented and agreed with the shopping mall managers with little margin for any unexpected events or special requirements. Hopefully, some key information about the on-site and off-site competitions was collected more than one year before the competition and the most critical aspects were clarified by the organizers of the previous competitions in Sapporo (2017), Alcalá (2016) and Banff (2015). Attending the competition in Sapporo, September 2017, was crucial to understand the dynamics of the competition and draft the desired outputs for 2018. Thus, the final agreement did not only cover the competition days but also all the key aspects to organize the competition such as the venue mapping (see Section III) and the off-site data collection. Although the shopping mall managers were open to host the competition, they imposed the tight constraint of not disturbing the regular activities and daily-life in the shopping mall.
- **Planning in advance.** The competition challenges and routes must be closed before signing the agreement. In particular, the organizers defined all the competition challenges and scheduled the data collection for the off-site tracks in November 2017. In December 2017, all the waypoints and the final evaluation routes were also defined. Therefore, the evaluation paths were already known by the competition organizers at the end of 2017. As it has been said, there was little margin to, for instance, add a new competition track or extend an existing one after signing the agreement with the shopping mall.
- **Careful site surveying and mapping.** The accurate mapping of the competition venue is needed to provide the ground truth references within the ISO

18305 parameters. This procedure lasted 3 months, including on-site surveying and off-site post-processing. The venue and all the waypoints involved in the evaluation of the four tracks were accurately mapped. Lidar measurements were done the third week of January 2018 and the georeferenced waypoints were provided to Track chairs the first week of April 2018.

- **Thorough checking of competition data.** The data sets for the off-site tracks were provided to competitors in the last week of April 2018. The data sets release included the technical documentation and supplementary files in terms of georeferenced maps. Although the raw data sets were collected and cross-checked in January 2018, it took two weeks to generate the definitive anonymized geo-referenced data sets and the supporting maps. It is of importance to remark that data sets cross-checking has been of paramount importance in the competition. An error in one of the reference files or the evaluation trajectory might be enough for withdrawing a competition track. For the data sets collection, two people manually logged the key sequence of waypoints for all the log files separately. In case of inconsistency between the two logs, the wrong manual log was fixed if possible or, otherwise, the log file was removed. For the process of dataset anonymization and georeferenciation, also two people checked that the resulting logfiles with anonymized WiFi data and georeferenced landmarks were coherent with the manual logs and the raw log files collected in January.
 - **Screening of contestants by previous analysis of their methodological approach to indoor positioning.** The deadline to send the technical descriptions was set to the second week of July. All proposals were evaluated by two independent track chairs, who analyzed the proposal feasibility. Although 34 teams participated in the competition, we reviewed more than 40 proposals.
 - **Commitment to the competing teams.** During the Setup day, three chairs were in the shopping mall to act as the main interface with the shopping mall and to give some clarifications to the competitors about the competition rules. During the competition day, the local organizing team (10 people) plus 2 external people were engaged in the competition organization since 6 AM. They covered multiple roles in the competition, which also include the installation of ground stickers that defined the competition courses early in the morning of the competition day. Thanks to them, the competition ran smoothly.
- Regarding the on-site tracks, one team complained that the Non-camera based positioning challenge (Track 2), should have been split into two different challenges. They claim that Smartphone-based solutions had fewer opportunities to win and, therefore, they should have been evaluated independently. The organizing team defined the four challenges many months before receiving the description of the competition teams. Although one of the off-site challenges dealt with

Smartphone-based positioning, the organizing team decided not to forbid that kind of system in the Non-camera based positioning challenge. This concern was reported to the organizers of the competition in 2019, who finally included an on-site smartphone-based positioning challenge. Although all scenarios cannot be covered in the same competition edition, they can be considered if the event is run annually like this one.

One of the competitors claimed that the competition score only reflected the positioning accuracy without balancing it with the resources required. Previous editions of the EvAAL competition indeed considered the accuracy, installation complexity, user's acceptance, availability and integrability into AAL systems in the evaluation criteria [1]. However, any criteria will be subject to criticism due to the subjective selection of individual assessment criteria or their weighting in the final score. Therefore, the organizers selected an objective metric, the positioning error, as the main evaluation criterion having in mind that the competition is about indoor positioning and navigation. A solution to the issue raised by the competitors would be to organize many multiple tracks covering all the different aspects of the indoor positioning systems, but this approach was not possible due to limited resources that prevented the organizers to organize more than two on-site competition tracks. It is important to highlight, that the results of the competition and this document, which contains the description of some competing systems, are publicly available. Therefore, the competitors can argue and discuss their solutions considering additional parameters like complexity.

Some teams reported that this event allowed them to establish new collaborations with other participants. Some collaborations have been materialized into research visits, possible joint participation in the next editions and detailed discussions about the different strategies followed in the competition. Although the spirit of a competition is to compete, the organizing team considers that its main aim is to bring together the best research groups and encourage them to discuss their proposals. This is a very practical and less formal scenario to exchange knowledge and, above all, learn from the experience.

Some off-site competitors realized that the teams reporting the best results in Track 3 used data from the magnetometer. It seems that the magnetic data can be really useful to refine the estimations provided by, for instance, Wi-Fi fingerprinting. Most of the teams that used Wi-Fi and inertial data are considering to add this additional source of information to improve their systems. Thus, some teams gained some empirical experience because of participating in the competition and they will use this expertise to improve their approaches for the next editions.

To sum up, organizing a competition in a real-life environment: a shopping mall has been a challenging task. It supposed an additional workload that involved more than 12 people, including the organizing research team and collaborators from other universities and research centers, to cover

all aspects: accurately mapping the shopping mall, preparing four independent challenges, recording data for the off-site tracks, organizing a two-day event in a shopping mall without disturbing the customers. The on-site competitors had a challenging scenario to survey, in just one day, during the regular opening hours of the shopping mall without deploying any infrastructure to support localization, whereas the off-site competitors had to deal with some pre-collected data to provide the estimated positions of the blind evaluation path. The evaluation in the shopping mall, either on-site or off-site, also supposed an additional workload to the teams that participated in the competition. Although the workload was huge on both sides, it deserved any invested minute on the organization. All the competitors thanked the organization team for arranging the competition in such a challenging environment. The proposed evaluation was valuable to demonstrate that their solutions can work in a real-life scenario, which in turn is what the market is demanding.

VI. CONCLUSION

For the first time, the IPIN 2018 international indoor positioning competition took place in a real-life challenging space: the Atlantis shopping mall in Nantes (France). Four challenges (2 in real-time, 2 in post-processing mode) were prepared for the 49 registered worldwide competition teams. A survey combining differential GNSS, theodolite and mobile mapping 2D scanners enabled to map 9,000 m² and to compute the coordinates of 180 ground points spread over the 3 levels of the commercial center, with a 3D accuracy better than 10 cm. On September 22, 2018, all stickers, marking the way-points and used to define the paths to be followed by the competitors, were re-positioned on the ground thanks to the surveying and logging strategy followed.

This paper summarizes the main contributions presented in the competition and the details of the full results for comparison purposes. The ambition of this paper is also to draw lessons learned by the organizing committee but also by the competitors to improve the organization of future indoor positioning and indoor navigation competitions.

The most important conclusion is that the IPIN competition is not just an event where the participants compete. The main added value of the competition is the post-evaluation discussion. The informal talks about indoor positioning between the competitors are an excellent way to exchange knowledge. On-site competitors witnessed many different novel approaches and technologies for indoor positioning running in a challenging scenario. Off-site competitors learned the benefit of processing magnetic data for smartphone-based applications. While many indoor location technologies rely on an infrastructure of beacons deployed in buildings, the competition results have shown that it is possible to achieve high accuracy positioning with self-contained technologies. Finally, the competition has enabled some collaborations between different research teams, which was one of the main objectives of the competition. In general, the competition was not just a two-day event to compete for

a prize, but a forum to discuss, establish new collaborations and learn.

ACKNOWLEDGMENT

The IPIN 2018 competition organizers want to thank Viametris, the engineering school Ecole Supérieure des Géomètres et Topographes, the Région Pays de Loire and all the members of the GEOLoc laboratory and IFSTTAR as well as the people from the Atlantis shopping mall who participated in the organization of the competition.

AUTHOR CONTRIBUTIONS

The IPIN 2018 Competition local organizing team is composed by Valerie Renaudin, Miguel Ortiz and Johan Perul who lead the organization of the competition and the writing of this paper.

The Smartphone-based challenge (off-site) organizing team is composed by Joaquín Torres-Sospedra and Antonio Ramón Jimenez, who also lead the writing of this paper. Antoni Pérez-Navarro, Germán Martín Mendoza-Silva, Fernando Seco also contributed to this paper by organizing the Track 3 and reviewing this paper.

All teams represented in this paper have contributed with the description of their system and their invaluable feedback about their experiences in the competition:

- ARIEL-1 Team (Track 1) is composed by Vlad Landa, Shlomi Hacoheh, Nir Shvalb and Boaz Ben-Moshe
- ARIEL-2 Team (Track 1) is composed by Yael Landau, Revital Marbel, and Boaz Ben-Moshe
- ETRI/HANA MICRON Team (Track 1) is composed by Blagovest Vladimirov, Soyeon Lee, Eunyoung Cho, Sungwoo Jun, Changeun Lee, Sangjoon Park, Yonghyun Lee, Jehyeok Rew, Changjun Park, Hyeongyo Jeong, Jaeseung Han and Keumryeol Lee
- Google Team (Track 1) is composed by Ying Zhang
- ETRI/SNU/HANA MICRON Team (Track 2) is composed by Soyeon Lee, Blagovest Vladimirov, Eunyoung Cho, Sungwoo Jun, Changeun Lee, Sangjoon Park, So Young Park, Chan Gook Park, Yonghyun Lee, Jehyeok Rew, Changjun Park Hyeongyo Jeong, Jaeseung Han and Keumryeol Lee
- Kyushu Team (Track 2) is composed by Chuanhua Lu, Hideaki Uchiyama, Diego Thomas, Atsushi Shimada and Rin-ichiro Taniguchi
- TUM Team (Track 2) is composed by Georgios Pipelidis and Nikolaos Tsiamitros
- UPJS Team (Track 2) is composed by Miroslav Opiela
- ARARADS Team (Track 3) is composed by Tomás Lungenstrass and Juan Pablo Morales
- EGEN Team (Track 3) is composed by Zhenxing Ding and Feng Xu
- Five-WHU Team (Track 3) is composed by Xingyu Zheng, Feng Ye and Jian Kuang
- HFTS Team (Track 3) is composed by Stefan Knauth
- mCLIPS Team (Track 3) is composed by Muhammad Usman Ali, Sojung Hur and Yongwan Park

- UGENT Team (Track 3) is composed by Jens Trogh and David Plets
- TUM Team (Track 3) is composed by Georgios Pipelidis and Nikolaos Tsiamitros
- YAI Team (Track 3) is composed by Shih-Hau Fang, Yu Tsao, Ying-Ren Chien, Shi-Shen Yang and Shih-Jyun Ye
- KIT Team (Track 4) is composed by Nikolai Kronenwett
- AOE Team (Track 4) is composed by Wenchao Zhang, Xianghong Li and Dongyan Wei
- WHU Team (Track 4) is composed by Yu Li, Xiaoji Niu and Jian Kuang.
- YAI Team (Track 4) is composed by Shih-Hau Fang, Yu Tsao, Ying-Ren Chien, Shi-Shen Yang and Shih-Jyun Ye

REFERENCES

- [1] D. Salvi, P. Barsocchi, M. T. Arredondo, and J. P. L. Ramos, "EvAAL, evaluating AAL systems through competitive benchmarking, the experience of the 1st competition," in *Evaluating AAL Systems Through Competitive Benchmarking. Indoor Localization and Tracking*, S. Chessa and S. Knauth, Eds. Berlin, Germany: Springer, 2012, pp. 14–25.
- [2] F. Potortì, A. Crivello, and F. Palumbo, "The EvAAL evaluation framework and the IPIN competitions," in *Geographical and Fingerprinting Data to Create Systems for Indoor Positioning and Indoor/Outdoor Navigation (Intelligent Data-Centric Systems)*, J. Conesa, A. Pérez-Navarro, J. Torres-Sospedra, and R. Montoliu, Eds. New York, NY, USA: Academic, 2019, pp. 209–224.
- [3] F. Potortì, S. Park, A. R. J. Ruiz, P. Barsocchi, M. Girolami, A. Crivello, S. Y. Lee, J. H. Lim, J. Torres-Sospedra, F. Seco, R. Montoliu, G. M. Mendoza-Silva, M. D. C. P. Rubio, C. Losada-Gutiérrez, F. Espinosa, and J. Macias-Guarasa, "Comparing the performance of indoor localization systems through the EvAAL framework," *Sensors*, vol. 17, no. 10, pp. 1–28, 2017.
- [4] D. Lymberopoulos, J. Liu, X. Yang, R. R. Choudhury, S. Sen, and V. Handziski, "Microsoft indoor localization competition: Experiences and lessons learned," *GetMobile, Mobile Comput. Commun.*, vol. 18, no. 4, pp. 24–31, Oct. 2014. [Online]. Available: <http://doi.acm.org/10.1145/2721914.2721923>
- [5] D. Lymberopoulos, J. Liu, X. Yang, R. R. Choudhury, V. Handziski, and S. Sen, "A realistic evaluation and comparison of indoor location technologies: Experiences and lessons learned," in *Proc. 14th Int. Conf. Inf. Process. Sensor Netw. (IPSN)*, New York, NY, USA, 2015, pp. 178–189. [Online]. Available: <http://doi.acm.org/10.1145/2737095.2737726>
- [6] D. Lymberopoulos and J. Liu, "The microsoft indoor localization competition: Experiences and lessons learned," *IEEE Signal Process. Mag.*, vol. 34, no. 5, pp. 125–140, Sep. 2017.
- [7] *Geo IoT World Indoor Location Testbed*. Accessed: Aug. 9, 2019. [Online]. Available: <https://www.geoiotworld.com/testbed>
- [8] *PerfLoc: Performance Evaluation of Smartphone Indoor Localization Apps*. Accessed: Aug. 9, 2019. [Online]. Available: <https://perfloc.nist.gov/perfloc.php>
- [9] M. Arnold, J. Hoydis, and S. ten Brink, "Novel massive MIMO channel sounding data applied to deep learning-based indoor positioning," in *Proc. 12th Int. ITG Conf. Syst., Commun. Coding (SCC)*, Feb. 2019, pp. 1–6.
- [10] J. Torres-Sospedra, R. Montoliu, A. Martínez-Usó, J. P. Avariento, T. J. Armau, M. Bénédicto-Bordonau, and J. Huerta, "UJIIndoorLoc: A new multi-building and multi-floor database for WLAN fingerprint-based indoor localization problems," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Busan, South Korea, Oct. 2014, pp. 261–270. doi: [10.1109/IPIN.2014.7275492](https://doi.org/10.1109/IPIN.2014.7275492).
- [11] J. Torres-Sospedra, A. Jiménez, A. Moreira, T. Lungenstrass, W.-C. Lu, S. Knauth, G. M. Mendoza-Silva, F. Seco, A. Pérez-Navarro, M. J. Nicolau, A. Costa, F. Meneses, J. Farina, J. P. Morales, W.-C. Lu, H.-T. Cheng, S.-S. Yang, S.-H. Fang, Y.-R. Chien, and Y. Tsao, "Off-line evaluation of mobile-centric indoor positioning systems: The experiences from the 2017 IPIN competition," *Sensors*, vol. 18, no. 2, p. 487, 2018.

- [12] J. Torres-Sospedra, A. R. Jiménez, S. Knauth, A. Moreira, Y. Beer, T. Fetzer, V.-C. Ta, R. Montoliu, F. Seco, G. M. Mendoza-Silva, O. Belmonte, A. Koukofikis, M. J. Nicolau, A. Costa, F. Meneses, F. Ebner, F. Deinzer, D. Vaufraydaz, T.-K. Dao, and E. Castelli, "The smartphone-based offline indoor location competition at IPIN 2016: Analysis and future work," *Sensors*, vol. 17, no. 3, p. 557, 2017.
- [13] A. R. Jiménez, F. Seco, and J. Torres-Sospedra, "Tools for smartphone multi-sensor data registration and GT mapping for positioning applications," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Pisa, Italy, 2019, pp. 1–8.
- [14] *Information Technology—Real Time Locating Systems—Test and Evaluation of Localization and Tracking Systems*, Standard ISO/IEC 18305:2016, 2016.
- [15] A. R. J. Ruiz, G. M. Mendoza-Silva, M. Ortiz, A. Perez-Navarro, J. Perul, F. Seco, and J. Torres-Sospedra. Datasets and supporting materials for the IPIN 2018 competition track 3 (smartphone-based, off-site). Zenodo. Accessed: Apr. 2018. [Online]. Available: <https://doi.org/10.5281/zenodo.2823964#.XO6hP1V-qF8.mendeley>
- [16] S. Chable and V. Renaudin, "Couplage de mesures gps et inertielle pour de la navigation pedestre dans les batiments," *XYZ J.*, vol. 146, no. 146, pp. 27–32, 2016.
- [17] J. Le Scornec, M. Ortiz, and V. Renaudin, "Foot-mounted pedestrian navigation reference with tightly coupled GNSS carrier phases, inertial and magnetic data," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Sapporo, Japan, Sep. 2017, pp. 1–8.
- [18] V. Renaudin, M. H. Afzal, and G. Lachapelle, "Complete triaxis magnetometer calibration in the magnetic domain," *J. Sensors*, vol. 2010, Oct. 2010, Art. no. 967245.
- [19] D. W. Allan, "Statistics of atomic frequency standards," *Proc. IEEE*, vol. 54, no. 2, pp. 221–230, Feb. 1966.
- [20] D. W. Allan and J. A. Barnes, "A modified 'allan variance' with increased oscillator characterization ability," in *Proc. 35th Annu. Freq. Control Symp.*, May 1981, pp. 470–475.
- [21] M. Ortiz, J. Perul, J. Torres-Sospedra, and V. Renaudin. Datasets and supporting materials for the IPIN 2018 competition track 4 (foot-mounted IMU based positioning, off-site). Zenodo. Accessed: May 2019. [Online]. Available: https://doi.org/10.5281/zenodo.3228012#.XO6e_EBUk.mendeley
- [22] *Viametris: Mobile Mapping Solutions*. Accessed: Jul. 19, 2019. [Online]. Available: <https://www.viametris.com/?lang=en>
- [23] H. Durrant-Whyte and T. Bailey, "Simultaneous localization and mapping: Part I," *IEEE Robot. Automat. Mag.*, vol. 13, no. 2, pp. 99–110, Jun. 2006.
- [24] T. Bailey and H. Durrant-Whyte, "Simultaneous localization and mapping (SLAM): Part II," *IEEE Robot. Autom. Mag.*, vol. 13, no. 3, pp. 108–117, Sep. 2006.
- [25] VIAMETRIS. *PIMMS: Laser Scanner Point Clouds Post Processing Software*. Accessed: Mar. 13, 2019. [Online]. Available: <https://www.viametris.com/software>
- [26] J. Perul and M. Ortiz. *Colorized Adjusted Point Clouds of the Shopping Mall Atlantis in Nantes*. Accessed: Mar. 13, 2019. [Online]. Available: <https://ifstar.libcast.com/ame-geoloc/ipin-2018-ifstar/player>
- [27] V. Landa, B. Ben-Moshe, S. Hacoheh, and N. Shvalb, "GoIn—An accurate 3D indoor navigation framework for mobile devices," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Sep. 2018, pp. 1–8.
- [28] R. Mur-Artal, J. M. M. Montiel, and J. D. Tardós, "ORB-SLAM: A versatile and accurate monocular SLAM system," *IEEE Trans. Robot.*, vol. 31, no. 5, pp. 1147–1163, Oct. 2015.
- [29] A. Kendall, M. Grimes, and R. Cipolla, "Posenet: A convolutional network for real-time 6-dof camera relocalization," in *Proc. IEEE Int. Conf. Comput. Vis. (ICCV)*, Jun. 2015, pp. 2938–2946.
- [30] *ARCore*. Accessed: Aug. 9, 2019. [Online]. Available: <https://developers.google.com/ar/discover/>
- [31] *ARKit*. Accessed: Aug. 9, 2019. [Online]. Available: <https://developer.apple.com/arkit/>
- [32] T. Liu, X. Zhang, Q. Li, and Z. Fang, "A visual-based approach for indoor radio map construction using smartphones," *Sensors*, vol. 17, no. 8, p. 1790, 2017.
- [33] *Fused Location Provider API*. Accessed: Aug. 9, 2019. [Online]. Available: <https://developers.google.com/location-context/fused-location-provider/>
- [34] S. H. Shin, C. G. Park, J. W. Kim, H. S. Hong, and J. M. Lee, "Adaptive step length estimation algorithm using low-cost MEMS inertial sensors," in *Proc. IEEE Sensors Appl. Symp.*, Feb. 2007, pp. 1–5.
- [35] C. Lu, H. Uchiyama, D. Thomas, A. Shimada, and R.-I. Taniguchi, "Indoor positioning system based on chest-mounted IMU," *Sensors*, vol. 19, no. 2, p. 420, 2019.
- [36] S. O. H. Madgwick, A. J. L. Harrison, and R. Vaidyanathan, "Estimation of IMU and MARG orientation using a gradient descent algorithm," in *Proc. IEEE Int. Conf. Rehabil. Robot. (ICORR)*, Jun./Jul. 2011, pp. 1–7.
- [37] Widyawan, M. Klepal, and D. Pesch, "A Bayesian approach for RF-based indoor localisation," in *Proc. 4th Int. Symp. Wireless Commun. Syst. (ISWCS)*, Oct. 2007, pp. 133–137. [Online]. Available: <https://ieeexplore.ieee.org/document/4392316/authors#authors>
- [38] N. J. Gordon, D. J. Salmond, and A. F. M. Smith, "Novel approach to nonlinear/non-Gaussian Bayesian state estimation," *IEE Proc. F, Radar Signal Process.*, vol. 140, no. 2, pp. 107–113, Apr. 1993.
- [39] M. S. Arulampalam, S. Maskell, N. Gordon, and T. Clapp, "A tutorial on particle filters for online nonlinear/non-Gaussian Bayesian tracking," *IEEE Trans. Signal Process.*, vol. 50, no. 2, pp. 174–188, Feb. 2002.
- [40] C. Gentner, S. Zhang, and T. Jost, "Log-PF: Particle filtering in logarithm domain," *J. Elect. Comput. Eng.*, vol. 2018, Mar. 2018, Art. no. 5763461.
- [41] F. Galčík and M. Opiela, "Grid-based indoor localization using smartphones," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Oct. 2016, pp. 1–8.
- [42] M. U. Ali, S. Hur, S. Park, and Y. Park, "Harvesting indoor positioning accuracy by exploring multiple features from received signal strength vector," *IEEE Access*, vol. 7, pp. 52110–52121, 2019.
- [43] P. Bahl and V. N. Padmanabhan, "RADAR: An in-building RF-based user location and tracking system," in *Proc. 19th Annu. Joint Conf. IEEE Comput. Commun. Soc. (INFOCOM)*, vol. 2, Mar. 2000, pp. 775–784.
- [44] B. Shin, J. H. Lee, T. Lee, and H. S. Kim, "Enhanced weighted K-nearest neighbor algorithm for indoor Wi-Fi positioning systems," in *Proc. 8th Int. Conf. Comput. Technol. Inf. Manage. (ICCM)*, vol. 2, Apr. 2012, pp. 574–577.
- [45] J. Machaj, P. Brida, and R. Piché, "Rank based fingerprinting algorithm for indoor positioning," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Sep. 2011, pp. 1–6.
- [46] A. Aksu and P. Krishnamurthy, "Sub-area localization: A simple calibration free approach," in *Proc. 13th ACM Int. Conf. Modeling, Anal., Simulation Wireless Mobile Syst.*, Oct. 2010, pp. 63–72.
- [47] Z. Liu and J. Chen, "A new sequence-based iterative localization in wireless sensor networks," in *Proc. Int. Conf. Inf. Eng. Comput. Sci. (ICIECS)*, Dec. 2009, pp. 1–4.
- [48] S. Knauth and A. Koukofikis, "Smartphone positioning in large environments by sensor data fusion, particle filter and FCWC," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Oct. 2016, pp. 1–5.
- [49] S. Knauth, "Smartphone PDR positioning in large environments employing WiFi, particle filter, and backward optimization," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Sep. 2017, pp. 1–6.
- [50] S. Knauth, M. Storz, H. Dastageeri, A. Koukofikis, and N. A. Mähser-Hipp, "Fingerprint calibrated centroid and scalar product correlation RSSI positioning in large environments," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Oct. 2015, pp. 1–6.
- [51] W. Kang and Y. Han, "SmartPDR: Smartphone-based pedestrian dead reckoning for indoor localization," *IEEE Sensors J.*, vol. 15, no. 5, pp. 2906–2916, May 2015.
- [52] T. Willemsen, F. Keller, and H. Sternberg, "A topological approach with MEMS in smartphones based on routing-graph," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Oct. 2015, pp. 1–6.
- [53] D. Philipp, P. Baier, C. Dibak, F. Dürr, K. Rothermel, S. Becker, M. Peter, and D. Fritsch, "MapGENIE: Grammar-enhanced indoor map construction from crowd-sourced data," in *Proc. IEEE Int. Conf. Pervasive Comput. Commun. (PerCom)*, Mar. 2014, pp. 139–147.
- [54] J. Trogh, D. Plets, L. Martens, and W. Joseph, "Advanced real-time indoor tracking based on the viterbi algorithm and semantic data," *Int. J. Distrib. Sensor Netw.*, vol. 501, Jan. 2015, Art. no. 19.
- [55] K. Zoubert-Oussen, C. Villien, and F. Le Gland, "Comparison of post-processing algorithms for indoor navigation trajectories," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Oct. 2016, pp. 1–6.
- [56] J. Ruppelt, N. Kronenwett, and G. F. Trommer, "A novel finite state machine based step detection technique for pedestrian navigation systems," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Oct. 2015, pp. 1–7.
- [57] J. Ruppelt, N. Kronenwett, G. Scholz, and G. F. Trommer, "High-precision and robust indoor localization based on foot-mounted inertial sensors," in *Proc. IEEE/ION Position, Location Navigat. Symp. (PLANS)*, Apr. 2016, pp. 67–75.

- [58] N. Kronenwett, J. Ruppelt, and G. F. Trommer, "Motion monitoring based on a finite state machine for precise indoor localization," *Gyroscope Navigat.*, vol. 8, no. 3, pp. 190–199, Jul. 2017.
- [59] N. Kronenwett, S. Qian, K. Mueller, and G. F. Trommer, "Elevator and escalator classification for precise indoor localization," in *Proc. Int. Conf. Indoor Positioning Indoor Navigat. (IPIN)*, Sep. 2018, pp. 1–8.
- [60] N. Kronenwett, M. Kohler, J. Ruppelt, and G. F. Trommer, "Personal localization of task force members in urban environments," in *Proc. Sensor Data Fusion, Trends, Solutions, Appl. (SDF)*, Oct. 2017, pp. 1–6.
- [61] *EvAAL-ETRI On-Site and Off-Site Indoor Localization Competition*. Accessed: Aug. 9, 2019. [Online]. Available: <http://www.ucalgary.ca/ipin2015/call-papers/call-competition>
- [62] *IPIN 2016 Indoor Localization Competition*. Accessed: Aug. 9, 2019. [Online]. Available: <http://www3.uah.es/ipin2016/cfc.php>
- [63] *IPIN 2017 Indoor Localization Competition*. Accessed: Aug. 9, 2019. [Online]. Available: <http://www.ipin2017.org/callforcompetition.html>



VALERIE RENAUDIN received the M.Sc. degree in geomatics engineering from ESGT, in 1999, and the Ph.D. degree in computer, communication, and information sciences from the EPFL, in 2009. She was the Technical Director of Swissat Company, Samstagern, Switzerland, where she is developing real-time geopositioning solutions based on a permanent global navigation satellite system (GNSS) networks, and a Senior Research Associate with the PLAN Group, University of Calgary, AB, Canada. She is currently the Research Director (Full Professor) of the French Institute of Science and Technology for Transport, Planning and Networks (IFSTTAR), France. She is also leading the Geopositioning Laboratory (GEOLOC), IFSTTAR, where she built a team specializing in positioning and navigation for travelers in multimodal transport. Her current research interests include outdoor/indoor navigation using GNSS, and inertial and magnetic data, especially for pedestrians to improve sustainable personal mobility. She is a Steering Committee Member of the International Conference on Indoor Positioning and Indoor Navigation. She was a recipient of the European Marie Curie Career Integration Grant for the Project smartWALK.



MIGUEL ORTIZ received the M.Sc. degree in mechanics, automation, and engineering from École Nationale Supérieure d'Arts et Métier, in 2001. He joined the Lab after six years spent in a company, where he managed systems architecture for automotive applications expert in embedded electronic systems. Since 2017, he has been the Convener of CEN/CENELEC TC5-WG1 named Navigation and Positioning Receivers for Road Applications. He is currently a Research Engineer with the GEOLOC Laboratory, The French Institute of Science and Technology for Transport, Development, and Networks (IFSTTAR). His current research interests include software and hardware developments for both intelligent transport systems (ITS) and pedestrian navigation research field.



JOHAN PERUL received the B.E. degree in topography from the École supérieure des géomètres et topographes, Le Mans, France. He is currently pursuing the Ph.D. degree in autonomous localization by learning displacement dynamics in multimodal transport with the GEOLOC laboratory, The French Institute of Science and Technology for Transport, Development, and Networks (IFSTTAR), Nantes, France, in 2017. He was a 3D Engineer with Parallèle 45 Company.



JOAQUÍN TORRES-SOSPEDRA was born in Castelló, Spain, in 1979. He received the Ph.D. degree in ensembles of neural networks and machine learning from the Universitat Jaume I, in 2011. Since April 2013, he has been holding a research position with the Institute of New Imaging Technologies, where he leads Smartphone-Based Indoor Positioning Projects. He has authored more than 100 articles in journals and conference proceedings. His current research interests include indoor positioning solutions based on Wi-Fi and BLE, machine learning and evaluation. He has been the Chair of the Smartphone-Based Competition Track, since 2015 and has also been the Chair of the IPIN International Standards Committee, since 2018.



ANTONIO RAMÓN JIMÉNEZ was born in Santander, Spain, in 1968. He received the degree in physics and computer science, and the Ph.D. degree in physics from the Universidad Complutense de Madrid, Madrid, Spain, in 1991 and 1998, respectively. Since 1993, he has been with the Centre for Automation and Robotics, Spanish Council for Scientific Research, Madrid, where he holds a research position. He has authored more than 100 articles in journals and conference proceedings. His current research interests include local positioning solutions for indoor/GPS-denied localization and navigation of persons and robots, signal processing, Bayesian estimation, and inertial-ultrasonic-RFID sensor fusion. He is a Reviewer for many international journals and projects in the field.



ANTONI PÉREZ-NAVARRO received the bachelor's degree in physics from UAB, in 1995, and the Ph.D. degree in physics from the Universitat Autònoma de Barcelona (UAB), in 2000. He is currently the Director of the Technological Observatory, EIMT Department and of the Technical Collection of Books of Editorial Ediuoc, the Deputy Director of research with the eLearn Center, Universitat Oberta de Catalunya (UOC), and a Lecturer with the Computer Science, Multimedia and Telecommunication Department (EIMT Department). He was also with the Escola Universitària Salesiana de Sarrià (EUSS), where he gives classes in industrial engineering grades. His current research interests include indoor positioning and the prevention of diseases via smartphones. He has published several papers in international journals in all these topics and a Reviewer of several journals. He is part of the Technical Program Committee of IPIN and is one of the Organizers of the Symposium Challenges of Fingerprinting in Indoor Positioning and Navigation, Barcelona, in 2015.



GERMÁN MARTÍN MENDOZA-SILVA received the bachelor's degree in computer science from the University of Oriente, Cuba, in 2005, and the M.Sc. degrees in geospatial technologies from WWU, Germany, UNL, Portugal, and UJI, Spain, in 2015. He is currently pursuing the Ph.D. degree with the Institute of New Imaging Technologies, Universitat Jaume I de Castello, Spain, focused on WLAN-based indoor positioning, indoor navigation, machine learning, and GIS applications.



FERNANDO SECO was born in Madrid, Spain, in 1972. He received the degree in physics from the Universidad Complutense of Madrid, Madrid, in 1996, and the Ph.D. degree in physics from the Universidad Nacional de Educación a Distancia, Madrid, in 2002, with a dissertation about the mag-netostrictive generation of ultrasonic waves applied to a linear position sensor. Since 1997, he has been with the Center for Automation and Robotics, Spanish Council for Scientific Research,

Arganda del Rey, Madrid, where he holds a research position. His current research interests include the design and development of indoor local positioning systems, especially those based on ultrasonic and radio-frequency technologies in signal processing for CDMA-based localization systems, and in Bayesian estimation.



Yael LANDAU received the B.S. degree in computer science from Ariel University, Ariel, Israel, in 2017, where she is currently pursuing the M.S. degree in computer science and she was a Research Assistant with the Kinematics and Computational Geometry Laboratory, in 2017.



REVITAL MARBEL received the B.Sc. and M.Sc. degrees in computer science from Ariel University, Ariel, Israel, in 2009 and 2017, respectively, where she is currently pursuing the Ph.D. degree in computer science, with the collaboration of the Kinematics and Computational Geometry Laboratory. Her master's thesis involved in developing star-tracking algorithms for mobile devices. Her research interests include developing optical navigation and network optimization algorithms for mobile devices and nanosatellite laser communication.



BOAZ BEN-MOSHE received the Ph.D. degree in computer science from Ben Gurion University, in 2004. He held a postdoctoral position with SFU, Vancouver, from 2004 to 2005. Since 2005, he has been a Faculty Member with the Department of Computer Science, Ariel University. In 2008, he founded, with Prof. N. Shvalb, the Kinematics and Computational Geometry Laboratory, which includes several research groups in the fields of micro-robotics, wireless optimization, navigation, and medical devices. In 2015, he founded the Aerospace and Nano Satellite Research Center, where he is currently the Head. Since 2018, he has been the Chair of the Computer Science Department, Ariel University. His current research interests include computational geometry, navigation, mapping, autonomous, and bio-inspired robotics.




XINGYU ZHENG received the B.S. and M.S. degrees in cartography and geographical information system from Nanjing Normal University, Nanjing, China, in 2014 and 2017, respectively. He is currently pursuing the Ph.D. degree in geodesy and survey engineering with Wuhan University, Wuhan, Hubei, China. His research interests include indoor positioning, ubiquitous computing, machine learning, and channel state information.



FENG YE received the B.S. degree in automation and M.S. degree in optical engineering from the Huazhong University of Science and Technology, Hubei, China, in 2014 and 2017, respectively. He is currently pursuing the Ph.D. degree in geodesy and survey engineering, Wuhan University, Wuhan, Hubei, China. His research interests include indoor positioning, ubiquitous computing, machine learning, and the Internet of Things.



JIAN KUANG received the B.Eng. and M.S. degrees in geodesy and survey engineering from Wuhan University, Wuhan, China, in 2013 and 2016, respectively, where he is currently pursuing the Ph.D. degree with the GNSS Research Center. His research interests include indoor positioning and pedestrian dead reckoning.



YU LI was born in Changzhi, China, in 1995. He received the B.Eng. degree (Hons.) in geomatics engineering from the China University of Mining and Technology, Xuzhou, in 2016. He is currently pursuing the master's degree with the GNSS Research Center, GNSS/INS Group, Wuhan University, China. His research interests include aided inertial navigation and pedestrian navigation.



XIAOJI NIU was born in Xi'an, China, in 1973. He received the B.Eng. (Hons.) and Ph.D. degrees in mechanical and electrical engineering from Tsinghua University, Beijing, China, in 1997 and 2002, respectively. From 2003 to 2007, he was a Postdoctoral Fellow with the Mobile Multisensor Systems Research Group, Department of Geomatics Engineering, University of Calgary, Calgary, AB, Canada. He was a Senior Scientist with SIRF Technology, Inc., from 2007 to 2009. Since 2010, he has been a Professor with the GNSS Research Center, Wuhan University, and also the Head of GNSS/INS Group. His research interests include INS and GNSS/INS integration for land vehicle navigation and pedestrian navigation.



VLAD LANDA received the B.S. and M.S. degrees in computer science from Ariel University, Ariel, Israel, in 2016 and 2018, respectively, where he is currently pursuing the Ph.D. degree in computer science (deep learning) with the collaboration of the Physics and Eastern Research and Development Center, to forecast space weather and its phenomenon. In 2014, he was a Research Assistant with the Kinematics and Computational Geometry Laboratory, Ariel University. His current research interest includes developing indoor positioning system for the commercial of shelf devices.




SHLOMI HACOHEH is currently a Lecturer with the Department of Industrial Engineering and Management, Ariel University, Israel, where he is also with the Department of Mechanical Engineering. His research interests include robotics and control, especially on decision making under uncertainty conditions applied for robot's motion planning and pedestrian behavior modeling. He engaged in the research of multi-agents control under uncertain conditions.



NIR SHVALB is currently an Associate Professor with the Faculty of Engineering, Ariel University, Israel. He is also the Head of the Robotics and Kinematics Laboratory. He has authored robotics textbook, and published more than 60 scientific papers and patents. His current research interests include medical robotics global path planning and the theoretical foundations of robotics. He is the Founder of several startup companies including MeMic medical robotics, Innoging medical imaging, and IndoorGo.



CHUANHUA LU received the B.E. degree from the University of Science and Technology, China, in 2016, and the M.E. degree with the Laboratory for Image and Media Understanding, Kyushu University, in 2018. His research interests include indoor navigation, 3D modeling, and neural networks.



HIDEAKI UCHIYAMA received the B.E., M.E., and D.E. degrees from Keio University, in 2006, 2007, and 2010, respectively. Since 2018, he has been an Associate Professor with the Library Department, Kyushu University. His research interests include indoor navigation, computer vision, and augmented reality.



DIEGO THOMAS received the master's degree in informatics and applied mathematics from the Ecole nationale supérieure d'informatique et de mathématiques appliquées de Grenoble (ENSIMAG), France, in 2008, and the Ph.D. degree from The Graduate University for Advanced Studies (SOKENDAI), Japan, in 2012. From April 2012 to March 2015, he was a Postdoctoral Researcher with the National Institute of Informatics, Tokyo, Japan. From April 2015 to March 2017, he was a JSPS Postdoctoral Researcher with the University of Kyushu, Fukuoka, Japan. From April 2017, he is an Assistant Professor with the Graduate School of Information Science and Electrical Engineering (ISEE), Kyushu University. His research interests include 3D images registration, 3D reconstruction, and photometric analysis.



ATSUSHI SHIMADA received the M.E. and D.E. degrees from Kyushu University, in 2004 and 2007, respectively, where he is currently an Associate Professor with the Graduate School of Information Science and Electrical Engineering. His research interests include image processing, pattern recognition, and neural networks.



RIN-ICHIRO TANIGUCHI received the B.E., M.E., and D.E. degrees from Kyushu University, in 1978, 1980, and 1986, respectively. Since 1996, he has been a Professor with the Graduate School of Information Science and Electrical Engineering, Kyushu University, where he directs several projects including multiview image analysis and software architecture for cooperative distributed vision systems. His current research interests include computer vision, image processing and parallel, and the distributed computation of vision-related applications.



ZHENXING DING received the Ph.D. degree from the School of Instrument Science and Optoelectronics Engineering, Beihang University, Beijing, in 2016. He is currently an Engineer with the State Information Center, China. His research interests include artificial intelligence, advanced filtering techniques, MEMS-based pedestrian dead reckoning, smartphone-based indoor navigation, and visual/INS integration, among other related topics.



FENG XU is currently a Senior Engineer with the State Information Center, China. His current research interests include information engineering consultation, geographic information system (GIS), indoor and outdoor location navigation services, and the geographic information standardization, among other related topics.



NIKOLAI KRONENWETT received the M.Sc. degree in electrical engineering and information technology from the Karlsruhe Institute of Technology (KIT), Germany, in 2015. In September 2015, he was a Research Engineer with the Institute of Systems Optimization, KIT. His research interests include pedestrian navigation, vehicle localization, and the multisensor data fusion of complementary navigation systems.



BLAGOVEST VLADIMIROV received the B.S. degree in industrial automation from Technical University at Sofia, Bulgaria, and the M.E. and Ph.D. degrees in systems engineering from the Nagoya Institute of Technology, Japan. Since 2010, he has been a Researcher with the Electronics and Telecommunications Research Institute (ETRI), South Korea. His research interests include machine learning, cognitive systems, and their practical applications.



SOYEON LEE received the B.S. degree in statistics from Ewha Woman’s University, in 1992, the M.S. degree in statistics of computation from Seoul National University, in 1994, and the Ph.D. degree in computer and information science from Korea University, in 2015. Since 1994, she has been a Principal Researcher with the Electronics and Telecommunications Research Institute (ETRI), South Korea. From 2009 to 2012, she was an Associate Rapporteur of Question 27/WP2 of ITU-T

SG16. From 2017 to 2018, she served as the Standardization Director of the Korean Society of Automotive Engineers. Her current research interests include indoor positioning using pedestrian dead reckoning and Bayesian filtering, human interaction in AR/VR, and their military training applications.



EUNYOUNG CHO graduated from Ewha Woman’s University, South Korea, in 1986. She received the M.S. degree from the Korea Advanced Institute of Science and Technology (KAIST), in 1997, and the M.S.E. degree from Carnegie Mellon University—KAIST Collaboration Program, in 2006 and 2007, respectively. In 1986, she joined the Electronics and Telecommunications Research Institute (ETRI). Her research interests include database systems, software engineering,

wired/wireless communications, location-based service (LBS), and the Internet of Things (IoT).



SUNGWOO JUN received the M.S. degree in computer science from Chungbuk National University. Since 2011, he has been a Senior Researcher with the Electronics and Telecommunications Research Institute (ETRI), South Korea. His research interests include pose recognition, indoor positioning, deep learning, omnidirectional treadmill-based immersive virtual training systems, and their practical applications.



CHANGEUN LEE received the B.S. and M.S. degrees in electronics engineering from Hanyang University, Seoul, South Korea, in 1996 and 1998, respectively, and the Ph.D. degree in information and communication engineering from Chungnam National University, Daejeon, South Korea. From 1998 to 2000, he was a Researcher with LG Industry System, Seoul, South Korea, where he worked on intelligent building automation systems. Since 2001, he has been with the Electronics

and Telecommunications Research Institute (ETRI), Daejeon, South Korea, where he has made research in the fields of intelligent robot control systems and home network systems. His research interests include artificial intelligence, SLAM, robot software frameworks, and distributed and cooperative robot control.



SANGJOON PARK received the B.S. and M.S. degrees in electronics engineering from Kyungpook National University, in 1988 and 1990, respectively, and the Ph.D. degree in computer science from North Carolina State University, in 2006. From 1990 to 2001, he was a Senior Researcher with the Agency for Defense Development (ADD). Since 2006, he has been the Director of positioning and navigation technology with the Electronics and Telecommunications Research


Institute (ETRI), South Korea. His current research interests include positioning, wireless sensor networks, next generation embedded sensor networks, multisensor data fusion, and target tracking.



YONGHYUN LEE was born in Seoul, South Korea, in 1974. He received the B.S. degree in computer engineering from Soonchunhyang University, South Korea, in 1999. He developed H/W drivers for eBook devices, from 2000 to 2002. From 2002 to 2011, he was a Researcher with the Communications Research Institute, Motorola Korea, Inc. He is currently a Researcher with HANA MICRON, as a Development Team Leader. His current research interests include indoor positioning systems and GIS on the mobile services.



JEHYEOK REW received the B.S. degree in electronics and radio engineering from Kyung Hee University, South Korea, in 2012. He is currently pursuing the Ph.D. degree with the School of Electronic Engineering, Korea University, Seoul, South Korea. From 2017 to 2018, he was a Senior Researcher with HANA MICRON, South Korea. His current research interests include machine learning, image processing, bio-informatics, and information retrieval.



CHANGJUN PARK received the B.S. degree in computer education from Silla University, South Korea, in 2015, and the M.S. degree in electronics and computer engineering from Pusan National University, South Korea, in 2017. He is currently a Researcher with HANA MICRON, South Korea. His current research interests include machine learning, image processing, the IoT, and cloud computing.



HYEONGYO JEONG received the B.S. degree in computer engineering from Chungbuk National University, South Korea, in 2014. From 2017 to 2019, he was a Researcher with HANA MICRON, South Korea. He is currently a Manager with Hyundai Merchant Marine. His current research interests include cloud computing, EDI, the IoT, and block chain.



JAESEUNG HAN received the B.S. and M.S. degrees in robotics from Kwangwoon University, Seoul, South Korea, in 2015 and 2017, respectively. He is currently a Researcher with HANA MICRON, South Korea. His current research interests include image processing, robot design, and indoor positioning.



KEUMRYEOL LEE was born in Mokpo, South Korea, in 1980. He received the M.S. and Ph.D. degrees in human-computer interaction from Hanyang University, in 2010. From 2010 to 2014, he was a Principle Researcher with the Korea Telecom Group. He is currently a Platform Business Group Director with HANA MICRON, South Korea. His current research interests include artificial intelligence, machine learning, open platform, business intelligence, the IoT,


and mixed reality.



WENCHAO ZHANG received the B.S. degree in surveying engineering from the China University of Mining and Technology (CUMT), in 2013, and the M.S. degree in surveying engineering from Information Engineering University (IEU), in 2016. He is currently pursuing the Ph.D. degree in signal and information processing with the University of Chinese Academy of Sciences (UCAS). He currently belongs to Aero Information Research (AIR) Institute, Chinese Academy of Science (CAS). His research interests include multiinformation fusion method, integrated navigation algorithm, pedestrian autonomous positioning algorithm based on MEMS sensors, and pedestrian indoor positioning method based on inertial sensors.



XIANGHONG LI was born in Weiyuan, Sichuan, China, in 1987. She received the B.S. and M.S. degrees from the School of Automation Science and Electrical Engineering, Beihang University, in 2014. She is currently pursuing the Ph.D. degree in signal and information processing with the Chinese Academy of Sciences, Beijing, China, where she is also an Engineer with the Aerospace Information Research Institute (AIR). Her research interests include position indoor, pedestrian dead reckoning (PDR), integrated navigation, and information fusion. She was a recipient of the China Satellite Navigation Conference Best Paper Award, in 2016.



DONGYAN WEI received the B.S. degree in communication engineering from the University of Electronic Science and Technology of China (UESTC), in 2006, and the Ph.D. degree in signal and information processing from the Beijing University of Post and Telecommunication (BUPT), in 2011. He is currently a Research Fellow with the Aero Information Research (AIR) Institute, Chinese Academy of Science (CAS). He has authored one book, more than 30 articles, and more than 20 inventions. His research interests include indoor position, multisensor fusion, and positing in wireless networks. He was a TPC Member of IPIN 2019. He was the Deputy Chair of IPIN 2020.



YING ZHANG received the Ph.D. degree in computer science (specialized in artificial intelligence and robotics) from The University of British Columbia, Vancouver, Canada, in 1994. She was with the Xerox Palo Alto Research Center (PARC), a Technical Leader, and a Principal Investigator for various projects on distributed robotics, sensor networks, communication of mobile systems, and intelligence in social networks, funded by the Defense Advanced Research Projects Agency (DARPA). In addition, she has led programs in localization, tracking and indoor mapping, sponsored by PARC and other industry partners. She has published more than 80 papers and holds about 20 patents in these areas. She was the Information Director of *ACM Transaction on Sensor Networks*, from 2004 to 2012, an NSF Panelist for Research Fundings, and has served in Technical Program Committees for more than 20 conferences. She is currently a Software Engineer with Google Inc., Mountain View, CA, USA. She has cofounded the workshop on Mobile Entity Localization and Tracking (MELT), which was co-located with major ACM/IEEE conferences. Her current research interests include indoor semantic locations and efficient indoor mapping. She is a Senior Member of ACM.



SO YOUNG PARK received the B.S. degree from the School of Mechanical and Electrical Control Engineering, Handong Global University, in 2013. She is currently pursuing the Ph.D. degree with the School of Mechanical and Aerospace Engineering, Seoul National University, Seoul, South Korea. Her research interests include pedestrian dead reckoning, smartphone-based indoor navigation, context awareness, and AHRS.



CHAN GOOK PARK received the B.S., M.S., and Ph.D. degrees in control and instrumentation engineering from Seoul National University, South Korea, in 1985, 1987, and 1993, respectively. He has worked with Prof. J. L. Speyer on peak seeking control for formation flight with the University of California at Los Angeles (UCLA), Los Angeles, CA, USA, as a Postdoctoral Fellow, in 1998. From 1994 to 2003, he was with Kwangwoon University, Seoul, South Korea, as an Associate Professor. In 2003, he joined the Faculty of the School of Mechanical and Aerospace Engineering, Seoul National University, South Korea, where he is currently a Professor. From 2009 to 2010, he was a Visiting Scholar with the Department of Aerospace Engineering, Georgia Institute of Technology, Atlanta, GA, USA. His current research interests include advanced filtering techniques, high precision INS, GPS/INS integration, MEMS-based pedestrian dead reckoning, and visual inertial navigation. He has served as the Chair of the IEEE AES Korea Chapter, until 2009.



STEFAN KNAUTH received the Diploma degree in physics from Goethe Universität, Frankfurt, Germany, in 1996, and the Ph.D. degree in solid state physics from Universität Leipzig, Leipzig, Germany, in 2001. From 2005 to 2008, he was a Senior Research Assistant and the Deputy Head of the CEESAR Centre (now iHomeLab), Lucerne University of Applied Sciences, Lucerne, Switzerland. Since 2008, he has been a Full Professor of computer science with the Hochschule für Technik Stuttgart, Stuttgart, Germany. His research was focused around ambient assisted living and smart energy. Earlier stations include 3GPP System Engineer for Siemens ICM/ICN, and System Engineer for ISS Research Payloads in cooperation with ESA and Kayser-Threde (now OHB System AG). His research interests include indoor positioning, the IoT, low resource embedded systems, building automation, and mobile applications.



GEORGIOS PIPELIDIS received the B.S. degree from the Technical Educational Institute of Western Macedonia, Kozani, Greece, and the M.S. degree in pervasive computing from Johannes Kepler University, Linz, Austria, in 2015. He is currently pursuing the Ph.D. degree with the Technische Universität München, Germany, where he is focusing on precise localization on and machine learning for information fusion. He is an active member of the indoor positioning and indoor mapping community, with more than 12 publications in the field and two patents. He has work experience with ILF Consulting Engineers in the field of 3D modeling for indoor areas and flow dynamic simulation for particle propagation, for which he received an excellence award. He is the Co-Founder of www.AriandeMaps.com, which is focusing on precise localization indoors.



NIKOLAOS TSIAMITROS received the B.S. degree from the National Technical University of Athens and the M.S. degree in software engineering from the Technische Universität München, Munich, Germany, in 2018, where he is currently pursuing the Ph.D. degree in indoor localization and information fusing. He was with Siemens and Amazon in the field of indoor localization and mapping. Since 2017, he has published four papers in the field of indoor localization, and he holds one patent in the area. He is the Co-Founder of www.AriadneMaps.com, which is focusing on precise localization indoors.



TOMÁS LUNGENSTRASS received the B.S. degree in mathematical engineering from the Pontificia Universidad Católica de Chile, the Ingénieur Polytechnicien (M.S. level) from the École Polytechnique de Paris, in 2015, and the M.S. and Ph.D. degrees in mathematics from the Pontificia Universidad Católica de Chile. Since 2016, he has been a Lead Data Scientist with Arara, Santiago, Chile, where he has focused in indoor positioning technologies and mathematical and computational tools for the digitalization of physical environments.



JUAN PABLO MORALES received the Ingénieur Polytechnicien (M.S. level) degree in pure mathematics from the École Polytechnique, in 2011, and the M.S. degree in entrepreneurship from HEC Paris. He founded Arara, a company that focuses on venue analytics through WIFI and computer vision, in 2013.



JENS TROGH received the M.S. degree in electrical engineering from Ghent University, in 2014. He has been a member of the imec-WAVES Group, Department of Information Technology-INTEC, Ghent University, since 2014. His research interests include location tracking in indoor and outdoor environments.



DAVID PLETS (M'16) has been a member of the imec-WAVES Group, Department of Information Technology—INTEC, Ghent University, since 2006, where he has been an Assistant Professor, since 2016. His current research interests include the optimization of wireless communication and broadcast networks, with a focus on coverage, exposure, and interference. He is also strongly involved in research on localization techniques and the IoT, for both industry- and health-related applications.



MIROSLAV OPIELA was born in Prešov, Slovakia, in 1991. He received the B.S. and M.S. degrees in computer science from P. J. Šafárik University (UPJS), Košice, Slovakia, where he is currently pursuing the Ph.D. degree. His research interests include smartphone-based indoor positioning and Bayesian filtering.




SHIH-HAU FANG is currently a Full Professor with the Department of Electrical Engineering, MOST Joint Research Center for AI Technology and All Vista Healthcare, Yuan Ze University (YZU), Taiwan. He is also a Technical Advisor of HyXen and PTCom Technology Company Ltd. His research interests include artificial intelligence, mobile computing, machine learning, and signal processing. He was a recipient of several awards for his research work, including the Young Scholar Research Award (YZU, 2012), the Project for Excellent Junior Research Investigators (MOST, 2013), the Outstanding Young Electrical Engineer Award (the Chinese Institute of Electrical Engineering, 2017), the Outstanding Research Award (YZU, 2018), the Best Synergy Award (Far Eastern Group, 2018), and the Y.Z. Outstanding Professor Award (Y.Z. Hsu Science and Technology Memorial Foundation, 2019). He is an Associate Editor for *IEICE Transactions on Information and Systems*, and serves as an YZU President's Special Assistant.



YU TSAO received the B.S. and M.S. degrees in electrical engineering from National Taiwan University, Taipei, Taiwan, in 1999 and 2001, respectively, and the Ph.D. degree in electrical and computer engineering from the Georgia Institute of Technology, Atlanta, GA, USA, in 2008. From 2009 to 2011, he was a Researcher with the National Institute of Information and Communications Technology, Tokyo, Japan, where he was involved in research and product development of automatic speech recognition for multilingual speech-to-speech translation. He is currently an Associate Research Fellow with the Research Center for Information Technology Innovation, Academia Sinica, Taipei. His research interests include speech and speaker recognition, acoustic and language modeling, audio-coding, and biosignal processing. He was a recipient of the Academia Sinica Career Development Award, in 2017, and the National Innovation Award, in 2018.



YING-REN CHIEN received the B.S. degree in electronic engineering from the National Yunlin University of Science and Technology, Douliu, Taiwan, in 1999, and the M.S. degree in electrical engineering and the Ph.D. degree in communication engineering from National Taiwan University, Taipei, Taiwan, in 2001 and 2009, respectively. Since 2012, he has been with the Department of Electrical Engineering, National Ilan University, Yilan, Taiwan, where he is currently a Full Professor. His research interests include adaptive signal processing theory, machine learning, the Internet of Things, and interference cancellation.



SHI-SHEN YANG received the B.S. degree in electronic engineering from the Minghsin University of Science and Technology, Hsinchu, Taiwan, in 2016, and the M.S. degree from the Department of Electrical Engineering, National Ilan University, in 2019. His research interests include indoor positioning, machine learning, and signal processing.



SHIH-JYUN YE received the B.S. degree from the Department of Electrical Engineering, Yuan Ze University, Taiwan, in 2017, where he is currently pursuing the M.S. degree with the Department of Electrical Engineering. He serves as an Assistant with the MOST Joint Research Center for AI Technology and All Vista Healthcare, Taiwan. His research interests include speech processing, big data, and indoor localization.



MUHAMMAD USMAN ALI received the M.S. degree in computer network engineering from the University of Engineering and Technology at Taxila, Pakistan, in 2008, and the Ph.D. degree in information and communication engineering from Yeungnam University, South Korea, in 2019. Since 2011, he has been serving as an Assistant Professor with the Department of Computer Science, University of Gujrat, Pakistan. His current research interests include multisensor fusion-based indoor positioning systems, Wi-Fi fingerprinting, indoor navigation and mapping, and computer vision technologies.



SOOJUNG HUR received the B.S. degree from Daegu University, Gyeongbuk, South Korea, in 2001, the M.S. degree in electrical engineering from the San Diego State University, San Diego, in 2004, and the M.S. and Ph.D. degrees in information and communication engineering from Yeungnam University, South Korea, in 2007 and 2012, respectively. She is currently a Research Professor with the Mobile Communication Laboratory, Yeungnam University. Her current research interests include performance of mobile communication, indoor/outdoor location, and unnamed vehicle.



YONGWAN PARK received the B.E. and M.E. degrees in electrical engineering from Kyungpook University, Daegu, South Korea, in 1982 and 1984, respectively, and the M.S. and Ph.D. degrees in electrical engineering from The State University of New York, Buffalo, USA, in 1989 and 1992, respectively. He was with the California Institute of Technology, as a Research Fellow from 1992 to 1993. From 1994 to 1996, he served as a Chief Researcher for developing IMT-2000 system with SK Telecom, South Korea. From January to February of 2000, he was an Invited Professor with the NTT DoCoMo Wireless Laboratory, Japan. He was also a Visiting Professor with UC Irvine, USA, in 2003. From 2008 to 2009, he served as a Director of the Technology Innovation Center for Wireless Multimedia by the Korean Government. From 2009 to March 2017, he also served as the President of the Gyeongbuk Institute of IT Convergence Industry Technology (GITC), South Korea. Since 1996, he has been a Professor of information and communication engineering with Yeungnam University, South Korea. His current research interests include 5G systems in communication, OFDM, PAPR reduction, indoor location-based services in wireless communication, and smart sensors (LIDAR) for the smart car. He is also serving as the Chairman of the 5G Forum Convergence Service Committee, South Korea.

...