

## EXTENSIONS OF SUBCHANFLOW FOR THERMAL HYDRAULIC ANALYSIS OF MTR-CORES

J.C. ALMACHI, U. IMKE, V.H. SANCHEZ-ESPINOZA

*Institute for Neutron Physics and Reactor Technology, Karlsruhe Institute of Technology  
Hermann-von-Helmholtz-Platz 1, 76344 Eggenstein-Leopoldshafen – Germany*

### ABSTRACT

As part of efforts to develop advanced multi-physics computational methods for safety analysis of research reactors with plate-type fuel, the subchannel thermal hydraulic code, SubChanFlow, has been extended and modified for the analysis of MTR-cores with plate-type fuel. A new heat conduction module for fuel plate and the corresponding heat transfer correlations for narrow rectangular channels of downward flow were implemented. The extended code is validated using experimental data of the RA-6 test facility. The results obtained show a good agreement between SubChanFlow predictions and measured cladding temperature along the core height. The deviations varies between  $\pm 4$  °C and  $\pm 18$  °C when the Colburn and Y. Sudo correlations are used, respectively. Main results and future work will be presented and discussed.

### 1. Introduction

In the last decades, the development of advanced simulation tools for the analysis of nuclear reactors has experienced an increase due to the remarkable improvement of computing resources. As a result, numerous simulation tools have been developed specifically for the thermo-hydraulic analysis of power reactors [1] [2]. Despite the fact that research reactors are used in numerous fields, thermo-hydraulic analyses have been carried out with system code adaptations, heuristic methods, and geometric approximations that, although they allow obtaining acceptable simulations, are far from carrying out detailed analysis. Another problem that arises when using these adaptations is the direction of coolant flow and the use of correlations developed for fuel rod analysis [3] [4] [5] [6].

In this paper, the extension of SubChanFlow for the analysis of research reactor with plate-type fuel is presented. To achieve this goal, a new heat conduction module for plates, model of downward flow, and correlations for rectangular narrow channels have been added. To validate the new version of SubChanFlow, the experimental data obtained in the test facility RA-6 is used [7] [8].

### 2. The thermal-hydraulic subchannels code SubChanFlow

SubChanFlow is a subchannel thermo-hydraulic code developed in the Karlsruhe Institute of Technology for analysis of fuel rod bundles and cores [9]. SubChanFlow enables both a subchannel and fuel assembly level thermo-hydraulic analysis of both hexagonal and square fuel assemblies. It is coupled with different deterministic and Monte Carlo codes for nodal or pin level core analysis taking into account the local feedback between neutronics and thermal hydraulics [10]. Single-phase and two-phase flow conditions are handled by solving a system of three mixed equilibrium equations for steady and transient flow situations. Additionally, a cross-flow model at the pin and fuel assembly level is available to describe the lateral exchange of mass, momentum, and energy between neighbouring cells [11].

Various coolant types can be used e.g. water (IAPWS-97), liquid metals (sodium and lead), and gases (helium, air etc.) as working fluids.

## 2.1 Short description of main physical models

### Basic conservation equations:

The system of conservation equations is solved for each subchannel considering the heat transfer between the coolant of each subchannel with the corresponding fuel rods. Fig. 1 shows that in a fuel assembly, different subchannel types may exist and each subchannel is axially subdivided into meshes.

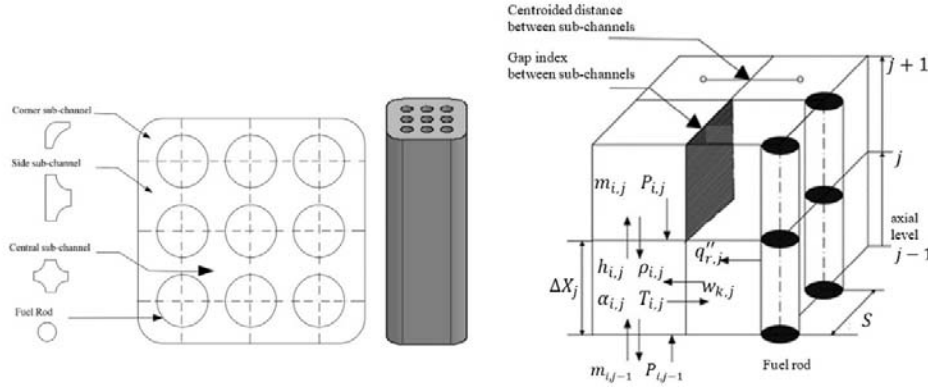


Fig. 1. Lateral and axial discretization of the thermal -hydraulic control volume

The basic conservation equations in finite difference form written as follows:

#### Mass conservations

$$A_i \frac{\Delta X_j}{\Delta t} (\rho_{i,j} - \rho_{i,j}^n) + (m_{i,j} - m_{i,j-1}) + \Delta X_j \sum_{k \in i} e_{i,k} w_{k,j} = 0 \quad (1)$$

#### Axial momentum conservation

$$\begin{aligned} \frac{\Delta X_j}{\Delta t} (m_{i,j} - m_{i,j}^n) + m_{i,j} U'_{i,j} + \Delta X_j \sum_{k \in i} e_{i,k} w_{k,j} U'_{k,j} \\ = -A_i (P_{i,j} - P_{i,j-1}) - g A_i \Delta X_j \rho_{i,j} \cos \theta \\ - \frac{1}{2} \left( \frac{\Delta X f \Phi^2}{D_h \rho l} + K v'^* \right)_{i,j} |m_{i,j}| \frac{m_{i,j}}{A_i} - f_T \Delta X_j \sum_{k \in i} w'_{k,j} U'_{i,j} - U'_{n,j} \end{aligned} \quad (2)$$

#### Lateral momentum conservation

$$\frac{\Delta X_j}{\Delta t} (w_{k,j} - w_{k,j}^n) + (\bar{U}'_{k,j} w_{k,j} - \bar{U}'_{k,j-1} w_{k,j-1}) = \frac{S_k}{l_k} \Delta X_j \Delta p_{k,j-1} - \left( K_G \frac{\Delta X v'_k}{S_k l_k} \right)_j |w_{k,j}| w_{k,j} \quad (3)$$

#### Enthalpy conservation

$$\begin{aligned} \frac{A_i}{\Delta t} [\rho_{i,j} (h_{i,j} - h_{i,j}^n) + h_{i,j} (\rho_{i,j} - \rho_{i,j}^n)] + \frac{1}{\Delta X_j} (m_{i,j} h_{i,j}^* - m_{i,j-1} h_{i,j-1}^*) \\ + \sum_{k \in i} e_{i,k} w_{k,j} h_{k,j}^* = \sum_{r \in i} P_r \Phi_{i,r} q''_{r,j} \\ - \left[ \sum_{k \in i} w'_{k,j} (h_{i,j} - h_{n,j}) + \sum_{k \in i} C_k S_k (T_{i,j} - T_{n,j}) \right] + \sum_{r \in i} r_Q \Phi_{i,r} q'_{r,j} \end{aligned} \quad (4)$$

In order to mathematically close the system of equations, many empirical correlations are needed e.g. for the wall friction, wall /coolant heat transfer and wall heat flux, as well as for the void fraction.

### 3. Extension of SubChanFlow

For the application of SubChanFlow to investigate the thermal hydraulic behaviour of MTR-cores, a new heat conduction module for plates, the modelling of downward coolant flow, and different correlations dedicated to rectangular channel analysis were added to the code.

#### 3.1 Heat conduction for plate

A new module was implemented to solve the 1D heat conduction equation for a thin plate in contact with coolant at both sides at temperature  $T_f$ , Fig. 2.




Fig. 2. 1D conduction through a wall

In order to solve Equation 5, a finite volume method is used and in combination with the Thomas algorithm the linear system is solved [12].

$$\rho C_p \left( \frac{\partial T}{\partial t} \right) = \frac{\partial}{\partial x} K_p \left( \frac{\partial T}{\partial x} \right) + \dot{q} \quad (5)$$

#### 3.2 Downward flow

To describe the downward flow and consider the gravity forces in Equation 2, the definition of the angle ( $\theta$ ) and hence the term  $\cos(\theta)$  in the axial momentum conservation has been extended for this range:  $0^\circ \leq \theta \leq 180^\circ$ , Fig. 3. In this approach, all other characteristics of the code were retained, see Fig. 4.

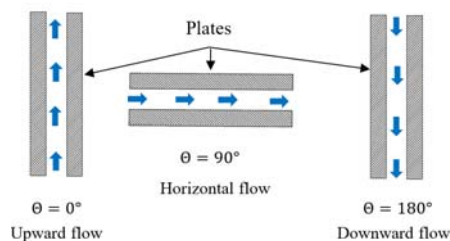


Fig. 3. Fluid direction

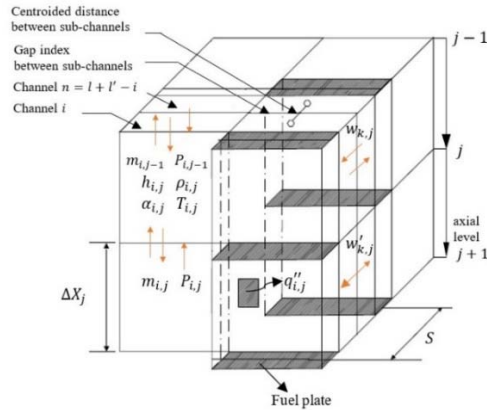


Fig. 4. Control volume for mass momentum and energy balance

### 3.3 Empirical correlations

After a literature review [10], [11], [12], [13], [14] heat transfer correlations for MTR-cores considering up and downward were selected. In Tab 1 and 2, a list of these correlations for the heat transfer and friction is shown.

Tab 1: Heat transfer correlation for plate

Institutio n/Reactor	Correlation	Name/Ref
ORNL/HFI R	$Nu = 0.027Re^{0.8}Pr^{\frac{1}{3}}\left(\frac{\mu_b}{\mu_w}\right)^{0.14}$ $1.14 \times 10^4 < Re < 1.65 \times 10^5$ The bulk-to-wall viscosity factor, 1.02	Sieder-Tate [13]
MIT/MITR	$Nu = 0.023Re^{0.8}Pr^{1/3}$ $6.5 \times 10^3 < Re < 20 \times 10^3$	Colburn [14]
JAERI/JR R-3	$Nu = 0.023Re^{0.8}Pr^{0.4}$ $500 < Re < 50 \times 10^3$	Dittus-Boelter [15]
JAERI/JR R-3	$Nu = \frac{0.0296Re^{0.8}Pr}{[1 + 1.54Pr^{-\frac{1}{4}}Re^{-0.1}(Pr - 1)]}$ $Re > 10^4$	Y. Sudo [16]
ORNL/HFI R	$Nu = \frac{(f/8)(Re - 1000)Pr}{[1 + 12.7(f/8)^{1/4}(Pr^{2/3} - 1)]}$ $3000 < Re < 5 \times 10^6$	Gnielinski [17]

Tab. 2: Pressure drop for plate

Friction factor	Equations	Name/Ref.
Laminar	$f = \frac{96}{Re}$ $Re < 2300$	Lie Li [18]
Turbulent	$f = 0.3164Re^{-0.25}$ $3000 < Re < 10 \times 10^4$	

In Fig. 5, the flowchart of the extended SubChanFlow code is shown, where the modules dealing with plates as fuel can be seen within the modular structure of the code.

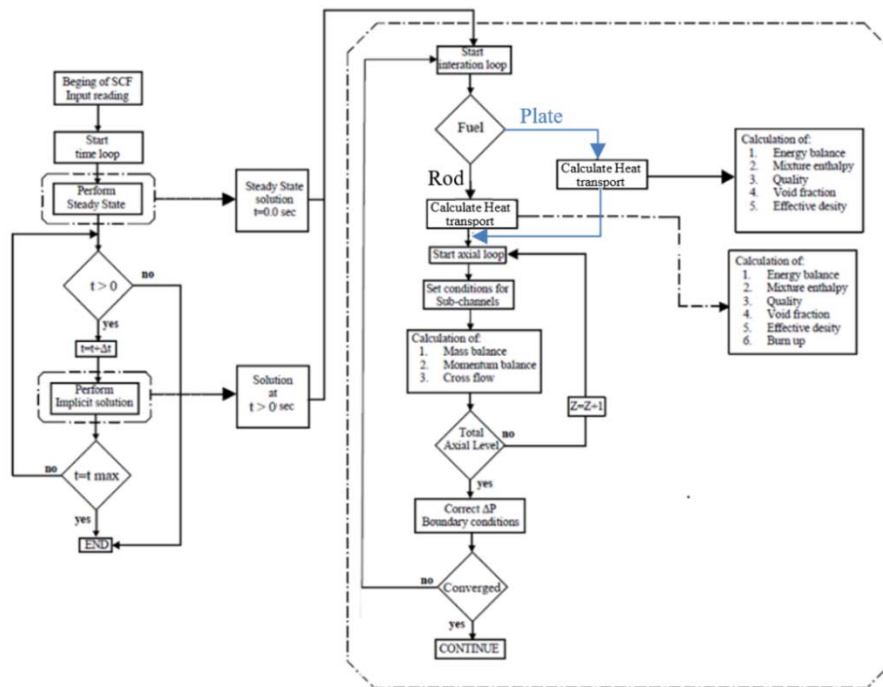


Fig. 5. SubChanFlow flow chart of solution procedure

#### 4. Validation of SubChanFlow

For the validation of the SubChanFlow code, the experimental data of the test RA-6 done at the Centro Atómico de Bariloche and the Instituto Balseiro are used. The experimental device RA-6 is a 1:1 scale replica of the cooling channel inside the RA-6 reactor. The main parameters of the facility and the tests will be described below [7].

##### 4.1 Description of the RA-6 test

The RA-6 experimental device consists of several circuits, Fig. 6. The pressure regulation circuit is responsible for maintaining a constant flow of pressurized refrigerant at 1.7 bar absolute, the pressure measurement is made of a Differential Pressure cell sensor (DP-cell) located at the entrance of the test section. Before reaching the test section, the coolant passes through 20 and 50 micron filters to deionise it and retain important particles to ensure electrical conductivity below  $2\mu S$ .

The test section consists of two TP-100 sensors and 10 K-type thermocouples located along the aluminium plates. The TP-100 sensors are used to collect fluid temperature values at the entrance and exit of the test section, and the thermocouples, located 2 mm deep at the back of the aluminium plates, perform the coating temperature data collection.

The aluminium plates are heated using electrical energy provided by the Bruker model BMN 70-700 of 250 Amp. The aluminium plates are insulated to avoid heat loss to the outside [8] [7]. Finally, Table 3 summarizes the reference data of the RA-6 experimental device.

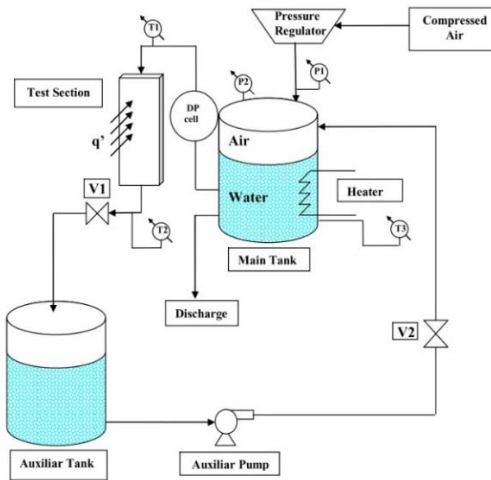


Fig. 6. Experimental setup scheme. [8]

Table 3: Main parameters of the RA-6 test

<b>Boundary conditions</b>	
Power (kW)	25
Pressure (MPa)	1.7
T inlet (°C)	38
Mass flow rate (kg/s)	0.1615
Flow direction	Downward
Reynolds range	$7 \times 10^3 < Re < 1.4 \times 10^4$
<b>Channels flow dimensions</b>	
Thickness (m)	0.0027
Width (m)	0.06
Height (m)	0.76
<b>Plate dimension effective</b>	
Width (m)	0.06
Height (m)	0.62
Thickness (m)	0.005

## 4.2 Test section

A top view of the test section can be seen in Fig. 7. The rectangular test section formed by the aluminium plates and separated by Teflon bands has a dimension of 2.7 mm thickness by 60 mm wide. The height of the experimental device is 76 cm of which only 62 cm are electrically heated, the rest is divided equally for the implementation of flow and temperature measurement devices.

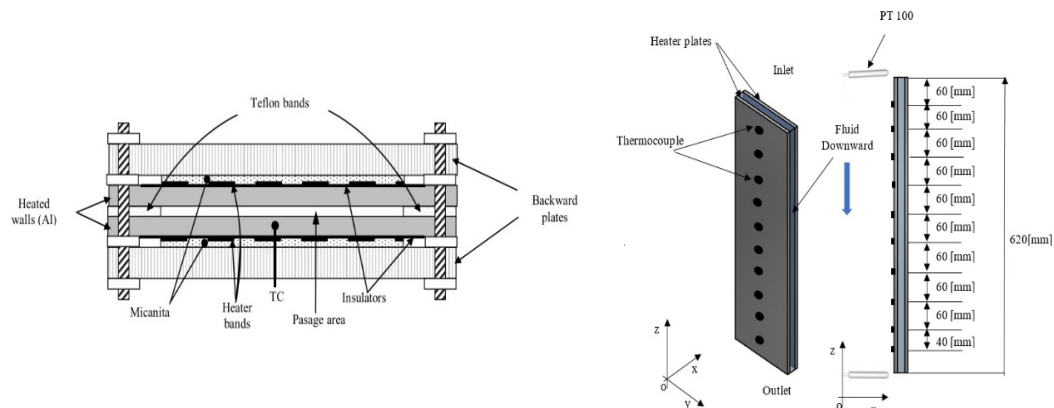


Fig. 7. Test section RA-6 [8]

### 4.3 SubChanFlow Modeling

The coolant channel is represented by one subchannel with 100 axial mesh cells. Each heating plate associated to the model has a total of 5 nodes at radial level and 100 axial mesh cells. The sum of the axial cells is equal to the effective height, Fig. 8. It can be observed that the heater and the plate are radially subdivided in two meshes, respectively.

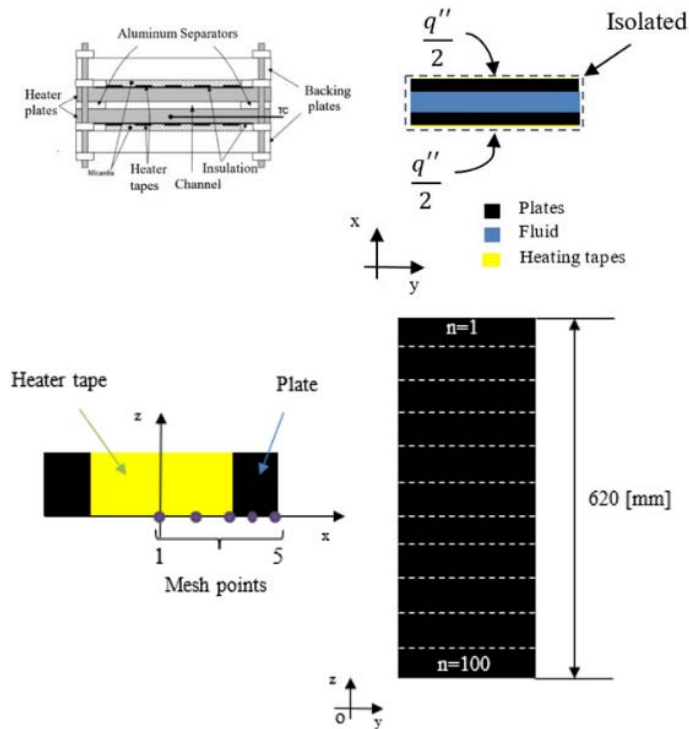


Fig. 8. Plate fuel and coolant axial and radial discretization

Using the described model of the RA-6 tests, SubChanFlow simulations of the test considering the boundary conditions (e.g. coolant mass flow rate, coolant temperature, system pressure, etc.) and using the five correlations listed in Tab 1 and Tab. 2 are performed.

## 5. Results and discussions

For the validation of the extended SubChanFlow code, a comparison of the code predictions is performed with the measured data (cladding temperature of the plate) using different heat transfer correlations.

Fig. 9 shows 5 the comparison of the axial cladding temperature predicted by SubChanFlow with the experimental values reported by N. Silin and A. Vertullo [7]. Each temperature profile corresponds to the use of a specific heat transfer correlation summarized in Tab 1.

If Colburn's correlation is used the values predicted by SubChanFlow are closer to the experimental values than the ones calculated with the correlations of Dittus-Boelter, Gnielinski, and Sieder-Tate.

It is worth to note that the axial cladding temperature predicted by SubChanFlow with the Y-Sudo correlation is really out of range compared to the experimental values.

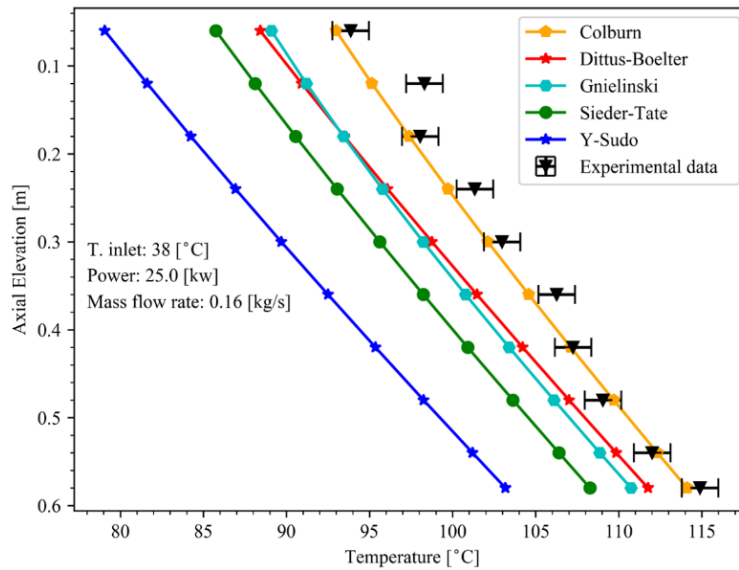


Fig. 9. Comparison of the cladding temperature distribution using different heat transfer correlation

In Fig. 10, the deviation of the axial temperature predicted by SubChanFlow with the different heat transfer correlations from the experimental data is shown. Deviations are between  $\pm 4$  and  $\pm 18$  °C. Based on these results, it can be stated that the Colburn correlation is the best one for MTR-cores under the conditions of the RA-6 test.

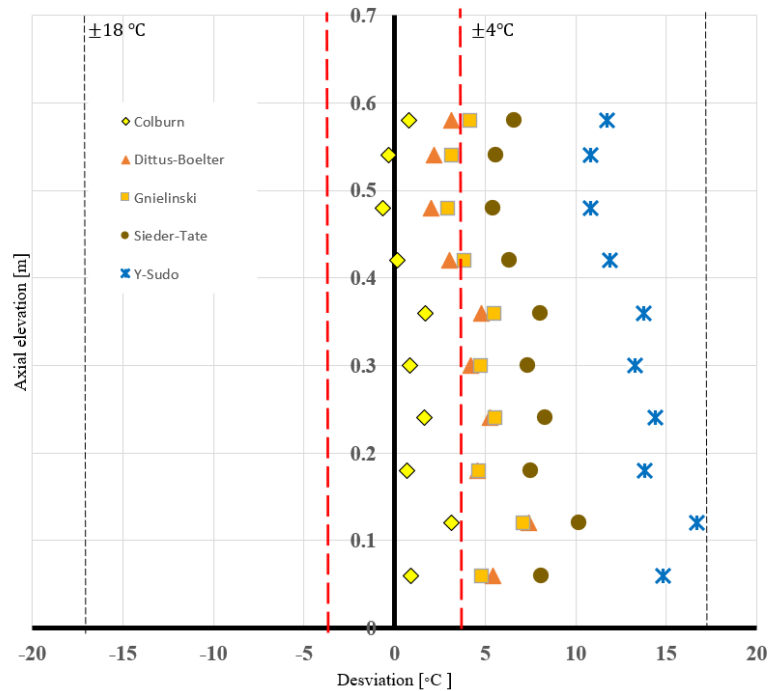


Fig. 10. Comparison of the deviation temperature using different correlations

## 6. Summary and Outlook

The SubChanFlow code has been extended for the thermo-hydraulic analysis of plate-type research reactors. The validation using data of the RA-6 test showed that SubChanFlow using the Colburn correlation predicts the thermal-hydraulic behaviour of the test with acceptable accuracy, the deviations being between  $\pm 4$  and  $\pm 18$  °C.



Additional validation will be performed using data obtained from other tests e.g. performed at the IEA-R1 reactor. Afterwards, the validated code version will be applied for the simulation of MTR-cores as stand-alone and coupled with the Monte Carlo code SERPENT2.

## Acknowledgment

The author is very grateful with the N.Sillin, A. Vertullo, V. Masson and R. Hilal, for their research activities relevant to experimental data RA-6 which are in the IAEA repository.

## Nomenclature

$A$ :	Subchannel flow area ( $m^2$ )
$C_k$	Heat conductivity in lateral direction ( $W/(mK)$ )
$C_p$	Specific heat ( $J/kgK$ )
$D_h$	Hydraulic diameter ( $m$ )
$e$	Direction of the lateral mixture
$f$	Single-phase friction coefficient (empirical correlation)
$f_T$	Factor for lateral turbulent momentum exchange
$g$	Gravity ( $m/s^2$ )
$h$	Specific mixture enthalpy ( $J/kg$ )
$h_{i,j}^*$	Enthalpy in axial direction
$h_{k,j}^*$	Enthalpy in gap
$K$	Axial pressure loss coefficient
$K_p$	Thermal conductivity for plate
$K_G$	Lateral gap pressure loss coefficient (empirical constant)
$l_k$	Distance of neighbouring subchannels
$m$	Mass flow rate axial cell boundary ( $kg/s$ )
$Nu$	Nusselt number
$p$	Pressure at axial cell boundary ( $Pa$ )
$\Delta p$	Pressure difference between neighbouring channels ( $Pa$ )
$Pr$	Prandtl number
$P_r$	Heater perimeter ( $m$ )
$\dot{q}$	Heat generation ( $W/m^3$ )
$q''$	Heat flux from fuel rod to coolant ( $W/m^2$ )
$q'$	Lineal fuel rod power ( $W/m$ )
$Re$	Reynolds number
$r_Q$	Total power directly deposited into the coolant
$S_k$	Gap width between two neighbouring ( $m$ )
$T$	Temperature ( $^{\circ}C$ )
$\Delta t$	Time step ( $s$ )
$v'^*$	Specific volume for the momentum transport
$w$	Linear mass flow rate through the gap ( $kg/(ms)$ )
$w'$	Turbulent cross-flow ( $kg/(ms)$ )
$\Delta X$	Length of axial cell ( $m$ )
$x$	Thickness of plate ( $m$ )
$\theta$	Angle of the subchannel in vertical direction
$\rho$	Density ( $kg/m^3$ )
$\Phi^2$	Two-phase friction multiplier (empirical correlation)
$i$	Channel $i$
$j$	Axial cell $j$
$k$	Gap $k$
$n$	Value at previous time step

## References

- [1] S. Chul-Hwa, "Some Issues and Challenges in Advanced Thermal-Hydraulic Safety Research," *Nuclear Technology*, vol. 196, no. 3, pp. 421-445, 2016.
- [2] M. Margulis and E. Gilad, "Development and Verification of the Dynamic System Code THERMO-T for Research Reactor Accident Analysis," *Nuclear Technology*, vol. 196, no. 2, pp. 377-397, 2016.
- [3] V. Koppers and M. K. Koch, "Heuristic methods in modelling research reactors for deterministic safety analysis," *Atw Internationale Zeitschrift fuer Kernenergie*, vol. 63, no. 8/9, pp. 464-468., 2018.
- [4] T. Hamidouche, A. Bousbia-Salah, M. Adorni and F. D'Auria, "Dynamic calculations of the IAEA safety MTR research reactor Benchmark problem using RELAP5/3.2 code," *Annals of Nuclear Energy*, vol. 31, no. 12, pp. 1385 - 1402, 2004.
- [5] A. Khedr, "Thermal-Hydraulic Analysis of Heated Plate under Asymmetrical Cooling Conditions," *Arab Journal of Nuclear Sciences and Applications*, vol. 46, no. 3, pp. 219-230, 2013.
- [6] D. A. Castellanos-Gonzalez, J. M. Moreira, J. R. Maiorino and P. Carajilescov, "Validation of the COTENP Code: A Steady-State Thermal-Hydraulic Analysis Code for Nuclear Reactors with Plate Type Fuel Assemblies," *Science and Technology of Nuclear Installations*, vol. 2018, 2018.
- [7] N. Sillin, A. Vertullo, V. Masson and R. Hilal, "Thermohydraulic calculations in rectangular channels for RA-6 type reactors with transition regime," 2009.
- [8] V. Masson, N. Silin, A. Azcona, D. Delmastro, J. C. Garcia and D. Mateos, "Experimental Investigation on the Heat Transfer Characteristics of a Minichannel in Transition Flow," *International Conference on Nuclear Engineering*, vol. 3, pp. 443-448, 05 2008.
- [9] U. Imke and V. H. Sanchez, "Validation of the Subchannel Code SUBCHANFLOW Using the NUPEC PWR Tests (PSBT)," *Science and Technology of Nuclear Installations*, vol. 2012, pp. 1687-6075, 2012.
- [10] D. Ferraro, V. Valtavirta , M. García, U. Imke , R. Tuominen, J. Leppänen and V. Sanchez-Espinoza, "OECD/NRC PWR MOX/UO<sub>2</sub> core transient benchmark pin-by-pin solutions using Serpent/SUBCHANFLOW," *Annals of Nuclear Energy*, vol. 147, p. 107745, 2020.
- [11] J. R. Basualdo, V. Sánchez-Espinoza, R. Stieglitz and J. R. Macián, "Integration of the subchannel thermal-hydraulic code SubChanFlow into the reactor dynamics code PARCS: Development and testing based on a computational benchmark," *Progress in Nuclear Energy*, vol. 119, p. 103138, 2020.
- [12] A. Kaushik , "Numerical Study of a Steady State Two-Dimensional Heat equation using TDMA Technique," *International Journal of Scientific Research in Mathematical and Statistical Sciences*, vol. 4, no. 1, pp. 6-11, 2017.
- [13] W. R. Gambill and R. D. Bundy, "HFIR Heat-Transfer Studies of Turbulent Water Flow in Thin Rectangular Channels," 1961.
- [14] D. Spurgeon, "Preliminary design studies for a high flux MIT reactor," Massachusetts Institute of Technology, Massachusetts, 1969.
- [15] Y. Sudo, K. Miyata, H. Ikawa and M. Kaminaga, "Experimental Study of Differences in Single-Phase Forced-Convection Heat Transfer Characteristics between Upflow and Downflow for Narrow Rectangular Channel," *Journal of Nuclear Science and Technology*, vol. 22, pp. 202-212, 1985.
- [16] Y. Sudo, M. Kaminaga and K. Minazoe, "Experimental study on the effects of channel gap size on mixed convection heat transfer characteristics in vertical rectangular channels heated from both sides," *Nuclear Engineering and Design*, vol. 120, pp. 135-146, 1990.
- [17] I. T. Bodey, "Thermal Hydraulic Characteristics of Fuel Defects in Plate Type Nuclear Research Reactors," 2014.
- [18] L. Li and Z. Zhang , "Development of Real-Time Thermal-Hydraulic Analysis Code for Plate Type Fuel Reactor," *ASME*, 2010.