

# Stochastic Optimization of Trading Strategies in Sequential Electricity Markets

Emil Kraft, IIP, KIT


Marianna Russo, Norwegian University of Science and Technology (NTNU), Trondheim, Norway

Dogan Keles, Technical University of Denmark (DTU), Lyngby, Denmark

Valentin Bertsch, Ruhr-University Bochum, Bochum, Germany

No. 58 | June 2021

WORKING PAPER SERIES IN PRODUCTION AND ENERGY

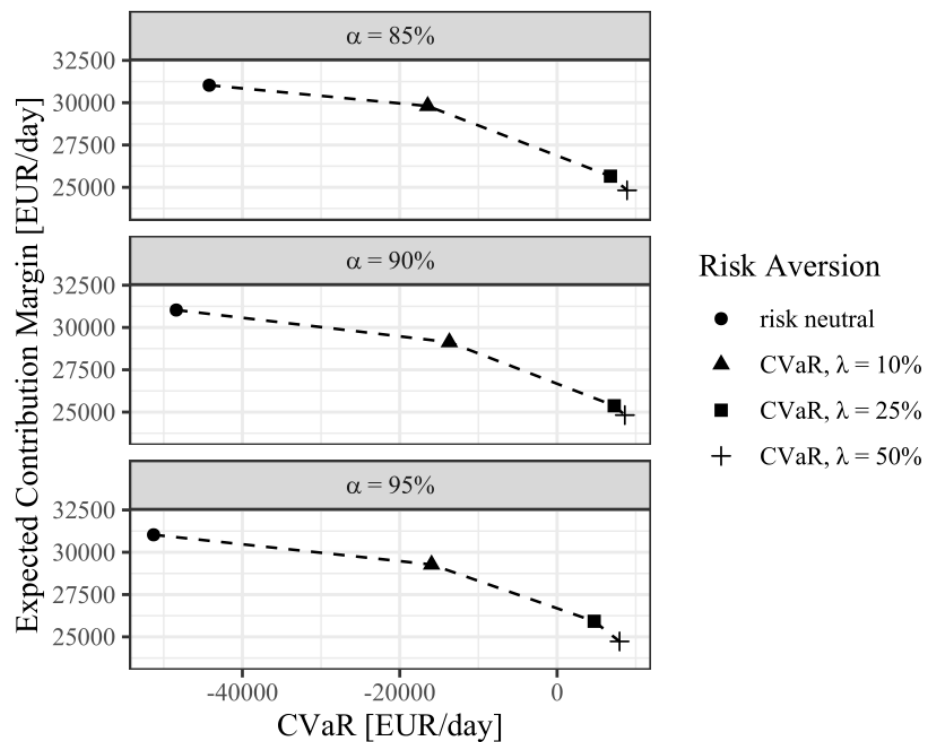

# Stochastic Optimization of Trading Strategies in Sequential Electricity Markets

Emil Kraft<sup>1</sup>, Marianna Russo, Dogan Keles, and Valentin Bertsch

<sup>1</sup>Contact:

Chair of Energy Economics, Institute for Industrial Production (IIP) at the Karlsruhe Institute of Technology (KIT),  
Hertzstr. 16, Geb. 06.33, 76187 Karlsruhe,  
emil.kraft@kit.edu; +49 721 608 44562

## Abstract

Quantity and price risks determine key uncertainties market participants face in electricity markets with increased volatility, for instance due to high shares of renewables. In the time from day-ahead until real-time, there lies a large variation in best available information, such as between forecasts and realizations of uncertain parameters like renewable feed-in and electricity prices. This uncertainty reflects on both the market outcomes and the quantity of renewable generation, making the determination of sound trading strategies across different market segments a complex task. The scope of the paper is to optimize day-ahead and intraday trading decisions jointly for a portfolio with controllable and volatile renewable generation under consideration of risk. We include a reserve market, a day-ahead market and an intraday market in stochastic modeling and develop a multi-stage stochastic Mixed Integer Linear Program. We assess the profitability as well as the risk exposure, quantified by the conditional value at risk metric, of trading strategies following different risk preferences. We conclude that a risk-neutral trader mainly relies on the opportunity of higher expected profits in intraday trading, whereas risk can be hedged effectively by trading on the day-ahead. Finally, we show that reserve market participation implies various rationales, including the relation of expected reserve prices among each other, the relation of expected reserve prices to spot market prices, as well as the relation of the spot market prices among each other.

# Stochastic Optimization of Trading Strategies in Sequential Electricity Markets

Emil Kraft<sup>\*,a</sup>, Marianna Russo<sup>b</sup>, Dogan Keles<sup>c</sup>, and Valentin Bertsch<sup>d</sup>

<sup>a</sup>Karlsruhe Institute of Technology, Chair of Energy Economics, Hertzstraße 16, D-76187 Karlsruhe

<sup>b</sup>NTNU Business School, Trondheim, Norway

<sup>c</sup>Technical University of Denmark (DTU), Department of Technology, Management and Economics, Lyngby, Denmark

<sup>d</sup>Chair of Energy Systems and Energy Economics, Ruhr-University Bochum, Bochum, Germany

June 23, 2021

## Abstract

Quantity and price risks determine key uncertainties market participants face in electricity markets with increased volatility, for instance due to high shares of renewables. In the time from day-ahead until real-time, there lies a large variation in best available information, such as between forecasts and realizations of uncertain parameters like renewable feed-in and electricity prices. This uncertainty reflects on both the market outcomes and the quantity of renewable generation, making the determination of sound trading strategies across different market segments a complex task.

The scope of the paper is to optimize day-ahead and intraday trading decisions jointly for a portfolio with controllable and volatile renewable generation under consideration of risk. We include a reserve market, a day-ahead market and an intraday market in stochastic modeling and develop a multi-stage stochastic Mixed Integer Linear Program. We assess the profitability as well as the risk exposure, quantified by the conditional value at risk metric, of trading strategies following different risk preferences. We conclude that a risk-neutral trader mainly relies on the opportunity of higher expected profits in intraday trading, whereas risk can be hedged effectively by trading on the day-ahead. Finally, we show that reserve market participation implies various rationales, including the relation of expected reserve prices among each other, the relation of expected reserve prices to spot market prices, as well as the relation of the spot market prices among each other.

**Keywords:** OR in energy, Electricity markets, Multi-stage stochastic programming, Uncertainty modeling, Risk modeling.

---

\*Corresponding author. E-mail: emil.kraft@kit.edu.

Acknowledgments. The authors acknowledge the financial support of the German Federal Ministry of Education and Research under grant number 03SFK1F0-2 (ENSURE – Neue Energienetzstrukturen für die Energiewende) and of the German Federal Ministry for Economic Affairs and Energy under grant number 03SIN120 (C/sells, in the scope of the SINTEG programme). This work has emanated from Marianna Russo's research time at the Economic and Social Research Institute, Dublin. Marianna Russo acknowledges funding from the ESRI's Energy Policy Research Center and the SFI Energy Systems Integration Partnership Programme (ESIPP) number SFI/15/SPP/E3125. The opinions, findings and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the Energy Policy Research Center and Science Foundation Ireland. All errors remain our own.

# 1 Introduction

With increasing uncertainties in the energy system in recent years, reserve and spot electricity markets have been moving towards higher granularity and trading decision times appear to move more and more to the short-term and even close to real-time. The increasing shares of weather-dependent volatile renewable generation and the introduction of intraday markets imply many changes in the design of short-term markets, but also in the trading rationales in sequential market structures and the risk exposure of individual market participants. The complexity of trading decisions leads to myriads of possible strategies to bring the flexibility and energy of a power plant portfolio profitably to the electricity markets. Hereby, not only the market segments themselves are subject to uncertainty, but also the relationship and interplay of the market segments need to be considered when deriving trading decisions. Another aspect that is relevant in the course of the energy transition is the actor structure in the energy sector. As more and more small market participants enter the market, that are sensitive to risk but unable to develop sophisticated methods, the demand for insights and approaches to determine sound trading strategies for all market segments increases.

As of today, trading decisions are typically determined with the help of deterministic programming approaches, basic stochastic considerations as well as the gut feeling of traders, and do not consider all market segments as a whole. In the literature, there are several studies that highlight the need to consider different market segments and associated uncertainties in thorough (Boomsma, Juul and Fleten, 2014; Möst and Keles, 2010, e.g.). Yet, due to rising shares of renewables from different sources and market adaptations the relationship and interplay of uncertainties and market prices has become more complex and continues to do so. This requires to extend existing modeling approaches, that consider one or a few sources of uncertainty independently from each other, by including the conditional relations of uncertainties of the relevant parameters, too. (Russo, Kraft, Bertsch and Keles, 2021)

With the proposed approach, we are able to model the uncertainty of the main drivers of power plant portfolios economics at different points in time and to determine sound trading strategies under uncertainty that also take into account the associated risk exposure and attitude. We model the relevant quantity and price risks from the morning of the day ahead until the gate closure of intraday trading and include all key characteristics of the reserve market, the day-ahead spot market as well as the intraday spot market. To estimate and apply the developed models, we provide a case study for the German electricity market design and a renewable generation portfolio consisting of volatile and controllable units.

The results consist on the one hand in a transparent assessment of the expected profits and risks under different trading strategies. In this study, besides the expected value we include risk metrics such as the conditional value at risk into decision-making, as introduced in Conejo, Carrión and Morales (2010). We present efficient frontiers and profit distributions associated with optimal trading decisions. On the other hand, we derive and discuss valuable insights on trading rationales both within and across the market segments. Like that, we provide not only an innovative application of stochastic programming to a complex real-world problem, but also interesting insights for scholars, traders, and ultimately policy makers designing markets for the energy transition.

The remainder of the paper is organized as follows: In Section 2, we discuss approaches in the literature to face the trading problem with stochastic optimization and further specify the research gap. Section 3

presents the considered sequential market setting and key characteristics of the single market segments. In Section 4, we describe the trading problem and develop a methodology to derive optimal trading strategies based on a multi-stage stochastic mixed-integer linear problem. Further, Section 4 includes the stochastic modelling of uncertainties that serves as input for the trading problem. Section 5 applies the developed approach to the case of a power plant portfolio in the German market and discusses results and underlying trading rationales. Finally, Section 6 summarizes the main conclusions for different stakeholder groups and provides an outlook to future developments and applications.

## 2 Literature Review and Research Gap

Decisions in energy economics are often categorized into strategic (i.e., mostly investment) and operational or short-term decisions. This paper sets a clear focus on short-term decisions. Optimization approaches to provide decision support for short-term decisions of actors in energy economics can be further distinguished into the optimal use of the technical units and the optimal interaction with revenue streams, i.e. the markets for flexibility and energy. As this paper focuses on the European setting of a self-dispatch system with balancing responsible parties (BRP), we will not address ISO optimization approaches, which are deployed mainly in the US (e.g., CAISO in California). We are focusing on approaches from the perspective of individuals.

In the literature, the two short-term optimization problems that are relevant for this paper are, the optimal dispatch problem or unit commitment problem for a power plant portfolio, and the optimal trading problem. However, in most cases these two cannot be separated strictly from each other. Whereas the first describes the problem of delivering a defined schedule of energy or providing a defined flexibility on activation request at minimal cost, the second enhances the scope by taking into account the (expected) market outcomes and optimizing the bids, which lead to the profit-maximizing operation. As the objective function is defined to maximize the contribution margins and as the market commitments are not known *ex ante*, the unit commitment problem is not modeled explicitly but implicitly. Whereas unit commitment rather focuses on technical constraints of the plant or the plant portfolio, the trading problem rather addresses the market operations in more detail.

Obviously, there are many previous works considering the deterministic unit commitment and trading problem. Typically, although technical constraints are non-linear in reality (e.g. efficiency for partial load), the problem is formulated as a Mixed-Integer Linear Program (MILP) to keep the problem mathematically tractable with standard solvers. However, deterministic approaches fail to address for increasing uncertainty and to depict the risk, even more so with rising shares of weather-dependent renewable generation and uncertain market prices. We therefore focus on approaches of stochastic programming. For handling uncertainty, the main stochastic optimization approaches include exact solution methods and approximation techniques (see, e.g., Birge and Louveaux, 2011, for an overview). Zheng, Wang and Liu (2015) provide a review of stochastic optimization approaches for the unit commitment problem and distinguish between stochastic programming, robust programming and (approximate) stochastic dynamic programming. For the literature overview to remain concise, at this point we focus on works that apply stochastic programming approaches to electricity market bidding in sequential market settings and refer to Möst and Keles (2010), Klaboe and Fosso (2013), and Zheng et al. (2015) for more thorough reviews of stochastic modelling in energy economics. Fleten and Kristoffersen (2007) deploy stochastic programming to determine optimal bidding strategies

for hydropower plants with a cascade structure. Boomsma et al. (2014) model coordinated bidding in electricity spot and balancing power markets in the Nordic market design with the help of a multi-stage stochastic program and compare the risk exposure of different bidding strategies. Ottesen, Tomaszgard and Fleten (2018) deploy a multi-stage stochastic program to derive an optimal trading strategy for a portfolio of demand side management units in three market segments: Starting with an option market that is cleared for an entire week, followed by a daily spot market and an hourly flexibility market, the trader faces three possible revenue streams with uncertain prices as in the Nordic market design. Klæboe, Braathen, Eriksrud and Fleten (2019) continue the investigation of coordinated bidding strategies for hydropower plants in the Nordic market with a similar multi-stage stochastic approach.

Plazas, Conejo and Prieto (2005) deploy the case of the Spanish market design to investigate bidding strategies in three market segments of the electricity, aiming at maximizing the expected profit. Pandžić, Morales, Conejo and Kuzle (2013) formulate a multi-stage stochastic problem for offering and operating a virtual power plant in a market setting with spot and balancing market. For the perspective of the operator of a local energy market, Laur, Nieto-Martin, Bunn and Vicente-Pastor (2018) present a multi-stage stochastic approach to procure flexibility services in distribution network and discuss risk implications.

This paper stands in line and pursues similar ideas with the presented papers, although we face a significantly different problem structure. The existing studies do not match the structure of short-term electricity markets and all their relevant design elements that we observe in a real-world market setting as presented in Section 3. For this reason, the study fills this gap by presenting a comprehensive problem description for the trading decisions of a portfolio manager with volatile and controllable renewables and applies it to the case of the German market design. Furthermore, we cover the entire market risk and uncertainties such a portfolio faces in the operations on the short-term markets.

We address these by considering a multi-stage stochastic approach for trading in sequential markets including different temporal resolutions, pay-as-bid and uniform pricing, and high uncertainty of prices and volumes stemming from various sources. The German balancing reserve market in particular is known for hardly explainable prices, supposedly due to a high market concentration. In the past, the design of and actor structure in the reserve markets often led to undesirable and noncompetitive results. Therefore it has been adapted several times in recent years. Several studies deal with these issues and present implications for the development of the market (Ocker and Ehrhart, 2017; Kraft, Keles and Fichtner, 2018, see, e.g.). We refer to Ocker, Ehrhart and Ott (2018) and Kraft, Ocker, Keles and Fichtner (2019) for in-depth analyses of incentives and game-theoretical discussions of the market design.

Further, the need to consider a stochastic approach for trading in sequential markets becomes increasingly important in contexts with rising shares of renewables and increasing uncertainty in spot markets. Forecast errors on the day-ahead are unavoidable and lead to significant price and quantity risks for any market participant. Addressing these adequately in the decision process requires a thorough analysis and modeling of the stochastics and consequently an approach that considers all aspects, the uncertainty and the technical and market constraints. With the approach presented in this paper, we aim at filling this gap in the existing literature.

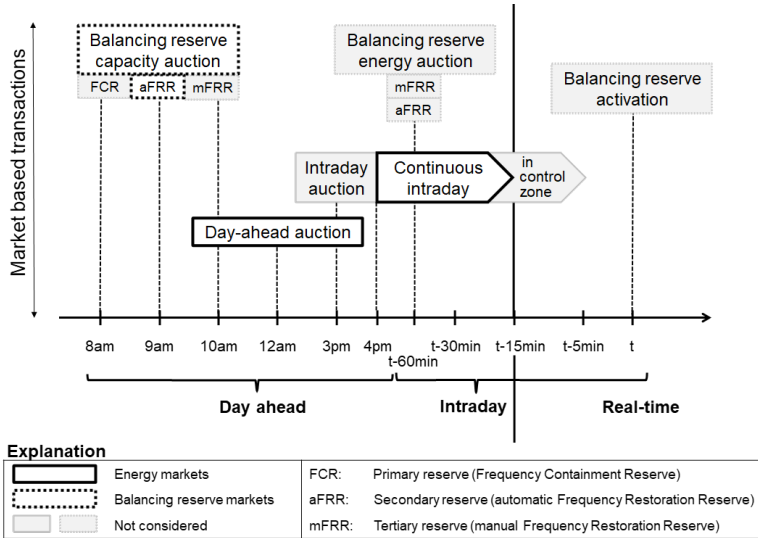


Figure 1: Sequence of markets for electricity and flexibility with gate-closure times in the German market design from November 2020 on. The considered market segments reserve ("aFRR capacity auction"), day-ahead spot market ("Day-ahead auction") and intraday spot market ("Continuous intraday") are marked with the red boxes.

### 3 Market Description

In European power markets, the products relevant for a power plant portfolio trader can be distinguished into the mere delivery of electricity and the provision of reserve power for the transmission system operator (TSO) to balance the system. Whereas the former is organized in large electricity exchanges and the market design has been harmonized internationally to a large extent, the latter is still organized in distinct national designs. Rising shares of generation by renewable energy sources (RES) led to an increasing relevance of close-to-realtime decisions. This applies not only for reserve products that are procured with shorter lead times, but particularly for the interplay of day-ahead and intraday spot market operations.

The setting that is studied in this paper includes a balancing reserve power market with separate products for positive and negative direction, a day-ahead electricity market, and an intraday electricity market. This threefold organization is typical for European power markets and can be found with small variations in many countries. With regard to the balancing reserve, we focus on the secondary reserve market (i.e., automatic Frequency Restoration Reserve, aFRR) with its lead times and product requirements, the segments for primary and tertiary reserve are left out in this market description to remain concise. For better readability, the term "reserve" is used synonymously with secondary reserve and aFRR in the following. Figure 1 provides an overview over a typical market sequence until real-time and highlights the market segments relevant for this study. To substantiate the products and lead times in a concrete case, we choose the market design setting of Germany. The procurement of reserve products by the TSOs in Germany is organized in a two-stage procedure. The first stage, the so-called capacity market auction for the day ahead, takes place prior to the day-ahead spot market at 9 am and determines the reserve providers for the following day. In this auction, the prequalified reserve providers can place bids consisting of the capacity price (in EUR/MW) and a volume (in MW). Providers are allowed to submit several distinct bids. The 24 hours of the day are split into six time slices consisting of four hours each (0-4, 4-8, ..., 20-24). Further, reserves for the negative (downward

regulation) and the positive (upward regulation) direction are auctioned as separate products. This leads to twelve distinct aFRR auctions each day, which are remunerated according to pay-as-bid pricing. In the second step of reserve procurement, the so-called aFRR energy market auction takes place during the day 45 minutes before the gate closure time of the intraday market, and determines the prices and merit order of activation. The successful bid in the capacity market obliges the trader to trade in the reserve energy market, however also free energy bids are allowed. For the scope of this paper, the aFRR energy market is left out for two reasons. First, the energy price bid can only lead to positive contribution margins if above the variable costs of provision and therefore poses no risk of losses to the portfolio profit. Second and most important, the bid into the energy market can be considered independently from the other trading decisions. For it is rather a complementing element than an opportunity, the aFRR energy market can be neglected.

After the aFRR capacity market, at 12 am the day-ahead spot market auction takes place, in which energy delivery for the next day is traded in hourly resolution with uniform pricing. Subsequently, at 3 pm the intraday auction takes place, in which energy can be traded in quarter-hourly resolution. The intraday market is then open for continuous trading of energy in quarter-hourly products until 30 minutes before delivery<sup>1</sup>. To cope with the temporal structure of the rolling gate closure times and respective 96 arrival processes of prices of continuous intraday trading, we require a simplification. In accordance with Ottesen et al. (2018) and Laur et al. (2018) the intraday market is approximated with one hypothetical auction, with the index price ID3 of the trades completed in the last three hours (denoted with  $p^{\text{ID3}}$ ) as representative price for each quarter hour. As  $p^{\text{ID3}}$  averages completed trades, we handle the hypothetical auction as a uniform pricing auction. This corresponds to modeling the intraday trading as one hypothetical auction with rolling gate closures 30 minutes before the respective delivery. Note that this simplification neglects profit from potential re-positioning in reaction to the volatility of the continuous price process during intraday trading. Further, we assume that the trader acts as a price-taker and is always able to find a counterparty to sell electricity for the  $p^{\text{ID3}}$  price. With regard to low liquidity this would have been a very strong assumption in the early years of intraday trading. In the meanwhile, however, intraday trading has become sufficiently liquid. For the relatively small trading volumes related to the investigated portfolio and as the scope of the paper is particularly to determine optimal trading strategies on the day ahead, the assumption is considered well reasonable.

In conclusion, the trader faces three markets to be considered: The aFRR capacity market with six four-hour products, the day ahead market with 24 hourly products and the intraday market with 96 quarter-hourly products. Considering both the price uncertainty of the three markets and the volume uncertainty of the renewable generation, the trader faces a complex decision problem with numerous decision variables.

---

<sup>1</sup>Note, that half-hour and hour products are also traded in the intraday market. However, as the 15 minute product is the best approximation for the value of the 15 minutes period if contained within a product with larger resolution, including further product resolutions for intraday trading would not essentially change the trading strategies but result in substitution trades. We do not aspire to optimize for trades across intraday products, but for trading strategies across the considered decision stages. Therefore, this paper focuses on the 15 minute products alone.



Table 1: Overview over information available to the optimization as deterministic or realized information and as stochastic information in form of scenarios.

	Deterministic / realized	Stochastic
Stage 1	<i>deterministic</i> : Expected value RES generation forecast, technical constraints, market constraints	<i>scenarios i</i> : Marginal reserve prices for negative and positive direction
Stage 2	<i>scenarios i</i> : Reserve market result and commitment	<i>scenarios j</i> : Day-ahead RES generation forecast, day-ahead market prices
Stage 3	<i>scenarios j</i> : Day-ahead market result and commitment, day-ahead RES generation forecast	<i>scenarios k</i> : Intraday update RES generation forecast, intraday market prices

## 4 Methodology

The methodology presented in the following subdivides into the formulation of the optimization problem and the generation of input data by means of stochastic modeling. The optimization is formulated as a mixed-integer linear multi-stage stochastic problem. First, the formulation for a risk-neutral trader is presented. Second, the formulation is extended to a problem that allows for consideration risk-aversion of the trader. After the constraints the optimization is subject to are presented, we finally introduce the modeling and characterization of uncertainties considered in the problem.

### 4.1 The Trading Problem

For the bidder, the determination of the optimal bids implies both price risks and a quantity risks. The information available to the trader in the optimization problem is summarized in Table 1. Information like the residual load forecast and its updates are not explicitly provided to the problem, but are contained in the price processes as described above. Note further, that logically the stochastic information on later stages is implicitly considered in the decisions of the early stages. The structure of the decisions on the three stages will be explained in more detail in Section 4.2.

### 4.2 Target Function

We formulate the target for the risk-neutral problem straight forward as maximization of expected contribution margins  $\pi$  throughout the scenarios  $(i, j, k)$  in  $\Omega$  in all market segments and time steps as the revenues ( $\rho$ ) minus the costs ( $\kappa$ ).

$$\max \mathbb{E}_{(i,j,k) \in \Omega}(\pi_{i,j,k}) = \mathbb{E}_{(i,j,k) \in \Omega}(\rho_{i,j,k}) - \mathbb{E}_{(i,j,k) \in \Omega}(\kappa_{i,j,k}) \quad (1)$$

with the expected revenues  $\rho$  being the sum of reserve (aFRRpos and aFRRneg) market, day-ahead (DA) market and intraday (ID) market revenues.

$$\mathbb{E}_{(i,j,k) \in \Omega}(\rho_{i,j,k}) = \mathbb{E}_{(i) \in \Omega}(\rho_i^{\text{aFRRpos}}) + \mathbb{E}_{(i) \in \Omega}(\rho_i^{\text{aFRRneg}}) + \mathbb{E}_{(i,j) \in \Omega}(\rho_{i,j}^{\text{DA}}) + \mathbb{E}_{(i,j,k) \in \Omega}(\rho_{i,j,k}^{\text{ID}}) \quad (2)$$

One key challenge in the formulation of the trading problem consists in addressing the reserve market design with its particularities. As pay-as-bid pricing intuitively comes with both the price and the volume as decision variables, an alternative formulation must be deployed for the problem to remain a mixed-integer linear problem (MILP). However, the modelling of uncertainty yields discrete values for reserve prices for positive and negative direction ( $LP$  and  $LN$ , respectively) for each reserve price scenario  $i$ . We therefore define these price levels  $p_{lp}^{\text{aFRRpos}}$  ( $p_{ln}^{\text{aFRRneg}}$ ) as fixed bidding levels and define only the bid volume  $x_{lp,i,ts}^{\text{aFRRpos,bid}}$  ( $x_{ln,i,ts}^{\text{aFRRneg,bid}}$ ) on price level  $lp$  ( $ln$ ) as decision variable for positive (negative) reserve market bidding. In this way, we define a bidding curve with volumes on several price levels to be submitted to each segment of the reserve market.

As we model the uncertainty with a discrete probability space, the trader has no incentive to bid on price levels distinct from the given scenario prices. The eventual acceptance of a bid on price level  $lp \in LP$  for the positive reserve product (or on price level  $ln \in LN$  for negative reserve) in time slice  $ts$  and scenario  $i$  is modelled with the help of the binary acceptance parameters  $\beta_{lp,i,ts}^{\text{aFRRpos}}$  and  $\beta_{ln,i,ts}^{\text{aFRRneg}}$ , that translate the marginal prices into acceptance or decline of a bid as described in Equation (51). The resulting expected revenues from the positive reserve market over all time steps and scenarios are then defined as (negative follows analogously):

$$\mathbb{E}_{(i) \in \Omega}(\rho_i^{\text{aFRRpos}}) = \sum_{i=1}^I pr_i \sum_{ts=1}^{TS} \sum_{lp=1}^{LP} \left( \beta_{lp,i,ts}^{\text{pos}} \cdot p_{lp}^{\text{aFRRpos}} \cdot x_{lp,i,ts}^{\text{aFRRpos}} \right) \quad (3)$$

$pr_i$ ,  $pr_j$ ,  $pr_k$  denote scenario probabilities for  $i \in I$ ,  $j \in J$ , and  $k \in K$ , as described in 4.7. Note, that this formulation takes into account the reserve market to be cleared according to pay-as-bid pricing and the spot market segments according to uniform pricing. The considered price for an accepted bid  $p_{lp}^{\text{aFRRpos}}$  is therefore indexed with the respective price level and reflects the pay-as-bid pricing.

In contrast, the day-ahead and intraday market are cleared with uniform pricing<sup>2</sup>. Hereby,  $p_{j,h}^{\text{DA}}$ ,  $p_{i,j,k,qh}^{\text{ID}}$  denote the prices on the day-ahead and intraday market for the different time steps and scenarios, respectively. The expected revenues on the day-ahead market are defined as the trading volume  $x_{i,j,h}^{\text{DA,trade}}$  multiplied by the uniform price  $p_{j,h}^{\text{DA}}$  in scenario  $j$ , summed up over all hours.

$$\mathbb{E}_{(i,j) \in \Omega}(\rho_{i,j}^{\text{DA}}) = \sum_{i=1}^I pr_i \sum_{j=1}^J pr_j \sum_{h=1}^H p_{j,h}^{\text{DA}} \cdot x_{i,j,h}^{\text{DA,trade}} \quad (4)$$

The day-ahead market is modelled such that the trader submits a bid curve to the market, consisting of volume bids on defined fixed price levels  $lda$ . For the evaluation of bidding strategies, we distinguish between bids to sell generation,  $x_{i,j,h}^{\text{DA,gen,bid}}$ , bids to take a short position (i.e., selling more than is expected to be generated),  $x_{i,j,h}^{\text{DA,short,bid}}$ , and bids to take a long position (i.e., buying electricity on the day-ahead market),  $x_{i,j,h}^{\text{DA,long,bid}}$ .

Again, there is no incentive to deviate from the market prices contained in the scenarios  $j$  for the day-ahead market decision stage. With the help of the binary parameter  $\beta_{lda,j,h}^{\text{DA}}$ , denoting the accepted price levels  $lda$  of day-ahead market bids for selling electricity in hour  $h$  and scenario  $j$ , the traded volume is defined as follows. We stress at this point that the trader does not only have the option

<sup>2</sup>As described in Section 3, we model the intraday auction as an uniform pricing auction with the ID3 price as clearing price.

of purely selling the generation, but also to prepare a good position for potential intraday trading. Thus, both building a short position that exceeds the expected generation and going long (i.e., buying electricity to sell it later and profit from rising prices) is within the trader's action space. The bids to take a long position in the day-ahead market (i.e., buying electricity) have the opposite acceptance structure of selling bids  $(1 - \beta_{lda,j,h}^{DA})^3$ .

$$x_{i,j,h}^{DA,trade} = x_{i,j,h}^{DA,gen,trade} + x_{i,j,h}^{DA,short,trade} - x_{i,j,h}^{DA,long,trade} \quad (5)$$

with

$$x_{i,j,h}^{DA,gen,trade} = \sum_{lda=1}^{LDA} \beta_{lda,j,h}^{DA} \cdot x_{lda,i,j,h}^{DA,gen,bid} \quad (6)$$

$$x_{i,j,h}^{DA,short,trade} = \sum_{lda=1}^{LDA} \beta_{lda,j,h}^{DA} \cdot x_{lda,i,j,h}^{DA,short,bid} \quad (7)$$

$$x_{i,j,h}^{DA,long,trade} = \sum_{lda=1}^{LDA} (1 - \beta_{lda,j,h}^{DA}) \cdot x_{lda,i,j,h}^{DA,long,bid} \quad (8)$$

However, the long and the short position of the portfolio are constrained to the extent allowed in BRP contracts as will be presented in Equations (23) and (24). The revenues from the intraday market are defined analogously. The factor  $\Delta t$  captures the difference in temporal resolution between hour  $h$  and quarter hour  $qh$  (i.e.  $\Delta t = 0.25$ ), so that the energy amount equals the integral of the power output.

$$\mathbb{E}_{(i,j,k) \in \Omega}(\rho_{i,j,k}^{ID}) = \sum_{i=1}^I pr_i \sum_{j=1}^J pr_j \sum_{k=1}^K pr_k \sum_{qh=1}^{QH} p_{j,k,qh}^{ID} \cdot x_{i,j,k,qh}^{ID,trade} \cdot \Delta t \quad (9)$$

The realized intraday trades,  $x_{i,j,k,qh}^{ID,trade}$ , are defined by (10), the intraday trade summands are defined analogously as for the day-ahead market in (6)-(8).

$$x_{i,j,k,qh}^{ID,trade} = x_{i,j,k,qh}^{ID,gen,trade} + x_{i,j,k,qh}^{ID,short,trade} - x_{i,j,k,qh}^{ID,long,trade} \quad (10)$$

The expected costs occurring in each market segment sum up to the total costs. To account for potential active schedule violations in a future application, the term  $\kappa_{i,j,k}^{Imb}$  completes the formulation of the trading problem.

$$\mathbb{E}_{(i,j,k) \in \Omega}(\kappa_{i,j,k}) = \mathbb{E}_{(i) \in \Omega}(\kappa_i^{aFRRpos}) + \mathbb{E}_{(i) \in \Omega}(\kappa_i^{aFRRneg}) + \mathbb{E}_{(i,j) \in \Omega}(\kappa_{i,j}^{DA}) + \mathbb{E}_{(i,j,k) \in \Omega}(\kappa_{i,j,k}^{ID}) + \mathbb{E}_{(i,j,k) \in \Omega}(\kappa_{i,j,k}^{Imb}) \quad (11)$$

The pure provision of capacity is valued at no costs. For positive reserve (aFRRpos), the reserve activation may lead to additional fuel consumption and thus additional variable costs. On the other hand, an activation of negative reserve (aFRRneg) may lead to fuel savings and thus a reduction of the costs arising from the spot market operation. However, the cost effects of potential reserve

<sup>3</sup>This formulation implies that in case  $p_{j,h}^{DA} = p_{lda,j,h}^{DA}$  a selling bid gets accepted at price level  $lda$ , whereas an ask bid is declined. A successful ask bid must be at least one price level above, despite being valued with price level  $lda$ . We thereby reflect a certain bid-ask spread and avoid opposite bids that cancel each other out and only inflate trading volumes.

activation can be easily addressed by appropriate energy bids. As the costs of a potential positive reserve activation are independent from the bidding decision on the reserve power market, we consider it reasonable to value them at zero costs. The same applies for the negative reserve.

$$\mathbb{E}_{(i) \in \Omega}(\kappa_i^{\text{aFRRpos}}) = 0 \quad (12)$$

The activation of reserves is not further considered in this paper. The only assumption that needs to be made is that the energy to meet the activation is available for the controllable plants  $u$ . The costs for the day-ahead market operation consist of variable costs for the controllable plant  $u$  and the renewable source  $res$ . The costs for a potential long position are already accounted for in the revenues in Equation (4) and (9).

$$\mathbb{E}_{(i,j) \in \Omega}(\kappa_{i,j}^{\text{DA}}) = \sum_{i=1}^I pr_i \sum_{j=1}^J pr_j \sum_{h=1}^H \left( \sum_{u=1}^U \kappa_u^{\text{var}} \cdot x_{i,j,u,h}^{\text{DA,dispatch,U}} + \sum_{res=1}^{RES} \kappa_{res}^{\text{var}} \cdot x_{i,j,res,h}^{\text{DA,dispatch,RES}} \right) \quad (13)$$

$\kappa_u^{\text{var}}$  denotes the variable cost of unit  $u$ ,  $x_{i,j,u,h}^{\text{DA,dispatch,U}}$  denotes the energy dispatched (i.e., sold with  $x_{lda,i,j,h}^{\text{DA,gen,bid}}$ ) from unit  $u$  on the day-ahead market. The dispatch for renewable source  $res$  is defined analogously.

$$\mathbb{E}_{(i,j,k) \in \Omega}(\kappa_{i,j,k}^{\text{ID}}) = \sum_{i=1}^I pr_i \sum_{j=1}^J pr_j \sum_{k=1}^K pr_k \sum_{qh=1}^{QH} \left( \sum_{u=1}^U c_u^{\text{var}} \cdot x_{i,j,k,u,qh}^{\text{ID,dispatch,U}} + \sum_{res=1}^{RES} c_{res}^{\text{var}} \cdot x_{i,j,k,res,qh}^{\text{ID,dispatch,RES}} \right) \cdot \Delta t \quad (14)$$

$$\mathbb{E}_{(i,j,k) \in \Omega}(\kappa_{i,j,k}^{\text{Imb}}) = \sum_{i=1}^I pr_i \sum_{j=1}^J pr_j \sum_{k=1}^K pr_k \sum_{qh=1}^{QH} (x_{i,j,k,qh}^{\text{imb,+}} + x_{i,j,k,qh}^{\text{imb,-}}) \cdot p_{qh}^{\text{imb}} \cdot \Delta t \quad (15)$$

with the absolute value of the energy imbalance  $x_{i,j,k,qh}^{\text{imb}}$  denoted by the sum of the positive and negative share ( $x_{i,j,k,qh}^{\text{imb,+}} + x_{i,j,k,qh}^{\text{imb,-}}$ ) valued with the imbalance price  $p_{qh}^{\text{imb}}$ .<sup>4</sup> Logically, the imbalance can only either be positive or negative, which is reflected by the constraints (21) and (22) in Section 4.5.

### 4.3 Consideration of Risk

A major advantage of the stochastic over the deterministic problem formulation consists in the ability of the presented approach to quantify and to take into account risks when determining the trading strategy. Based on theory provided in textbooks such as Conejo et al. (2010) and Birge and Louveaux (2011), we distinguish between risk-neutral decision making and decision making under consideration of risk. Whereas the risk-neutral decision is based solely on the expected value of the profits over all scenarios as presented in (1), a real-world trader most likely will also want to consider the risk exposure related with the trading decision. In order to determine trading decisions with less risk exposure, we therefore introduce risk to our approach. This enables us to make use of the characterization of

<sup>4</sup>As intentional imbalances are prohibited by the up-to-date German BRP contract,  $x_{i,j,k,qh}^{\text{imb}}$  is forced to equal zero with a sufficiently large number  $BIGM$  as  $p_{qh}^{\text{imb}}$ . In the presented case study  $BIGM$  equals 100,000 EUR/MWh. In the general formulation,  $p_{qh}^{\text{imb}}$  may be equipped with a close-to-real-time forecast to reflect an expected imbalance price (*reBAP*), if intentional imbalances want to be taken into account in future extensions of the model. However, this exceeds the scope of this paper.

uncertainty, which contains more information than a single figure, such as the expected value, can capture.

In finance literature, the risk exposure is quantified with the help of risk metrics. Commonly used metrics include the variance, the shortfall probability, the expected shortage and as well as value at risk (VaR) and conditional value at risk (CVaR, also referred to as average value at risk or expected shortfall) (Conejo et al., 2010). However, for the trading problem to remain scalable and flexible, the use of a coherent risk metric<sup>5</sup>, particularly one satisfying sub-additivity, is of practical use. As the CVaR meets the properties of coherence, we modify the problem formulation in order to include the CVaR into the target function (adaptation of Conejo et al. (2010)). Further details and the definition of the CVaR and the VaR are provided in Annex A.3.

#### 4.4 Modelling the Conditional Value at Risk

In adaption of Conejo et al. (2010) the target function is augmented by the variable  $\eta$ , that corresponds to the VaR, the parameter  $\alpha$  representing the probability level of the VaR and the non-negative continuous variable  $s_{i,j,k}$  defined by equation (17) to the maximum of the VaR  $\eta$  minus the contribution margin  $\pi_{i,j,k}$  in a scenario and zero. The optimization objective is now the weighted sum of expected value and the CVaR of the contribution margins throughout the scenarios, with  $\lambda \in (0, 1)$  as weight in the target function.  $\lambda$  can be referred to as parameter of risk aversion.

$$\max \quad (1 - \lambda) \cdot \mathbb{E}_{(i,j,k) \in \Omega}(\pi_{i,j,k}) + \lambda \cdot \left( \eta - \frac{1}{1 - \alpha} \sum_{i=1}^I pr_i \sum_{j=1}^J pr_j \sum_{k=1}^K pr_k \cdot s_{i,j,k} \right) \quad (16)$$

$$\eta - \pi_{i,j,k} \leq s_{i,j,k} \quad \forall (i, j, k) \in \Omega \quad (17)$$

$$s_{i,j,k} \geq 0 \quad \forall (i, j, k) \in \Omega \quad (18)$$

In the remainder of this paper, sets will be dropped from the notation to remain concise,  $\forall (i, j, k) \in \Omega$  is equivalent to  $\forall (i, j, k)$ ,  $\forall qh \in QH$  equivalent to  $\forall qh$ , and so on. The chosen multi-criteria formulation as weighted sum allows us to consider both the expected value of contribution margins and the CVaR at level  $\alpha$ . The parameters  $\lambda$  and  $\alpha$  will be used in the case study to distinguish between and evaluate different risk strategies. Further, for the interested reader we provide the problem formulation using the VaR as risk metric in Annex A.3.

#### 4.5 Constraints

Besides the aforementioned constraints for modelling the risk, we include constraints from three categories in the problem formulation that will be presented in the subsequent paragraphs. First, several constraints regarding the trading logic, the market design and the market rules need to be considered. Further, the operational constraints of the technical units in the portfolio to fulfill energy delivery and provide the reserve products need to be considered in modelling the trading decision. Hereby, we distinguish between the volatile renewable sources (RES), indexed with  $res$ , and controllable (renewable) units (e.g., a biogas power plant), indexed with  $u$ . The third category of constraints comprises

---

<sup>5</sup>Coherent risk metrics satisfy the conditions of monotonicity, sub-additivity, homogeneity, and translational invariance.

the stochastic programming constraints, in which we summarize the constraints required for the formulation of the multi-stage stochastic problem and further auxiliary constraints.

#### 4.5.1 Market Constraints

The energy balance over the two spot markets (i.e., day-ahead and intraday market) needs to be zero as short- or long-selling beyond the intraday market, i.e. speculating on imbalance prices lower or higher than spot market prices, is prohibited by the market rules. To give the trader the option to close its balance sheet and to deploy bidding strategies between the day-ahead and the intraday stage<sup>6</sup>, the short-selling variables comply with volumes sold but not dispatched in the respective stage and vice versa the long-selling variables comply with the generation volumes not sold or additional energy that is bought on the respective stage. Eventually, the energy schedule needs to be balanced for each  $qh$ . In the following,  $qh(h)$  denotes the mapping of the quarter hours contained in an hour to the respective hour  $h$  (e.g.,  $qh(1) = \{1, 2, 3, 4\}$ ). As mentioned earlier, the imbalances (split up in positive and negative part to be able capture the absolute value)  $x_{i,j,k,qh}^{\text{imb},+}$  and  $x_{i,j,k,qh}^{\text{imb},-}$  enter the target function as positive variables, penalized with BIGM, via equation (15) and are thus forced to equal zero.

$$x_{i,j,h}^{\text{DA,trade}} + x_{i,j,k,qh}^{\text{ID,trade}} + x_{i,j,k,qh}^{\text{imb}} = x_{i,j,h}^{\text{DA,gen,trade}} + x_{i,j,k,qh}^{\text{ID,gen,trade}} \quad \forall (i, j, k), h, qh(h) \quad (19)$$

with

$$x_{i,j,k,qh}^{\text{imb}} = x_{i,j,k,qh}^{\text{imb},+} - x_{i,j,k,qh}^{\text{imb},-} \quad \forall (i, j, k), h, qh(h) \quad (20)$$

For the absolute value consideration of the imbalance volume in (15), a *BIGM* formulation with the auxiliary binary  $\delta_{i,j,k,qh}^{\text{imb}}$  leads to the following equations to ensure that  $x_{i,j,k,qh}^{\text{imb},+}$  and  $x_{i,j,k,qh}^{\text{imb},-}$  are not greater than zero at the same time.

$$x_{i,j,k,qh}^{\text{imb},+} \leq \text{BIGM} \cdot \delta_{i,j,k,qh}^{\text{imb}} \quad \forall (i, j, k), qh \quad (21)$$

$$x_{i,j,k,qh}^{\text{imb},-} \leq \text{BIGM} \cdot (1 - \delta_{i,j,k,qh}^{\text{imb}}) \quad \forall (i, j, k), qh \quad (22)$$

Traders have incentives, if one spot market is dominating the other (e.g. price expectations for the intraday are favorable compared to the day-ahead market), to realize unlimited profit opportunities<sup>7</sup> of short and long trades between the markets. To account for the trades to be related to the portfolio and not to a purely speculative arbitrage strategy, we introduce volume limits for the short and long position related to the portfolio generation<sup>8</sup>. Equations (23) and (24) limit the short and the long trade volume in the day-ahead market. In consequence, the respective trade volumes are implicitly

<sup>6</sup>According to European Federation of Energy Traders (EFET), not bidding in the forward or day-ahead market in expectation of higher prices in the intraday markets is no capacity withholding and speculation about higher prices in consecutive markets is no market manipulation but a legitimate bidding strategy.

<sup>7</sup>An alternative term sometimes used in this context is arbitrage opportunity. However, we define an arbitrage trade to lead to risk-free profit. As this is not necessarily given, yet the trader might still favor one market expectation over another, we refer to expected profit under risk as profit opportunity.

<sup>8</sup>The up-to-date contracts for balancing responsible parties in Germany provide the regulation that the short or long volume must not exceed a proportion  $q^{\text{short/long}}$  of 10 percent of the maximum schedule value of the day. To avoid the maximum operator with decision variables, we consider the sum of the maximum value in the renewable generation forecast and the installed capacity of the controllable plants as approximation for the maximum schedule value of the day instead of  $\max_{i,j,k,h,qh(h)} (x_{i,j,h}^{\text{DA,gen,trade}} + x_{i,j,k,qh}^{\text{ID,gen,trade}})$ .

limited for the intraday market, too.

$$x_{i,j,h}^{\text{DA,short,trade}} \leq \left( \max_{qh} \left( \sum_{res=1}^{RES} P_{res}^{\text{RES}} \cdot \phi_{qh,res}^{\text{DA}} \right) + \sum_{u=1}^U P_u^{\text{U}} \right) \cdot q^{\text{short}} \quad \forall (i,j), h \quad (23)$$

$$x_{i,j,h}^{\text{DA,long,trade}} \leq \left( \max_{qh} \left( \sum_{res=1}^{RES} P_{res}^{\text{RES}} \cdot \phi_{qh,res}^{\text{DA}} \right) + \sum_{u=1}^U P_u^{\text{U}} \right) \cdot q^{\text{long}} \quad \forall (i,j), h \quad (24)$$

Further, to avoid bids on the same price level that cancel each other out and inflate bidding volumes, Equations (25) and (26) ensure for the day-ahead market that the trader either submits a sell bid or an ask bid on level  $lda$ . The analog formulation applies for the intraday market.

$$x_{lda,i,j,h}^{\text{DA,gen,bid}} + x_{lda,i,j,h}^{\text{DA,short,bid}} \leq \text{BIGM} \cdot \delta_{lda,i,j,h}^{\text{DA,ask/sell}} \quad \forall lda, (i,j), h \quad (25)$$

$$x_{lda,i,j,h}^{\text{DA,long,bid}} \leq \text{BIGM} \cdot (1 - \delta_{lda,i,j,h}^{\text{DA,ask/sell}}) \quad \forall lda, (i,j), h \quad (26)$$

Finally, the bids the trader submits to the day-ahead and the intraday market are aggregated for evaluation purposes in the variables  $x_{lda,i,j,h}^{\text{DA,bid}}$  and  $x_{lid,i,j,k,qh}^{\text{ID,bid}}$  as defined in (27) and (28). These can be interpreted as bid curves submitted to the markets.

$$x_{lda,i,j,h}^{\text{DA,bid}} = x_{lda,i,j,h}^{\text{DA,gen,bid}} + x_{lda,i,j,h}^{\text{DA,short,bid}} - x_{lda,i,j,h}^{\text{DA,long,bid}} \quad (27)$$

$$x_{lid,i,j,k,qh}^{\text{ID,bid}} = x_{lid,i,j,k,qh}^{\text{ID,gen,bid}} + x_{lid,i,j,k,qh}^{\text{ID,short,bid}} - x_{lid,i,j,k,qh}^{\text{ID,long,bid}} \quad (28)$$

#### 4.5.2 Technical Constraints

Several technical constraints need to be respected in the formulation of the bids in order to guarantee the feasibility of the market results for the operation of the plant portfolio. Firstly, the portfolio must be able to provide the reserve commitments, which are defined by the accepted bids for the 4-h-slice  $ts$ . As the reserve commitment can be covered by a pool of technical units with any spatial distribution within the market area, each single unit can contribute with its flexibility to reach the market commitment. Thereby, we consider the flexibility contributions of the units to the portfolio to be constant for quarter hours. From technical perspective, we assume reserve provision from both, the units  $u$  and the volatile renewable sources  $res$ , to be technically feasible<sup>9</sup>. The condition is formulated in (29) for the positive direction, the condition for the negative direction is derived analogously.

$$\sum_{lp=1}^{LP} \beta_{lp,i,ts}^{\text{pos}} \cdot x_{lp,i,ts}^{\text{aFRRpos}} \leq \sum_{res=1}^{RES} x_{i,qh,res}^{\text{aFRRpos,RES}} + \sum_{u=1}^U x_{i,qh,u}^{\text{aFRRpos,U}} \quad \forall ts, qh(ts), i \quad (29)$$

Secondly, the portfolio must fulfill the schedule defined by spot market commitments, which are derived from the accepted bids for each hour in the day-ahead market (and analogously for each quarter hour

<sup>9</sup>Although relatively few capacity of renewable sources is prequalified in today's reserve market, this is caused by rather economical than by technical consideration (see e.g., Brauns, Jansen, Jost, Siefert, Speckmann and Widdel, 2014, for a feasibility study). The main barriers are necessary investments in communication infrastructure and the sheer economics of renewables in providing reserve.

in the intraday market.

$$x_{i,j,h}^{\text{DA,gen,trade}} = \sum_u^U x_{i,j,h,u}^{\text{DA,dispatch,U}} + \sum_{res}^{\text{RES}} x_{i,j,h,res}^{\text{DA,dispatch,RES}} \quad \forall(i, j), h \quad (30)$$

To obtain a feasible dispatch schedule, the minimum load requirement of controllable unit  $u$  is modelled with the help of a semi-continuous variable  $x_{i,j,k,qh,u}^{\text{dispatch,U}}$  which can only take values that are either 0 or in  $[P_u^{\min}, P_u^{\text{U}}]$ . As the market constraints distinguish between day-ahead and intraday market dispatch, the overall scheduled dispatch for  $u$  is described in (31).

$$x_{i,j,k,qh,u}^{\text{dispatch,U}} = x_{i,j,h,u}^{\text{DA,dispatch,U}} + x_{i,j,k,qh,u}^{\text{ID,dispatch,U}} \quad \forall(i, j, k), h, qh(h), u \quad (31)$$

Thirdly, for a unit  $u$  or  $res$  to provide negative reserve, it must at least run on that level to be able to decrease the generation. The potential activation of negative reserve capacity must also not violate the minimum load requirement. Likewise, to provide positive reserve, it must at least run on minimum load and a potential activation must not violate the capacity constraint. Equations (32)-(36) formulate these minimum load constraints.

$$x_{i,qh,res}^{\text{aFRRneg,RES}} \leq x_{i,j,k,qh,res}^{\text{dispatch,RES}} \quad \forall(i, j, k), qh, res \quad (32)$$

$$x_{i,j,k,qh,u}^{\text{dispatch,U}} - x_{i,qh,u}^{\text{aFRRneg,U}} \geq P_u^{\min} \cdot \delta_{i,j,k,qh,u}^{\text{aFRRneg,U}} \quad \forall(i, j, k), qh, u \quad (33)$$

$$x_{i,qh,u}^{\text{aFRRneg,U}} \leq \text{BIGM} \cdot \delta_{i,j,k,qh,u}^{\text{aFRRneg,U}} \quad \forall(i, j, k), qh, u \quad (34)$$

$$x_{i,j,k,qh,u}^{\text{dispatch,U}} \geq P_u^{\min} \cdot \delta_{i,j,k,qh,u}^{\text{aFRRpos,U}} \quad \forall(i, j, k), qh, u \quad (35)$$

$$x_{i,qh,u}^{\text{aFRRpos,U}} \leq \text{BIGM} \cdot \delta_{i,j,k,qh,u}^{\text{aFRRpos,U}} \quad \forall(i, j, k), qh, u \quad (36)$$

Fourthly, the provision of positive reserve and the dispatch of a unit  $u$  is limited by its nominal capacity  $P_u^{\text{U}}$ , leading to capacity constraint (37). Likewise, a unit  $res$  is naturally limited by its nominal capacity  $P_{res}^{\text{RES}}$  derated with the generation forecast  $\phi^{\text{DA/ID}} \in [0, 1]$ . As described in Section 4.7 we distinguish between the deterministic day-ahead forecast and the scenario-based intraday update. Hereby, to respect the potential downward or upward correction of an intraday forecast update  $\phi_{k,qh,res}^{\text{ID}}$  compared to  $\phi_{qh,res}^{\text{DA}}$ , the possible reserve provision of a renewable unit  $x_{i,qh,res}^{\text{aFRRpos,RES}}$  and dispatch must satisfy two capacity constraints (38) and (39). With this formulation, the positive reserve provision is implicitly limited to the minimum out of the day-ahead and the intraday updates of the generation forecast contained in  $\Omega$ .<sup>10</sup>

$$x_{i,qh,u}^{\text{aFRRpos,U}} + x_{i,j,h,u}^{\text{DA,dispatch,U}} + x_{i,j,k,qh,u}^{\text{ID,dispatch,U}} \leq P_u^{\text{U}} \quad \forall i, j, k, h, qh(h), u \quad (37)$$

$$x_{i,qh,res}^{\text{aFRRpos,RES}} + x_{i,j,res,h}^{\text{DA,dispatch,RES}} \leq P_{res}^{\text{RES}} \cdot \phi_{qh,res}^{\text{DA}} \quad \forall(i, j), h, qh(h), res \quad (38)$$

$$x_{i,qh,res}^{\text{aFRRpos,RES}} + x_{i,j,h,res}^{\text{DA,dispatch,RES}} + x_{i,j,k,qh,res}^{\text{ID,dispatch,RES}} \leq P_{res}^{\text{RES}} \cdot \phi_{k,qh,res}^{\text{ID}} \quad \forall(i, j, k), h, qh(h), res \quad (39)$$

Further, the fuel storage capability for the dispatchable RES plants onsite (e.g., for a biogas plant) is limited, which leads to a minimum and maximum daily generation  $\nu^{\min/\max}$  of unit  $u$  as proportion

<sup>10</sup>This goes perfectly in line with the feed-in potential based approach to quantify reserve provision potential of volatile renewable sources (Brauns et al., 2014).



of a baseload operation of the installed capacity.

$$|QH| \cdot P_u^U \cdot \nu_u^{\min} \leq \sum_{qh=1}^{QH} x_{i,j,k,qh,u}^{\text{dispatch,U}} \leq |QH| \cdot P_u^U \cdot \nu_u^{\max} \quad \forall (i, j, k), u \quad (40)$$

with  $|\cdot|$  as the cardinality of a set.

Finally, each unit  $u$  has a limited load change gradient  $\Delta P_u$ , which needs to be respected to obtain technically feasible results. We consider it to be the same for upward and downward load changes and define it as proportion of the installed capacity  $P_u^U$ . At the transition between two quarter hours, load changes can originate from all considered market segments. Therefore, some additional constraints are required. Logically, the maximum possible load changes from all market segments, including potential reserve activation gradients, must comply with the load change gradient of  $u$ . To depict the potential reserve activation gradient between two consecutive quarter hours  $qh$  and  $qh + 1$ , the change in the flexibility contribution of  $u$  is split into the negative and positive part with positive variables. To model the negative reserve direction, the summands for  $qh$  and  $qh + 1$  are swapped, leading to (41) and (42).

$$x_{i,qh,u}^{\text{aFRRpos,U}} - x_{i,qh+1,u}^{\text{aFRRpos,U}} = \Delta x_{i,qh,u}^{\text{aFRRpos,U,+}} - \Delta x_{i,qh,u}^{\text{aFRRpos,U,-}} \quad \forall i, qh, u \quad (41)$$

$$x_{i,qh+1,u}^{\text{aFRRneg,U}} - x_{i,qh,u}^{\text{aFRRneg,U}} = \Delta x_{i,qh,u}^{\text{aFRRneg,U,+}} - \Delta x_{i,qh,u}^{\text{aFRRneg,U,-}} \quad \forall i, qh, u \quad (42)$$

Similarly, the spot market schedule changes for  $u$  are split with positive variables in upward and downward direction. As for the overall scheduled dispatch in (31), the day-ahead and the intraday market are considered together.

$$x_{i,j,k,qh,u}^{\text{dispatch,U}} - x_{i,j,k,qh+1,u}^{\text{dispatch,U}} = \Delta x_{i,j,k,qh,u}^{\text{spot,U,+}} - \Delta x_{i,j,k,qh,u}^{\text{spot,U,-}} \quad \forall (i, j, k), qh, u \quad (43)$$

To ensure that the changes in market commitments are not simultaneously non-zero, following *BIGM* formulations must hold for all the considered market segments. For conciseness, only the constraints for the changes in spot market commitments are presented. Formulations for the reserve segments follow analogously.

$$\Delta x_{i,j,k,qh,u}^{\text{spot,U,+}} \leq \text{BIGM} \cdot \delta_{i,j,k,qh,u}^{\text{spot,U}} \quad \forall (i, j, k), qh, u \quad (44)$$

$$\Delta x_{i,j,k,qh,u}^{\text{spot,U,-}} \leq \text{BIGM} \cdot (1 - \delta_{i,j,k,qh,u}^{\text{spot,U}}) \quad \forall (i, j, k), qh, u \quad (45)$$

The binary variable  $\delta_{i,j,k,qh,u}^{\text{dispatch,U}}$  indicates whether the dispatch changes in upward or downward direction at the transition from  $qh$  to  $qh + 1$ . With (41)-(43), the load change constraint in upward and in downward direction for a technical unit  $u$  formulates as denoted by (46) and (47). Note, that the chosen formulation with quarter hour resolution of spot market commitments and flexibility contributions to the portfolio's reserve provision implicitly respects the different temporal resolutions of reserve (4h), day-ahead (1h) and intraday (15min) markets. If these were modeled according to the respective product duration, separate cases for (a) the transition to the first quarter hour of a time slice, (b) the transition to the first quarter hour of an hour, and (c) the transition to an intra-hour quarter hour

should be distinguished.

$$x_{i,qh,u}^{\text{aFRRpos,U}} + x_{i,qh,u}^{\text{aFRRneg,U}} + \Delta x_{i,qh,u}^{\text{aFRRpos,U,+}} + \Delta x_{i,qh,u}^{\text{aFRRneg,U,+}} + \Delta x_{i,j,k,qh,u}^{\text{spot,U,+}} - \Delta x_{i,j,k,qh,u}^{\text{spot,U,-}} \leq P_u \cdot \Delta P_u \quad \forall (i, j, k), qh \quad (46)$$

$$x_{i,qh,u}^{\text{aFRRpos,U}} + x_{i,qh,u}^{\text{aFRRneg,U}} + \Delta x_{i,qh,u}^{\text{aFRRpos,U,-}} + \Delta x_{i,qh,u}^{\text{aFRRneg,U,-}} + \Delta x_{i,j,k,qh,u}^{\text{spot,U,-}} - \Delta x_{i,j,k,qh,u}^{\text{spot,U,+}} \leq P_u \cdot \Delta P_u \quad \forall (i, j, k), qh \quad (47)$$

Whereas (37) only considers the sheer capacity of  $u$ , (46) and (47) emphasize the value of the flexibility, both in upward and downward direction, and make clear that all market segments are competing for the flexibility of the portfolio. For example, during a scarcity of upward flexibility, a reduction of the spot market dispatch releases upward flexibility to be used for other commitments. It enhances the reserve potential (both positive and negative) and creates the option to increase the positive (decrease the negative) reserve contribution of  $u$  to the portfolio's reserve provision. Obviously, it is upon the trader to determine a strategy in which market segments and at which price to allocate the available resources.

## 4.6 Stochastic Programming Constraints

The problem is formulated as a multi-stage stochastic program. However, for one trading decision with the same information (at the same node of the tree), the decisions have to be consistent for the consecutive stages. Therefore, non-anticipativity constraints for all trading decisions are included in the model formulation according to the information relations: Reserve bids must be consistent throughout all  $i \in I$ , as well as bids on the day-ahead ( $j \in J$ ) and intraday ( $k \in K$ ) market. With  $Ord(\cdot)$  defined as the ordinal number of an element in its set and  $|\cdot|$  as the cardinality of the set, we formulate the constraints for the positive reserve (48) and the day-ahead market (49) bids<sup>11</sup>.

$$x_{lp,i,ts}^{\text{aFRRpos,bid}} = x_{lp,i+1,ts}^{\text{aFRRpos,bid}} \quad \forall lp, \{i \mid Ord(i) < |I|\}, ts \quad (48)$$

$$x_{lda,i,j,h}^{\text{DA,bid}} = x_{lda,i,j+1,h}^{\text{DA,bid}} \quad \forall lda, i, \{j \mid Ord(j) < |J|\}, h \quad (49)$$

## 4.7 Characterization and Modelling of Uncertainties

For the methodology to deliver meaningful results, it is essential to describe the uncertainty of the real-world problem as accurate as possible. For the sake of computational tractability, we describe the uncertainty as a finite probability space  $\Omega$  defined by scenarios  $\omega$  spanning a scenario tree in three stages with scenario branches  $i \in I$ ,  $j \in J$ , and  $k \in K$ . The first stage scenario branching, denoted by  $i$ , represents the uncertainty of the marginal auction price of the reserve market for the positive and negative product. For our models we use information that is available at 8 am on the day before delivery, one hour before the tender for automatic Frequency Restoration Reserve (aFRR) closes.

As mentioned in Section 2, the reserve market prices cannot be completely explained by fundamental

---

<sup>11</sup>Note, that considering only the aggregated bids enables the switch between short volume and dispatch of generation units as scenarios unfold. Formulations for the negative reserve and intraday market bids follow respectively.

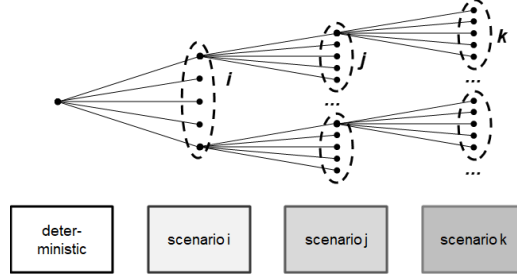


Figure 2: Illustration of the scenario tree with indices  $i$ ,  $j$  and  $k$  for the uncertainty considered in the decision stages. The stages correspond to the market segments balancing reserve, day-ahead spot market and intraday spot market.

drivers. This creates a situation where the reserve market prices are subject to an inherent uncertainty, that especially small market participants are exposed to. The marginal reserve prices<sup>12</sup> are modelled with the help of an additive model and a simulation of the stochastic components applying mean-reverting processes with jump regimes, as proposed by Keles, Genoese, Möst and Fichtner (2012) for modeling uncertain prices in electricity markets. The additive model explains the marginal prices  $y_{s,w,t}^{\text{reserve}}$  and includes the mean seasonal price for the time slice  $\bar{y}_{s,t}^{\text{reserve}}$ , the day-ahead PV generation forecast  $x_t^{\text{PV}}$ , the day-ahead residual load forecast  $x_t^{\text{RL}}$ , and the price of the previous day's auction for the respective time slice  $y_{t-6}$ . Further, weekend days and working days are distinguished with a dummy variable  $\delta_w$ . Combined with seasonal distinction by winter, summer, and transitional season (i.e., spring and fall)<sup>13</sup>, six logarithmic models are estimated by the following model equation:

$$\log y_{s,w,t}^{\text{reserve}} = c_s + \beta_1 \cdot \log \bar{y}_{s,t}^{\text{reserve}} + \beta_2 \cdot \log x_t^{\text{PV}} + \beta_3 \cdot \log x_t^{\text{RL}} + \beta_4 \cdot \log y_{t-6} + \beta_5 \cdot \delta_w + \beta_6 \cdot \delta_w \cdot \log \bar{y}_{s,t}^{\text{reserve}} + \beta_7 \cdot \delta_w \cdot \log x_t^{\text{PV}} + \beta_8 \cdot \delta_w \cdot \log x_t^{\text{RL}} + \epsilon_t \quad (50)$$

Alternative potential fundamental drivers like carbon emission and fuel prices or derivatives like the clean dark spread<sup>14</sup> have not been found significantly improving the goodness-of-fit of the additive model or suffered from strong multicollinearity and were therefore not further considered. We provide model results for model alternatives including the omitted variables in Table 4 in Annex A.2. Please note, that the seasonal mean  $\bar{y}_{s,t}^{\text{reserve}}$  to some extent implicitly captures the price influence of the omitted fundamentals.

The series of stochastic residuals  $\epsilon_t$  is modelled with the help of a mean-reversion process (Ornstein–Uhlenbeck process, see Uhlenbeck and Ornstein, 1930) and jump regimes. Regime switching probabilities and calibration of the mean-reversion process are modelled adapting the procedure introduced by Keles et al. (2012). To determine scenarios for the optimization, the obtained stochastic models are simulated 1000 times and reduced by means of k-means clustering. In Annex A.2, more details for the modeling of the reserve prices as well as a validation are provided. For the application in the case study, we use ten scenarios with probability according to the clustering to describe the uncertainty of reserve prices.

<sup>12</sup>Precisely, to obtain a smoother time series, the 90 percent quantiles of the accepted bids in each auction are considered as marginal reserve prices.

<sup>13</sup>Winter: December, January, February; Summer: June, July, August; Transition: rest.

<sup>14</sup>The clean dark spread is defined as the difference between the spot market price and the costs for fuel and emission certificates of a hard coal power plant with typical efficiency.

The marginal reserve prices  $p_{i,ts}^{\text{reserve,pos}}$  (and  $p_{i,ts}^{\text{reserve,neg}}$ ) determine the acceptance for potential reserve bids on price level  $lp$  (and  $ln$ ) for the positive (and the negative) product in scenario  $i$  and time slice  $ts$ . For the formulation of the optimization problem, the acceptance of a bid is translated to the binary parameter  $\beta_{ln,i,ts}^{\text{pos}}$  as follows (analogously  $\beta_{ln,i,ts}^{\text{neg}}$  for the negative product):

$$\beta_{ln,i,ts}^{\text{pos}} = \begin{cases} 1, & \text{if } lp \leq p_{i,ts}^{\text{reserve,pos}} \\ 0, & \text{otherwise.} \end{cases} \quad (51)$$

The second stage scenario branching, denoted by  $j$ , depicts the price uncertainty of day-ahead market prices. This uncertainty is on the one hand driven by potential changes in renewable generation and load forecasts between the gate closure of the reserve market (9 am, d-1) and that of the day-ahead spot market (12 am, d-1). On the other hand, a stochastic component for the day-ahead market itself is modelled. Potential changes in residual load forecasts (including the modeling of renewable generation and consecutively residual load) until gate closure of the day-ahead market, influence of forecast changes and stochastic nature of day-ahead market prices, are modelled with a mean-reversion process (Ornstein–Uhlenbeck process, see Uhlenbeck and Ornstein, 1930), provided with the information at 12 am on the day-ahead (d-1). As in this paper a price-taking trader is modelled, the scenarios consist of price levels and respective probabilities.

Analogously to the reserve market, to use the price scenarios in the problem formulation, the price levels are translated into a binary parameter  $\beta_{lda,j,h}^{\text{DA}}$  indicating whether a bid on a certain price level  $lda$  in hour  $h$  is accepted or declined in scenario  $j$ . Note, that the second stage is assumed to be independent from the first stage, meaning that the realization of reserve prices ( $i$ ) has no influence on day-ahead spot market prices.

Based on the second stage the third stage scenario branching, denoted by  $k$ , captures an updated renewable generation and load forecast under conditional expectation, resulting in an updated residual load forecast. These are sources of quantity uncertainty and result in a price uncertainty with regard to intraday market prices in the quarter hours  $qh$  in the scenario leaves  $k$ , reflecting the information uncertainty 60 minutes from real-time.

To thoroughly model the effects as well as the stochastics of changing residual load forecasts on spot market prices, three different sources of uncertainty are distinguished and modeled: the uncertainty of solar generation, the stochastic component of the residual load (to be interpreted as changes in either wind generation or the system load) and the stochastic component of the day-ahead and intraday market themselves. Note, that wind generation as a source of uncertainty is not modeled explicitly. In comparison to the solar generation, that follows a usual daily pattern and can be categorized into levels relatively straight forward, the wind generation does not follow a usual daily pattern but rather day-specific patterns and is therefore difficult to model with the use of a limited number of type days. We therefore include the forecasting uncertainty of wind generation in the model for the residual load uncertainty. Referring to the idea of type days, in this way we consider for the uncertainty of wind generation but relate these to seasonal-average wind days. For deriving trading decisions in real-world applications, we consider it reasonable to include forecasts for the renewable generation and consequently for the residual load on a daily basis into the approach. In particular, this allows to account for day-specific wind patterns and their risk implications.

The modeling of the solar infeed, the residual load, as well as the spot market prices follows the basic

ideas of Keles et al. (2012) and Lingohr and Müller (2019). However, the integrated modeling of mutual dependencies requires an enhanced approach. To capture the character and relations adequately, multivariate mean-reverting processes and stochastic differential equations are estimated based on empirical data and simulated with Monte Carlo. Based on the stochastic simulations, scenarios are derived by k-means clustering, as is presented in further detail in Russo et al. (2021). The stochastic modeling is applied to three seasons (summer, winter, transition) and distinguishes between working and weekend days as well as three levels of residual load (low, medium, high). In total, 18 distinct scenario trees are generated to apply the optimization to the most relevant type days. The transition from stage two to stage three is not assumed to be stage-wise independent, but the presented approach deploys conditional expectations to obtain consistent and arbitrage-free scenarios across the stages. For the case study, five scenarios for the  $j$  and  $k$ , respectively, are derived with probabilities according to the assumed normal distribution of the  $\sigma$ -ranges<sup>15</sup> in the scenario definition. In the notation, for five scenario leafs,  $j1$  is followed by  $k1 - k5$ ,  $j2$  by  $k2 - k10$ , and so on. Analogously to the previous market segments, to use the price scenarios in the problem formulation, the price levels are translated into a binary parameter  $\beta_{lid,j,k,qh}^{ID}$  denoting whether a bid on a certain price level  $lid$  in quarter hour  $qh$  is accepted or declined in scenario  $j$ 's follow-up scenario  $k$ . Combined with the 10 reserve price scenarios, each of the type days' scenario tree considers 250 possible scenarios to characterize the uncertainty from the day-ahead towards real-time.

An illustrative scenario tree to demonstrate the extent of the price uncertainty in the considered segments and the solar generation uncertainty estimated with the stochastic modeling based on empirical data is provided for the typeday  $tra2$ <sup>16</sup> in the Annex A.2 and A.4 in Figures 14-16.

## 5 Case Study

In this section, we conduct a case study in which we apply the proposed methodology to an exemplary power plant portfolio in the Germany market design setting. Germany with its high renewable shares, high data availability, and liquid day-ahead and intraday trading is particularly suitable to demonstrate our approach. We present characteristics of optimal bidding strategies under different considerations of risk. To define risk preferences, we enumerate combinations of the parameter  $\alpha$  at levels 85%, 90%, and 95% (i.e., consideration of the 15%, 10%, and 5% worst cases) and  $\lambda$  at levels 10%, 25%, and 50% (i.e., the weighting of the CVaR on  $\alpha$ -level compared to the expected value of contribution margins). Where necessary, for the results to remain concise, we present mainly the results for the risk strategy with  $\alpha = 95\%$  and  $\lambda = 50\%$ , corresponding to a strong risk aversion. As a benchmark, we present results for the risk-neutral case (i.e.,  $\lambda = 0\%$ ). The complete results for the other strategies are provided in the supplementary material.

<sup>15</sup>As discussed by Keles (2013) and deployed in adapted manner by Russo et al. (2021), the scenarios are derived from the expected mediod value of the stochastic simulation by deviating defined multiples of the standard deviation for each time step and type day respectively. To derive five scenarios, the expected mediod (denoted with  $j1$ ) is complemented by the values  $+/- \sigma$  (denoted with  $j2/j3$ ) and the values  $+/- 2 \cdot \sigma$  (denoted with  $j4/j5$ ) with probabilities according to an assumed Normal distribution. This leads to  $pr_j = 0.25$  for  $j1$ ,  $j2$ , and  $j3$ , and  $pr_j = 0.125$  for  $j4$  and  $j5$ . Same applies for the leafs denoted by  $k$ .

<sup>16</sup>A working day with medium PV feed-in and medium residual load in the transition season.

## 5.1 Data and Practical Implications

For Germany, market results of the reserve market are publicly available at [regelleistung.net](http://regelleistung.net) (2021), and for day-ahead market on the ENTSO-E transparency platform (ENTSO-E, 2021). As no historical feed-in forecast data other than the ones from ENTSO-E are available publicly, the generation forecast for the PV plants in the trader’s portfolio are assumed to be perfectly correlated with the system-wide generation forecast, in line with the assumption in Russo and Bertsch (2020). This implies a spatial dispersion of the PV plants that is representative for the overall German PV portfolio<sup>17</sup>. Hereby, the stochastic process for the PV intraday forecast update is fed by two inputs to model the information available to the trader as accurate as possible: firstly, the intraday forecast  $\phi_{qh,res}^{ID}$  update for the respective renewable plant  $res$  and quarter hour  $qh$ , provided by ENTSO-E in the morning of the trading day. Secondly, to account for the latest available information at the time of the intraday decision on stage three, the forecast error between the intraday forecast for  $qh - 2$  and the (meanwhile available) realisation of  $qh - 2$ , denoted by  $x_{qh-2,res}^{real}$ , is considered. Including the latest realised quarter hour  $qh - 2$  enables to capture the latest information on PV generation in the decision. We stress at this point, that the difference  $(\phi_{qh,res}^{ID} - x_{qh-2,res}^{real})$  is strongly auto-correlated at a lag of two.

With regard to the price risk, the stochastic price process captures effects of intraday renewable generation and load forecast updates. As mentioned in Section 3, a simplification is applied by taking the price index  $p^{ID3}$  (published by EPEX Spot, 2021), the weighted average price of all trades closed in the last three hours before the delivery period. For a more profound representation of continuous intraday price processes and intraday trading strategies, we refer to Kath and Ziel (2018) and Narajewski and Ziel (2020).

The selection of an appropriate recent time horizon of data to estimate the models turns out to be challenging, as both the spot markets and the reserve markets in Germany went through several adjustments in recent years. For the models to provide meaningful scenarios as input for the trading problem, unfortunately a trade-off between the number of observations and the absence of structural changes (e.g., induced by market design adjustments) is necessary.

First and foremost, the reserve market plays a crucial role, as major market design changes were introduced in July 2018, October 2018, July 2019, and November 2020. In July 2018, the temporal resolution and lead times were reduced from weekly off-peak and peak products to 4-hour products that are auctioned on a day-ahead basis. Then, in reaction to strategic bidding and excessive energy price bids, in October 2018 a new scoring rule was introduced calculating a scoring value as linear combination of the capacity price bid and the energy price bid. However, strategic bidding under this scoring rule led to undesirable, security-of-supply-threatening impacts. In July 2019, the market design change was therefore reversed to a capacity-price-based scoring. Since November 2020, a separate auction for balancing energy price bids takes place 60 minutes before real-time, in which also bidders without accepted capacity price bid may participate.

Secondly, due to unwanted ring flows through Poland and the Czech Republic the formerly single market area Austria-Germany was split from October 2018 on. As the market split changed both the demand and the supply structure for the German market participants, price formation on both the day-ahead and the intraday market was affected.

---

<sup>17</sup>However, in the real-world (commercial) application, the availability of the required portfolio-specific forecast data would be no limiting factor.

We therefore use data from the time horizon between July 2019 and the first COVID19-caused lockdown in March 2020 to estimate the stochastic price processes. In this period, we observe stable market circumstances and no structural changes on either the demand or the supply side.

## 5.2 Composition of Portfolio

The portfolio, for which the presented methodology is particularly relevant, should meet certain characteristics regarding the cost-structure. In order to compete with the reserve market prices, the variable costs of the portfolio should be close to average spot market price levels. Just and Weber (2015) refer to the relation between variable costs and spot market price levels as marginality and distinguish between infra-marginal (i.e.,  $\kappa^{\text{var}} < p^{\text{spot}}$ ), marginal (i.e.,  $\kappa^{\text{var}} = p^{\text{spot}}$ ) and extra-marginal (i.e.,  $\kappa^{\text{var}} > p^{\text{spot}}$ ) power plants. In this terminology, the portfolio should change between being infra-marginal, marginal, and extra-marginal for different time steps and scenarios.

For the case study, we consider a portfolio consisting of a set of electricity-led and thus controllable biogas power plants, and a set of PV plants as volatile renewable source to be suitable to reflect the strengths of the presented approach. Firstly, it depends upon both, the uncertainty of generation quantities (relevant for *res* units) and the uncertainty of price levels (relevant for both *u* and *res* units). Secondly, the variable costs  $\kappa_{u1}^{\text{var}}$  are roughly in the range of price variations of the spot markets. Finally, the portfolio is able to provide flexibility in both upward and downward direction or to use the flexibility to profit from spot market prices.

The portfolio for the case study is therefore defined as presented in Table 2. For conciseness, the plants are aggregated and handled as single unit *u1* and *res1*, respectively. The only limitation associated with this is that if multiple smaller units are considered, the minimum load requirement ( $P_u^{\text{min}}$ ) could be handled more flexibly.

Table 2: Composition of plant portfolio and techno-economic parameters for case study.

Parameter	Symbol	Unit	Value
Installed capacity PV generation <i>res1</i>	$P_{res1}^{\text{RES}}$	[MW]	100
Maximum load change of <i>res1</i> within 5 minutes, as share of $P_{res1}^{\text{res}}$	$\Delta P_{res1}^{\text{RES}}$	[-]	1.00
Installed capacity controllable generation <i>u1</i>	$P_{u1}^{\text{U}}$	[MW]	100
Minimum load requirement of <i>u1</i> , as share of $P_{u1}^{\text{U}}$	$P_{u1}^{\text{min}}$	[-]	0.20
Minimum daily generation of <i>u1</i> , as share of baseload operation at $P_{u1}^{\text{U}}$	$\nu_{u1}^{\text{min}}$	[-]	0.50
Maximum daily generation of <i>u1</i>	$\nu_{u1}^{\text{max}}$	[-]	0.95
Variable costs of <i>u1</i>	$\kappa_{u1}^{\text{var}}$	[EUR/MWh]	40
Maximum load change of <i>u1</i> within 5 minutes, as share of $P_{u1}^{\text{U}}$	$\Delta P_{u1}^{\text{U}}$	[-]	0.50

## 5.3 Evaluation of Trading Strategies for the Portfolio

As the results for all investigated 18 type days are very extensive, we present the results for an exemplary type day in detail, and based on that we discuss the findings more generally. We present the results for a weekday with a medium level of PV generation and a medium residual load level in the transition season.

Before investigating the decision variables as well as the rationales and characteristics behind the different trading strategies, we first look at the values of the target function and the overall results. To visualize the terms contained in the target function with risk consideration (i.e., expected contribution margins and CVaR), we define the efficient frontier as all combinations of expected contribution margins and CVaR for trading strategies, that were found not to be dominated by another set of decision variables.

Figure 3 presents the efficient frontier plot for all considered combinations of  $\alpha$  and  $\lambda$ , as well as for the risk-neutral case. For all investigated CVaR-intervals  $\alpha$ , a similar concave pattern can be observed. Obviously, the consideration of risk decreases the expected value of the trading decision, and at the same time with an increasing weight of the risk metric the risk exposure is reduced. Noteworthy, the increase in  $\lambda$  from risk-neutral (0%) to 10% comes with a large impact, likewise the increase from 10% to 25%. In the former, the expected contribution margins decrease considerably (decrease of 1,228-1,903 EUR/day), whereas the CVaR increases strongly (27,763-35,330 EUR/day), indicating a lower risk exposure. In the increase from 10% to 25%, the expected contribution margins decrease stronger (decrease of 5,110-5,659 EUR/day compared to risk-neutral), but yields further benefits with regard to the risk exposure (CVaR increase of 51,000-56,003 EUR/day compared to risk-neutral). However, the increase in  $\lambda$  from 25% to 50% has comparably a small impact. The reduction of the expected contribution margins outweighs the small changes in risk exposure. Overall, a concave shape of the efficient frontier can be observed for all  $\alpha$  levels. Table 5 in Annex A provides an overview over the numbers determining the efficient frontier. We stress at this point, that none of the defined and evaluated risk strategies strictly dominates another. In a real-world application, a trader would still be required to choose the risk preference, yet based on information about the opportunities and risks related with the trading decision.

In order to gain insights about the distributional patterns of the contribution margins in the different

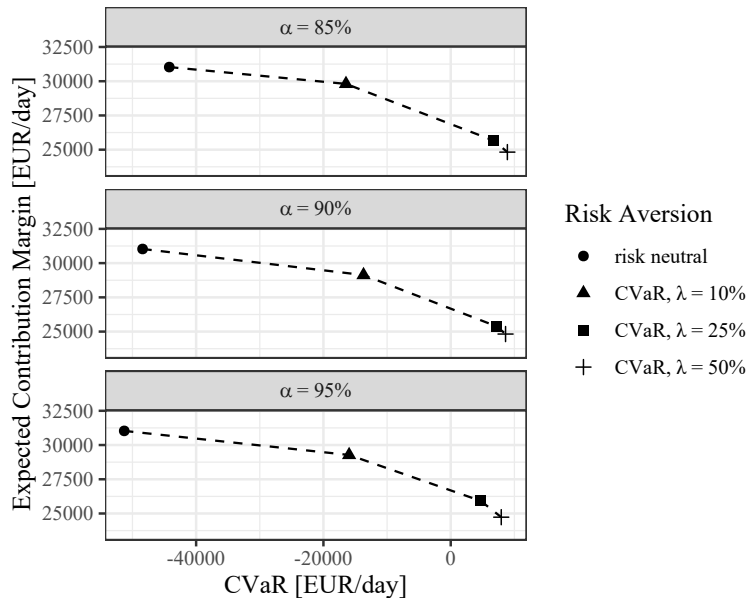


Figure 3: Efficient frontier of trading decisions for different levels of CVaR interval ( $\alpha$ ) and risk aversion ( $\lambda$ ), medium weekday transition season (tra2).



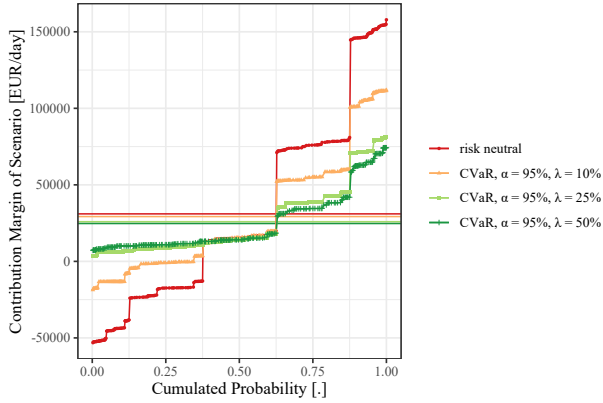


Figure 4: Empirical cumulative distributions of contribution margins throughout scenarios for trading strategies considering the  $\alpha = 95\%$  level for the CVaR, medium weekday transition season (tra2).

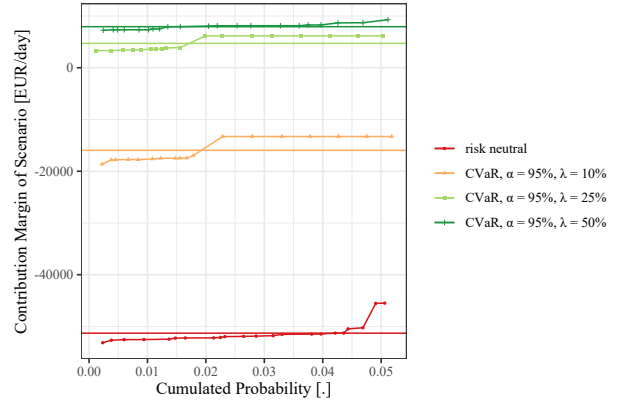


Figure 5: Empirical cumulative distributions of contribution margins in the 5% of worst case scenarios (CVaR range), medium weekday transition season (tra2).

scenarios<sup>18</sup>, we arrange the contribution margins in increasing order for each trading strategy. This visualization can be compared to an empirical cumulative distribution function (ECDF) of a distribution and reads as follows: The contribution margin is lower or equal to the value on the vertical axis with the probability level indicated by the horizontal axis. To be able to identify fat tails in the distribution, a second plot zooms into the interval considered for the risk metric CVaR. The expected value of the contribution margin and the CVaR are respectively included into the plots as horizontal lines. Figures 4 and 5 show the ECDF for the strategies with  $\alpha=95\%$ . One intuitive result derived from the visualization of the risk distribution is that the consideration of risk drastically lowers the spread between the worst and the best cases and thus narrows the distribution, at the expense of a moderate loss in expected contribution margins. Evaluations for the other  $\alpha$ -values show analogous patterns.

Investigating the contribution of each market segment to the portfolio's contribution margins in the different scenarios for different trading strategies, we find the main source of risk and the major lever of risk hedging strategies to lie in the spot market decisions, i.e. how to submit bids to the day-ahead and intraday market. To present key differences of risk-neutrality and risk aversion in trading strategies, Figures 6 to 7 show the trader's optimal bids on the day-ahead market and intraday market for the risk-neutral and the strongly risk-averse strategy ( $\alpha = 95\%$ ,  $\lambda = 50\%$ ). As these bids are submitted on the second (day-ahead) and third (intraday) stage of the problem, we summarize the bids for the representative realization  $i1$  of the first stage. Note that the actual bids submitted on a stage do not anticipate realized information from later stages and are thus consistent for all  $j$  and  $k$  for the day-ahead and the intraday market, respectively (see Eq. 48-49).

Figure 6 shows for the risk-neutral day-ahead market bids. The expectation of potentially higher prices in the intraday market yields buying bids, indicating the trader is willing to take a long position. These bids are in the range of the trader's allowed long/short position range (see Eq. (24) and (23)), and are not linked to the portfolio dispatch. The risk-neutral trader seeks to sell the electricity generation on the intraday market, that offers (in expectation) a slightly higher, yet more volatile price level, and even increases a high selling position to sell more volume than the generation capability. On

<sup>18</sup>In total, we distinguish 250 scenario leaves with non-equally distributed probabilities. See Section ?? and Annex A.2 for more details on the construction of the trees and probabilities.

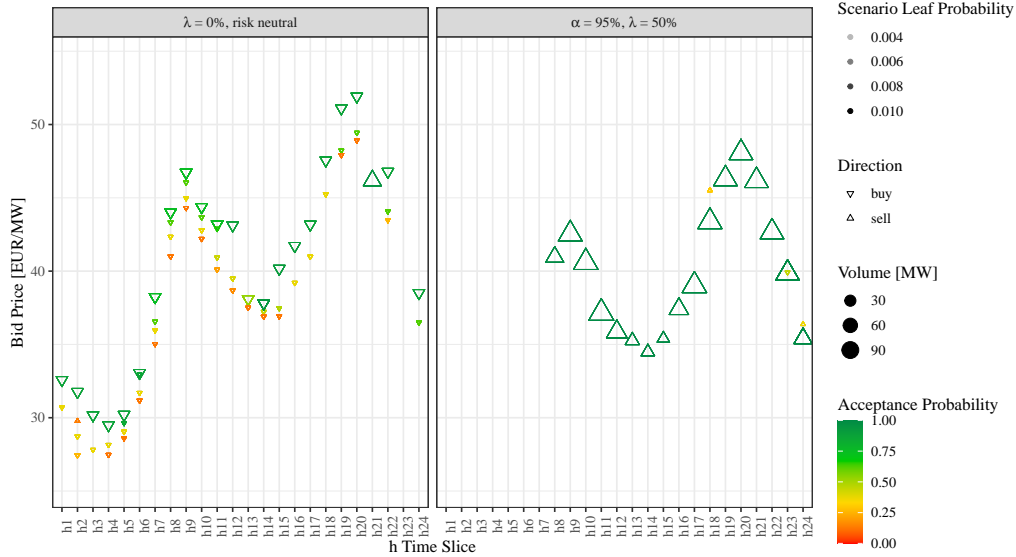


Figure 6: Day-ahead market bids for risk-neutral strategy, medium weekday transition season (tra2). day-ahead market bids for risk-averse strategy ( $\alpha = 95\%$ ,  $\lambda = 50\%$ ), medium weekday transition season (tra2).

the other hand, the risk-averse strategy focuses on reducing the risk exposure early on by selling most of the generation on the day-ahead market at secure yet in expectation slightly lower prices. Notably, the day-ahead trading volumes of the risk-averse trading strategy are considerably higher. Further, the risk-averse strategy contains ask bids on price levels below the variable costs of the dispatchable unit  $u$ , allowing to re-buy generation that was sold in the day-ahead market at a higher price. The risk-neutral intraday bids contain less bids to re-position the portfolio, but rely on the (in expectation) higher prices on the intraday market.

The submitted bids on the day-ahead market and the eventual market result determine the position

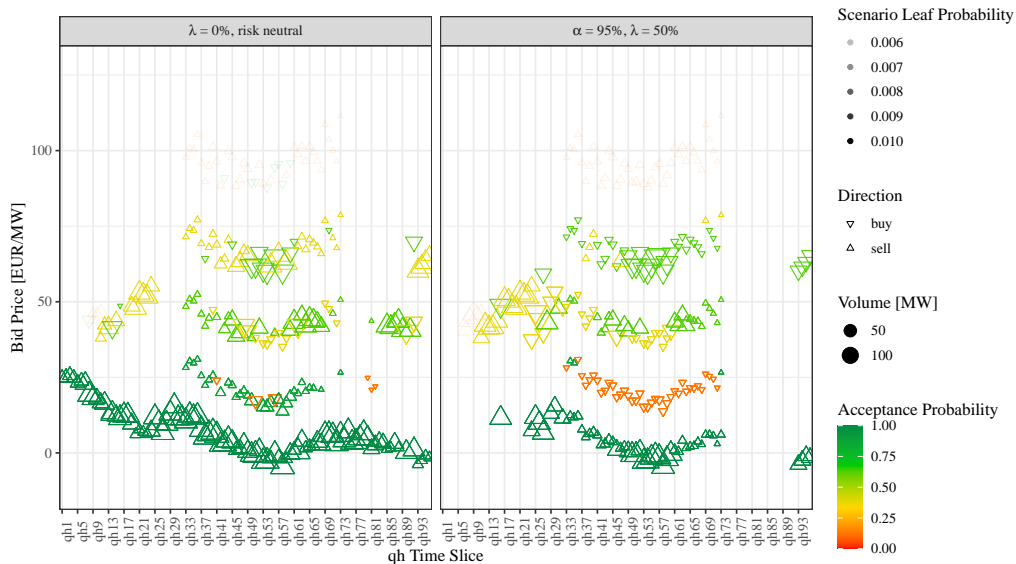


Figure 7: Intraday market bids for risk-neutral strategy, medium weekday transition season (tra2). Intraday market bids for risk-averse strategy ( $\alpha = 95\%$ ,  $\lambda = 50\%$ ), medium weekday transition season (tra2).

of the trader when facing the intraday stage. Figure 7 shows the submitted intraday market bids, that follow the respective day-ahead market bids for the risk-neutral and the risk-averse trading strategy.

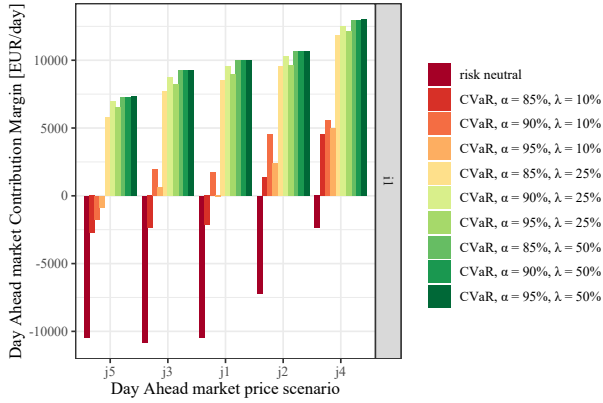


Figure 8: Diagram of contribution margins on the day-ahead market for realizations of scenario  $j$  as successor of  $i1$  under different risk attitudes.

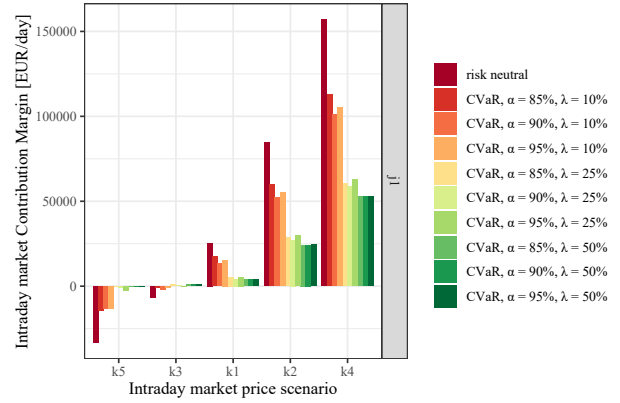


Figure 9: Diagram of contribution margins on the intraday market for realizations of scenario  $k$  as successor of  $i1$  and  $j1$  under different risk attitudes.

It can be observed in the lower string of bids, that driven by the pre-positioning (long position) from the day-ahead market, the risk-neutral strategy mainly consists in selling the electricity at any price on the intraday market. In case the intraday market settles at a higher price level, these bids will be remunerated with the higher price, too, which stands in opposition to bids on the reserve market. It can further be observed, that a considerable amount of bids is placed on price levels, that are linked to a low acceptance probability.

For the representative scenario realizations  $i1$  and  $j1$ , Figures 8 and 9 present the resulting contribution margins from the day-ahead and the intraday market for the considered trading strategies. As discussed before, the risk-averse bids prevent the trader from taking a long position on the day-ahead market and result in profitable sales, which to some extent depends on the realization of  $j$ . On the other hand, the risk-neutral ask bids lead to considerable costs (i.e., negative contribution margins), and no positive contribution margins on the day-ahead market. The value of the long position then strongly swings with the realized intraday market scenario, leading to further negative contribution margins if prices are low ( $k5$  and  $k3$ ) and to very profitable sales if prices are high ( $k2$  and  $k4$ )<sup>19</sup>. Inspecting the successors of the lower ( $j3$  and  $j5$ ) and higher ( $j2$  and  $j4$ ) day-ahead market price scenarios (see Figure 8) yields the same relations yet differently pronounced. The remaining strategies with a moderate risk-aversion follow a compromise.

The day-ahead bids do not contain ask bids to profit from potentially higher prices in the intraday market, yet a share of the (expected) portfolio generation is offered only at high price levels with low acceptance probabilities on the day-ahead market. Such a mixed bidding behavior allows for both, profiting from secure day-ahead market revenues as well as profiting from higher or lower prices in the intraday market. It avoids excessive ask or sell pressure in the intraday market and provides a balance between the advantages of the day-ahead market (low uncertainty, in expectation lower prices) and the ones of the intraday market (high uncertainty, in expectation higher prices). Whether and which bids are submitted to the reserve market is determined by the opportunities the reserve market and the following spot markets offer and at which costs in terms of operational constraints, such as scheduling restrictions and inflexibility, the reserve can be provided by the portfolio. The

<sup>19</sup>Note that the scenarios are not equally probable. As mentioned in Section 4.7, the probability of the moderate scenarios (three scenarios in the center of the plot) is 25% each, and the probability of the outer scenarios is 12.5% each.

opportunities are three-fold: First, the pay-as-bid remuneration opens up a strategy space to decide among different reserve price levels and volumes to bid on them. Hereby, the rationale is to avoid the winner’s curse introduced to economic theory by Thaler (1988). Second, the expected level of spot market prices and thus the expected profits require to consider which market is more profitable. Third, the opportunity to profit from price variations between the day-ahead and the intraday spot market by flexibly adjusting to new information.

It therefore occurs, as in the case of the considered typeday *tra2*, that the spot market opportunities dominate the reserve market prices for the positive direction and no bids are submitted to the positive reserve segment. Investigating the economics of the reserve market segments (see Just and Weber, 2008, 2015, for formal descriptions of the interplay between spot and reserve markets), it becomes clear that providing positive reserve competes with spot market operations, whereas providing negative reserve can be considered a complementary element to spot market operations<sup>20</sup>, and brings only little operational restrictions. A main finding is therefore, that the reserve bids determined with the stochastic optimization differ fundamentally for negative and positive reserve provision.

The bids submitted for the positive reserve, if any are submitted, are placed only on high price levels. In the however unlikely case of a high reserve price scenario, the trader profits from the accepted bid(s). In the case the submitted bids are rejected, the following spot markets offer similar profit opportunities. This rationale is further confirmed by the pay-as-bid remuneration, as it incentivizes riskier reserve market bids. On the other hand, the bids submitted for the negative reserve are not balancing potential reserve market profits with potential spot market profits. The rationale aims at balancing the opportunities among the reserve price levels. Therefore, more diversification in bids and patterns for different risk strategies can be observed. To illustrate this, Figure 19 in the Annex A compares the bids submitted for the time slice 12-16h for the risk-neutral strategy and for a risk-averse strategy. The first observation to note is that the risk aversion leads to a diversification in terms of price levels and aims at securing revenues, whereas the risk-neutral strategy places the reserve bids on a high price level. This can be interpreted as betting on a high price scenario. Secondly, the volume offered in the risk-averse strategy exceeds the volume offered in the risk-neutral strategy, which corresponds to accepting more operational constraints for the spot market decisions. In Annex A.5, we provide additional results, such as the bid curves for all considered risk strategies in time slice 12-16h (Figure 10) and the bids submitted for all time slices of the *tra2* day (Figure 20). To present results for another typeday, we also provide the bids for the negative reserve for a summer weekend day with high residual load (*sum6*, see (Figures 22 and 21)). On this typeday, the diversification of bids is particularly pronounced and underlines the presented findings.

Regarding to the problem size, solver parameters and computational performance, we found the following configuration to be suitable. In its reduced form, the problem for a single type day and risk strategy has 720,000 restrictions (inequality/equality), 560000 variables (230000 binary), and 2,000,000 coefficients. The problem was implemented in GAMS and solved with the CLPEX solver, applying parallel mode with 36 threads and a MIP gap of 0.01. Using a computer equipped with an Intel Xeon Gold 6248R (3.0GHz, 24 Cores, 48 Threads) and 64 GB RAM, the solution time with cold

---

<sup>20</sup>This holds for the case that spot prices are higher than the variable costs. For the case that spot prices are below the variable costs, depending on operational restrictions such as minimum fuel consumption, the revenues for providing negative reserve must compensate for the unprofitable spot market operation of the minimum run capacity and the offered reserve volume. However, the revenues for providing of positive reserve must only compensate for the minimum run capacity.

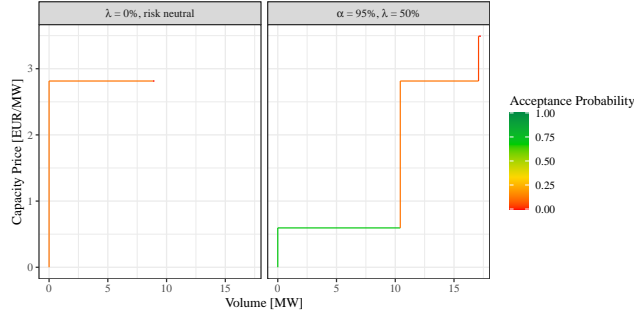


Figure 10: Reserve market (aFRRneg) bids for the time slice 12-16h for the risk-neutral strategy and for a risk-averse strategy ( $\alpha = 95\%$ ,  $\lambda = 50\%$ ), medium weekday transition season (tra2).

start amounts to roughly three hours for a single bidding strategy. However, providing the solver with the solution of a similar strategy (warm start), the solution time can be reduced to below 30 minutes for a single bidding strategy. Further, for days with strictly dominant markets (i.e., the spot market offers higher profit opportunities than the reserve markets), the solver determines within a matter of minutes. Sensitivity runs with only five instead of ten reserve price scenarios reduced computational more than proportionally. Considering the structure of the problem and the curse of dimensionality, this finding is intuitive.

## 5.4 Discussion

The results presented for the case study and the analysis of underlying bidding rationales allows to derive general conclusions with regard to decisions under uncertainty in the sequential electricity market context. The first conclusion we draw is that trading more and thereby taking a position at an earlier stage can reduce the risk significantly. Intuitively, placing reserve bids at low prices with high acceptance probability and selling generation on the day-ahead market sacrifices profit opportunities but secures revenues early on.

Measures to increase the expected profit and the associated risk exposure include (a) betting on high reserve prices, (b) betting on intraday prices higher than the day-ahead prices (no/few reserve bids, selling offers only at high price levels or even buying to go long on the day-ahead market), and (c) betting on intraday prices lower than the day-ahead prices (no/few reserve bids, selling offers at low price levels or even selling to go short on the day-ahead market). It can be concluded that the intraday market offers the highest risk, but also the highest reward, and that the main task of a trader is to balance these out by participating in all markets.

Therefore, a reasonable strategy appears to determine the operation decision based on the reserve and the day-ahead market results, but to not sell all generation capacity and flexibility on the day-ahead. In that way, one can profit from opportunities of higher or lower prices in the intraday market and the portfolio risk is reasonably hedged. However, the discussion remains without one strictly dominant strategy as this is no one-size-fits-it-all case. The faced uncertainties and the myriads of potential decisions in the markets require a sound decision support.

At this point, we critically reflect that further efforts can improve the developed approach in the future. On the one hand, the neglected reserve market segments as well as activation of reserve energy could be included to the approach. On the other hand, the representation of the intraday market as a single uniform pricing auction neglects arrival processes of prices in continuous trading

and therefore potential re-positioning profits. Finally, trading strategies for larger portfolios with the potential to change market prices should adequately account for the price effects of the submitted bids in each market segment. However, for the purpose of modeling the inter-related uncertainties and trading decisions in a complex setting as presented in this study, these simplifications are considered necessary to remain able to identify the central implications and to keep the model mathematically tractable.

## 6 Conclusions and Outlook

The developed methodology models the uncertainty related to the trading decisions of a trader on the day-ahead towards real-time on three decision stages (balancing reserve market, day-ahead spot market, intraday spot market) with the help of scenario trees and under conditional expectation. We present a multi-stage stochastic optimization approach that allows to determine optimal bids for the sequence of the reserve market, the day-ahead spot market, and the intraday spot market. Thereby, we consider all market segments that might appear as opportunities to each other.

The approach provides valuable insights with regard to profit distributions under uncertainty and allows for an extension of the target function to include risk. As the characterization of uncertainty contains much more information than a risk-neutral optimization (maximizing the expected value) can capture, we evaluate trading strategies with different risk preferences. An efficient frontier is derived as the set of optimal and non-dominated tuples of expected profit and risk exposure of the considered trading strategies. We discuss trading implications for the individual market segments, but most importantly for their interplay. Amongst others, the results lead to the conclusion that risk-hedging trading strategies prefer securing revenues on earlier stages and thereby being independent of the more volatile prices on the intraday stage. Risk can be effectively reduced by placing reserve bids on lower price levels and selling generation mostly on the day-ahead spot market. However, in that way potentially higher revenues in the reserve market and on the intraday stage are disregarded as they inevitably increase the risk exposure of the revenues. We provide new insights to short-term market decisions under uncertainty, that are interesting for several stakeholder groups, such as traders, policy makers, and research.

Taking the developed approach, next steps could go in the following directions. Firstly, traders may seek the commercial application to a real-world portfolio. This implies using portfolio-specific forecasting information distinct from the overall system renewable generation, and integrating fuel and carbon prices as well as scenario trees on a daily basis instead of using typedays.

Secondly, policy makers may be interested in the individual behavior of participants in short-term markets in extreme events, such as scarcity scenarios that push the system to the limits, or future electricity systems based on renewable generation. Such scenarios are not covered by our data and scope. However, coupling our approach with other electricity market models as well as insights from recent scarcity events (e.g., in France or Texas) offer a solid basis to model these uncertainties and to assess policy implications. Thirdly, electricity storage and sector-coupling with other energy carriers such as hydrogen may be included in the approach, interesting for both traders and scholars. This extension implies a temporal coupling and complicates the determination of optimal bids, particularly if considering reserve energy activation for storages.

Finally, an extension of the presented approach towards investment appraisal based on uncertain revenue streams from multiple markets appears to become more and more relevant. Especially considering the increasing necessity of flexibility and its optimal use for the energy system, all stakeholder groups are interested in methods to assess investment options more sound than based on established valuation approaches.

## References

- Birge, J.R., Louveaux, F., 2011. Introduction to stochastic programming. Springer series in operations research and financial engineering. 2. ed. ed., Springer, New York, NY. URL: [http://sub-hh.ciando.com/book/?bok\\_id=320411](http://sub-hh.ciando.com/book/?bok_id=320411), doi:10.1007/978-1-4614-0237-4.
- Boomsma, T.K., Juul, N., Fleten, S.E., 2014. Bidding in sequential electricity markets: The Nordic case. *European Journal of Operational Research* 238, 797–809. doi:10.1016/j.ejor.2014.04.027.
- Brauns, S., Jansen, M., Jost, D., Siefert, M., Speckmann, M., Widdel, M., 2014. Regelenergie durch Windkraftanlagen: Abschlussbericht. URL: [https://www.iee.fraunhofer.de/content/dam/iwes-neu/energiesystemtechnik/de/Dokumente/Studien-Reports/20140822\\_Abschlussbericht\\_rev1.pdf](https://www.iee.fraunhofer.de/content/dam/iwes-neu/energiesystemtechnik/de/Dokumente/Studien-Reports/20140822_Abschlussbericht_rev1.pdf).
- Conejo, A.J., Carrión, M., Morales, J.M., 2010. Decision making under uncertainty in electricity markets. volume 153 of *International series in operations research and management science*. Springer, New York, NY.
- ENTSO-E, 2021. Transparency platform. URL: <https://transparency.entsoe.eu/>.
- EPEX Spot, 2021. Intraday market data. URL: <https://www.epexspot.com/en>.
- Fleten, S.E., Kristoffersen, T.K., 2007. Stochastic programming for optimizing bidding strategies of a Nordic hydropower producer. *European Journal of Operational Research* 181, 916–928. doi:10.1016/j.ejor.2006.08.023.
- investing.com, 2021. Stock market quotes & financial news. URL: <https://www.investing.com/>.
- Just, S., Weber, C., 2008. Pricing of reserves: Valuing system reserve capacity against spot prices in electricity markets. *Energy Economics* 30, 3198–3221. doi:10.1016/j.eneco.2008.05.004.
- Just, S., Weber, C., 2015. Strategic behavior in the German balancing energy mechanism: Incentives, evidence, costs and solutions. *Journal of Regulatory Economics* 48, 218–243. doi:10.1007/s11149-015-9270-6.
- Kath, C., Ziel, F., 2018. The value of forecasts: Quantifying the economic gains of accurate quarter-hourly electricity price forecasts. *Energy Economics* 76, 411–423. URL: <http://arxiv.org/pdf/1811.08604v1>, doi:10.1016/j.eneco.2018.10.005.
- Keles, D., 2013. Uncertainties in energy markets and their consideration in energy storage evaluation. volume 4 of *Produktion und Energie / Karlsruher Institut für Technologie, Institut für Industriebetriebslehre und industrielle Produktion u. Deutsch-Französisches Institut für Umweltforschung*. KIT Scientific Publishing, Karlsruhe.
- Keles, D., Genoese, M., Möst, D., Fichtner, W., 2012. Comparison of extended mean-reversion and time series models for electricity spot price simulation considering negative prices. *Energy Economics* 34, 1012–1032. doi:10.1016/j.eneco.2011.08.012.
- Klaboe, G., Fosso, O.B., 2013. Optimal bidding in sequential physical markets — A literature review and framework discussion, in: 2013 IEEE Grenoble Conference, IEEE. pp. 1–6. doi:10.1109/PTC.2013.6652371.
- Klæboe, G., Braathen, J., Eriksrud, A., Fleten, S.E., 2019. Day-Ahead Market Bidding Taking the Balancing Power Market Into Account. *SSRN Electronic Journal* doi:10.2139/ssrn.3434318.
- Kraft, E., Keles, D., Fichtner, W., 2018. Analysis of Bidding Strategies in the German Control Reserve Market, in: 2018 15th International Conference on the European Energy Market (EEM), IEEE. pp. 1–6. doi:10.1109/EEM.2018.8469903.

- Kraft, E., Ocker, F., Keles, D., Fichtner, W., 2019. On the Impact of Voluntary Bids in Balancing Reserve Markets, in: 2019 16th International Conference on the European Energy Market (EEM), IEEE. pp. 1–6. doi:10.1109/EEM.2019.8916455.
- Laur, A., Nieto-Martin, J., Bunn, D.W., Vicente-Pastor, A., 2018. Optimal procurement of flexibility services within electricity distribution networks. *European Journal of Operational Research* doi:10.1016/j.ejor.2018.11.031.
- Lingohr, D., Müller, G., 2019. Stochastic modeling of intraday photovoltaic power generation. *Energy Economics* 81, 175–186. doi:10.1016/j.eneco.2019.03.007.
- Möst, D., Keles, D., 2010. A survey of stochastic modelling approaches for liberalised electricity markets. *European Journal of Operational Research* 207, 543–556. doi:10.1016/j.ejor.2009.11.007.
- Narajewski, M., Ziel, F., 2020. Econometric modelling and forecasting of intraday electricity prices. *Journal of Commodity Markets* 19, 100107. doi:10.1016/j.jcomm.2019.100107.
- Ocker, F., Ehrhart, K.M., 2017. The “German Paradox” in the balancing power markets. *Renewable and Sustainable Energy Reviews* 67, 892–898. doi:10.1016/j.rser.2016.09.040.
- Ocker, F., Ehrhart, K.M., Ott, M., 2018. Bidding strategies in Austrian and German balancing power auctions. *Wiley Interdisciplinary Reviews: Energy and Environment* 7, e303. doi:10.1002/wene.303.
- Ottesen, S.Ø., Tomasgard, A., Fleten, S.E., 2018. Multi market bidding strategies for demand side flexibility aggregators in electricity markets. *Energy* 149, 120–134. doi:10.1016/j.energy.2018.01.187.
- Pandžić, H., Morales, J.M., Conejo, A.J., Kuzle, I., 2013. Offering model for a virtual power plant based on stochastic programming. *Applied Energy* 105, 282–292. doi:10.1016/j.apenergy.2012.12.077.
- Plazas, M.A., Conejo, A.J., Prieto, F.J., 2005. Multimarket Optimal Bidding for a Power Producer. *IEEE Transactions on Power Systems* 20, 2041–2050. doi:10.1109/TPWRS.2005.856987.
- regelleistung.net, 2021. Balancing reserve market data. URL: (provided jointly by the German TSOs) <https://www.regelleistung.net/ext/>.
- Russo, M., Bertsch, V., 2020. A looming revolution: Implications of self-generation for the risk exposure of retailers. *Energy Economics* 92, 104970. doi:10.1016/j.eneco.2020.104970.
- Russo, M., Kraft, E., Bertsch, V., Keles, D., 2021. Self-generation and the short-term risk management problem of electricity retailers. URL: [www.iip.kit.edu](http://www.iip.kit.edu).
- Thaler, R.H., 1988. Anomalies: The winner’s curse. *Journal of Economic Perspectives* 2, 191–202. doi:10.1257/jep.2.1.191.
- Uhlenbeck, G.E., Ornstein, L.S., 1930. On the Theory of the Brownian Motion. *Physical Review* 36, 823–841. doi:10.1103/PhysRev.36.823.
- Zheng, Q.P., Wang, J., Liu, A.L., 2015. Stochastic Optimization for Unit Commitment—A Review. *IEEE Transactions on Power Systems* 30, 1913–1924. doi:10.1109/TPWRS.2014.2355204.



## A Annex

# Nomenclature

## Sets and Indices

$H$	hours of day
$I$	scenarios for reserve market
$J$	scenarios for day-ahead market
$K$	scenarios for intraday RES generation and intraday market
$LDA$	levels of price bids for Day-ahead (DA) market
$LID$	levels of price bids for Intraday (ID) market
$LN$	levels of capacity price bids for negative reserve (aFR-Rneg)
$LP$	levels of capacity price bids for positive reserve (aFR-Rpos)
$QH$	quarter hours of day
$QH(H)$	mapping of quarter hours to respective hours
$QH(TS)$	mapping of quarter hours to respective 4 hour time slices
$RES$	RES units in plant portfolio
$TS$	4 hour time slices of day
$U$	controllable units in plant portfolio

## Parameters

$\alpha$	probability level for VaR and CVaR
$\beta^m$	binary acceptance parameter of bids in market $m \in \{\text{aFRRpos}, \text{aFRRneg}, \text{DA}, \text{ID}\}$
$\kappa^{\text{var}}$	variable costs
$\lambda$	risk aversion weight parameter
$\nu^{\text{min/max}}$	minimum/maximum daily generation of controllable unit as share of baseload operation at $P^U$
$\phi^{\text{DA/ID}}$	day-ahead/intraday renewable generation forecast
$\Delta P^{\text{U/RES}}$	maximum load change of controllable/renewable unit within reserve activation time as share of $P^{\text{U/RES}}$
$\Delta t$	correction factor between quarter hours and hours
$BIGM$	sufficiently large number, e.g. 100,000
$p^{\text{min}}$	minimum load of controllable unit
$p^m$	market price of market $m \in \{\text{aFRRpos}, \text{aFRRneg}, \text{DA}, \text{ID}\}$
$P^{\text{U/RES}}$	nominal capacity of controllable/renewable unit
$pr_\omega$	probability of scenario $\omega \in \{i,j,k\}$
$q^{\text{short/long}}$	maximum short/long position on Day-ahead or Intraday market as proportion of maximum selling volume on spot market

## Variables

$\eta$	Value-at-Risk (VaR)
--------	---------------------

$\kappa$	cost
$\pi$	contribution margin
$\rho$	revenue
$x^{\text{sm,trade}}$	trade volume in spot market $sm \in \{\text{DA}, \text{ID}\}$ , negative value represents buy volume
$x^{\text{imb}}$	imbalance volume to be covered by TSO, <i>BIGM</i> formulation to impose zero imbalance

## Positive Variables

$\Delta x^{\text{m,U,+/-}}$	upward/downward (+/-) load change of controllable unit in market $m' \in \{\text{aFRRpos}, \text{aFRRneg}, \text{spot}\}$
$s$	auxiliary variable for <i>CVaR</i> modeling
$x^{\text{m,bid}}$	bid volume on price level in market $m \in \{\text{aFRRpos}, \text{aFRRneg}, \text{DA}, \text{ID}\}$
$x^{\text{rm,U/RES}}$	volume of $rm \in \{\text{aFRRpos}, \text{aFRRneg}\}$ provided by controllable/renewable unit $U/RES$
$x^{\text{dispatch,U/RES}}$	dispatch volume of controllable/renewable unit
$x^{\text{imb,+/-}}$	absolute value of positive/negative (+/-) imbalance volume
$x^{\text{sm,dispatch,U/RES}}$	dispatch volume of controllable/renewable unit addressed to spot market $sm \in \{\text{DA}, \text{ID}\}$
$x^{\text{sm,gen,bid}}$	sell bid volume for dispatch generation on price level in spot market $sm \in \{\text{DA}, \text{ID}\}$
$x^{\text{sm,gen,trade}}$	sell volume of dispatch generation in spot market $sm \in \{\text{DA}, \text{ID}\}$
$x^{\text{sm,long,bid}}$	ask bid volume on price level in spot market $sm \in \{\text{DA}, \text{ID}\}$ to get a long position
$x^{\text{sm,long,trade}}$	buy volume on market $sm \in \{\text{DA}, \text{ID}\}$ to get a long position
$x^{\text{sm,short,bid}}$	sell bid volume on price level in spot market $sm \in \{\text{DA}, \text{ID}\}$ to get a short position
$x^{\text{sm,short,trade}}$	sell volume on market $sm \in \{\text{DA}, \text{ID}\}$ to get a short position

## Binary Variables

$\delta^{\text{sm,ask/sell}}$	auxiliary variable to ensure for one price level in spot market $sm \in \{\text{DA}, \text{ID}\}$ only either an ask or a sell bid
$\delta^{\text{imb}}$	auxiliary variable for absolute value of imbalance
$\delta^{\text{m,U}}$	auxiliary variable for (potential) load change in commitment on market $m' \in \{\text{aFRRpos}, \text{aFRRneg}, \text{spot}\}$
$\delta^{\text{rm,U}}$	auxiliary variable for minimum load requirement of controllable unit provision of $rm \in \{\text{aFRRpos}, \text{aFRRneg}\}$
$\theta$	auxiliary variable for <i>VaR</i> modelling

## A.1 Highlights

- Application of multi-stage stochastic programming to trading on electricity markets.
- Consideration of expected value and (conditional) value at risk in target function.
- Trading strategies for reserve and spot markets under different risk preferences.
- Risk hedging by trading on the day-ahead, higher expected value on the intraday.
- Discussion of rationales for reserve market participation in a multi-market setting.

## A.2 Modelling of Reserve Prices

For each season and reserve direction, a separate model is estimated from empirical data. As an example, Table 3 presents the coefficients, standard error and t-value of the robust estimation for the negative product in the transition season. The standard errors and t-values of all coefficients suggest high significance. The residuals of the estimation  $\epsilon_t$  are considered as a stochastic process, which consists of three regimes: A base regime as well as a downward and an upward jump regime, with jump regime observations defined as observations more than two standard deviations away from the mean. Figure 11 presents the residuals of the conducted robust estimation for the negative product in the transition season.

Table 4 presents the residual standard errors to compare the used model configuration to less parsimonious ones. It can be observed that the overall model fits support the literature and the hypothesis that reserve prices are not completely explainable by the use of fundamental drivers as the residual standard errors are considerable. Yet, the model fit does not suffer significantly from only considering five explanatory variables (seasonal average, solar generation, residual load, lag 6, and a dummy for the distinction of weekdays and weekends). This observation remains valid for all seasons and both directions. Therefore, the stochastic residuals are estimated based on the parsimonious model configuration presented in Section 4.7.

Besides the distributional also the auto-regressive characteristics need to be modelled for the process to yield sound simulation results. Therefore, an Ornstein-Uhlenbeck process is estimated for the base and the jump regimes. Further, regime switching probabilities are derived from the historical data and used in a simulation of the stochastic residuals. Figure 12 presents the results of one simulation of the residuals.

In total, 1000 stochastic residual time series are simulated. These time series are used in the simulation of the reserve price scenarios for the respective type days. In accordance with Russo et al. (2021), three PV generation and coherent residual load levels are distinguished for each season and type of weekday, resulting in 18 type days in total. The levels of the exogenous variables and the stochastic residuals for the respective type day are fed into the additive model. Note, that the lag  $y_{t-6}$  enters the model as exogenous variable. To obtain a steady process with the stochastic components respected for accordingly, therefore the last step consists in simulating 15 days of each day type with the 1000 stochastic residual time series, respectively. Finally, the 1000 observations of the 15th day are clustered with k-means clustering ( $k = 10$ ), to obtain the reserve price scenarios used in the stochastic optimization.

Figures 13 and 14 present the empirically observed values for the transition months and the scenarios derived from the stochastic modeling for the days with medium forecasts for PV generation and residual load. Note, that on the one hand, with variation to low and high levels the reserve price levels become more pronounced. On the other hand, especially days with steep ramps of wind generation are not modelled in the stochastic process but are well contained in the empirical data. The main purpose of the scenario generation is to derive typical days and consistent reserve price patterns. In a real-world application, one would use day-ahead forecasts for the exogenous variables instead of seasonal averages and their variations in upward and downward direction.

Table 3: Coefficients for robust estimation of negative reserve product in transition season. All coefficients are significant.

Coeff.	Value	Std.Error	t-value
$c_s$	2.250	0.316	7.130
$\beta_1$	0.469	0.085	5.550
$\beta_2$	-0.066	0.020	-3.355
$\beta_3$	-0.628	0.077	-8.195
$\beta_4$	0.679	0.016	42.725
$\beta_5$	4.508	0.478	9.436
$\beta_6$	-0.428	0.146	-2.944
$\beta_7$	0.076	0.037	2.056
$\beta_8$	-1.169	0.117	-10.001

Table 4: Goodness-of-fit of the additive reserve price models with residual standard error of the robust estimation as a measure for model fit for the used model, alternative 1 (carbon price as additional explanatory variable), alternative 2 (coal price as additional explanatory variable), alternative 3 (clean dark spread as additional explanatory variable), and alternative 4 (carbon price and coal price as additional explanatory variables). No significant improvement of model fit by including additional explanatory variables is observed. Required data for currency exchange rates, carbon and coal prices taken from EPEX Spot (EPEX Spot, 2021) and investing.com (investing.com, 2021).

Season	Direction	Used model	Alt. 1	Alt. 2	Alt. 3	Alt. 4
Winter	negative	0.372	0.356	0.372	0.358	0.383
Transition	negative	0.298	0.301	0.302	0.297	0.297
Summer	negative	0.383	0.390	0.373	0.408	0.372
Winter	positive	0.360	0.356	0.358	0.353	0.353
Transition	positive	0.576	0.563	0.546	0.550	0.560
Summer	positive	0.534	0.536	0.545	0.538	0.520

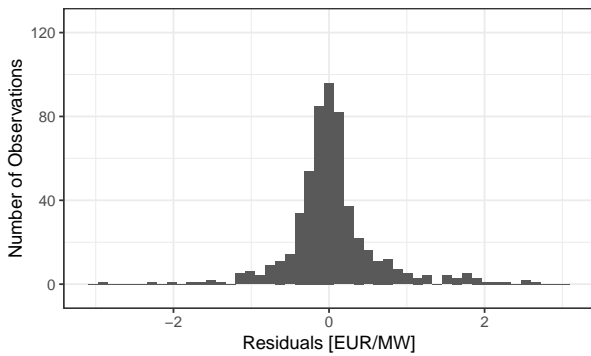


Figure 11: Residuals of the additive model estimation for the negative reserve product and transition season. The center, the outliers in upward direction and the outliers in downward direction are covered by the base regime, the upward jump regime and the downward jump regime, respectively.

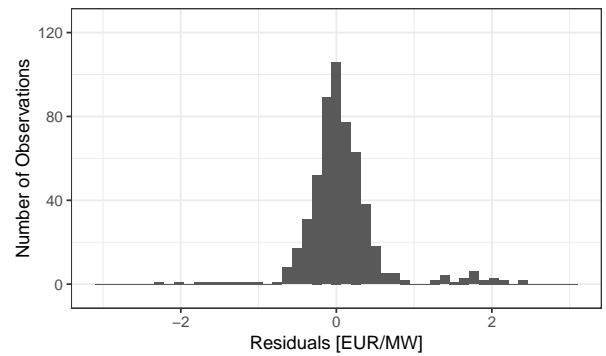


Figure 12: Residuals simulated with the stochastic process for the negative reserve product and transition season. The modeling yields a good fit to the distribution of the residuals in Figure 11. The strict definition of the regimes leads to a slight under-representation of values around two standard deviations away from the mean.

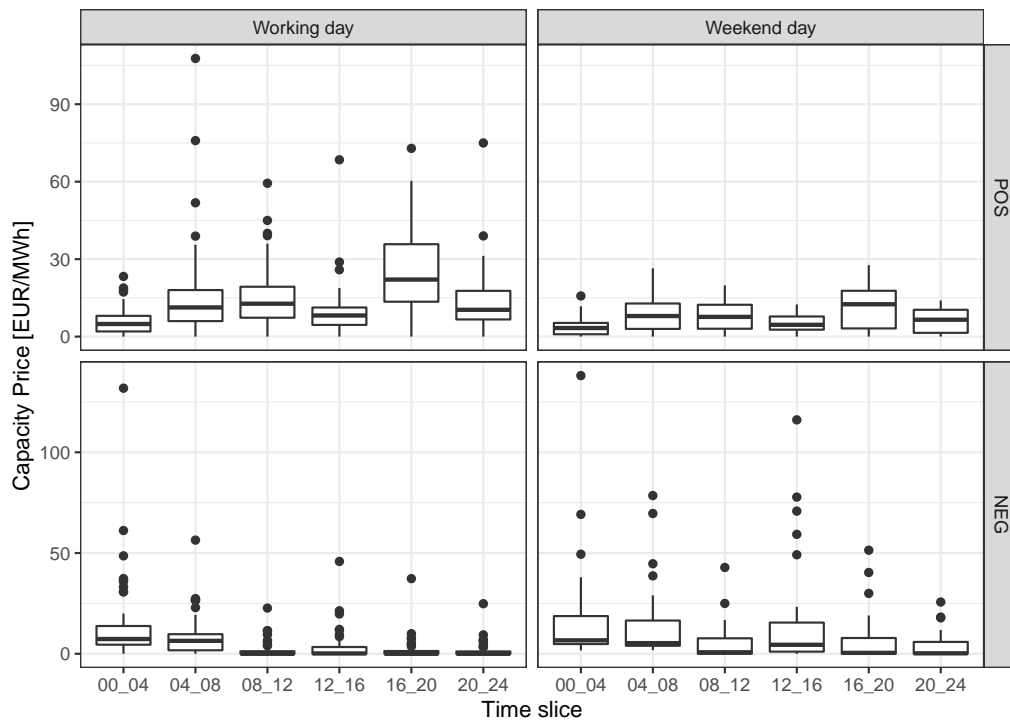


Figure 13: Boxplots of empirical reserve prices in the transition months of 2019, distinguished by reserve product and type of weekday ( $n = 1092$ ).

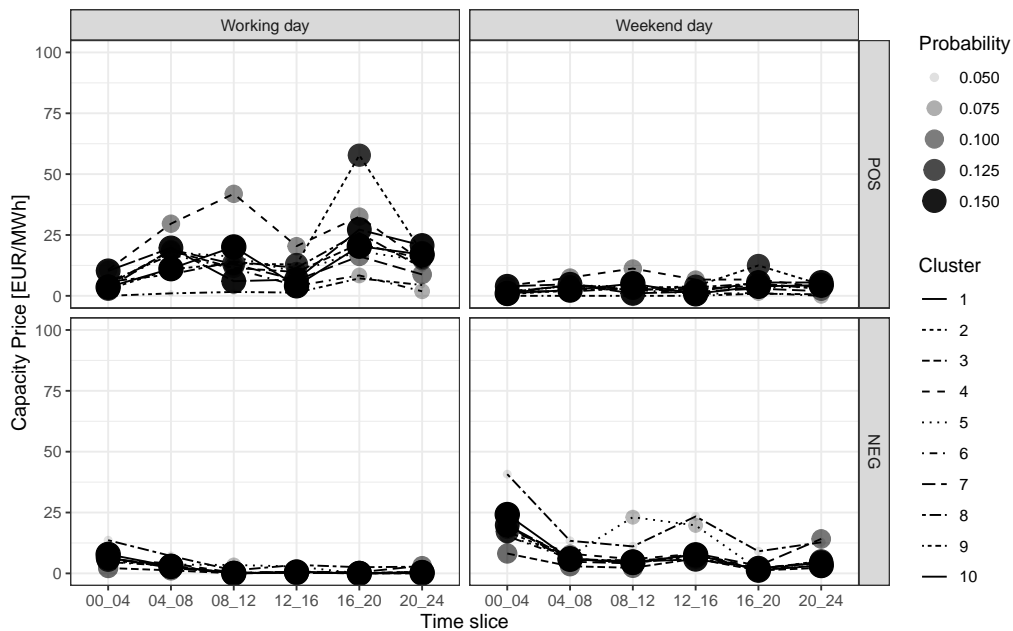


Figure 14: Scenarios derived from the stochastic modelling for the transition season on medium levels of PV generation and residual load, distinguished by reserve product and type of weekday. Reserve price scenarios for typeday *tra2* correspond to the left column.

### A.3 Definition and Modelling of Risk

The VaR  $\eta$  is defined as the  $(1-\alpha)$ -quantile of the contribution margin distribution, leading to the following definition for a discrete probability distribution:

$$VaR(\alpha, x) = \max \left\{ \eta : P(\omega | f(x, \omega) < \eta) \right\}, \quad \forall \alpha \in (0, 1) \quad (52)$$

with  $f$  the distribution of contribution margins, the deterministic parameters  $x$  and the stochastic parameters  $\omega$  in probability space  $\Omega$ . Including the VaR into the developed approach requires an extension of the model described in the previous sections. However, it is mainly a modification of the target function, two additional sets of constraints and auxiliary variables added to consider for the calculation of the VaR. The target function is augmented by the variable  $\eta$ , that corresponds to the VaR. The target of optimization is now the weighted sum of expected value and the VaR, with  $\lambda \in (0, 1)$  as parameter for risk aversion (e.g.  $\lambda = 0.2$ ).

$$\max \quad (1 - \lambda) \cdot \mathbb{E}_{(i,j,k) \in \Omega}(\pi_{i,j,k}) + \lambda \cdot \eta \quad (53)$$

All constraints from above remain unchanged. In addition, the following two constraints are included in the model. Parameter  $\alpha$  represents the probability level of the VaR measure (e.g.  $\alpha = 0.95$ ),  $\theta_{i,j,k}$  is a binary variable equal to 1 if the contribution margin  $\pi_{i,j,k}$  in scenario  $(i, j, k)$  is lower than  $\eta$  and equal to 0 otherwise. With the means of 54 and 55, we ensure that with a probability of  $1 - \alpha$  percent the contribution margin is lower or equal  $\eta$ .

$$\sum_{i=1}^I pr_i \sum_{j=1}^J pr_j \sum_{k=1}^K pr_k \cdot \theta_{i,j,k} \leq 1 - \alpha \quad (54)$$

$$\eta - \pi_{i,j,k} \leq BIGM \cdot \theta_{i,j,k} \quad \forall (i, j, k) \in \Omega \quad (55)$$

The CVaR is defined as the expected value of the contribution margin in the  $(1 - \alpha)$  worst cases of the distribution, or the expected value if the contribution margins fall below  $\eta$ , leading to following definition for a discrete probability distribution:

$$CVaR(\alpha, x) = \max \left\{ \eta - \frac{1}{1 - \alpha} \cdot \mathbb{E}_{\omega \in \Omega} \{ \max\{\eta - f(x, \omega), 0\} \} \right\} \quad (56)$$

with the Value-at-Risk  $\eta$  at  $\alpha$ -level ( $\alpha \in (0, 1)$ ), the deterministic parameters  $x$  and the stochastic parameters  $\omega$  in probability space  $\Omega$ . The main advantage of using the CVaR instead of the VaR, besides the coherence, consists in the consideration of so-called fat-tails in the distribution of contribution margins.

## A.4 Exemplary Scenario Tree

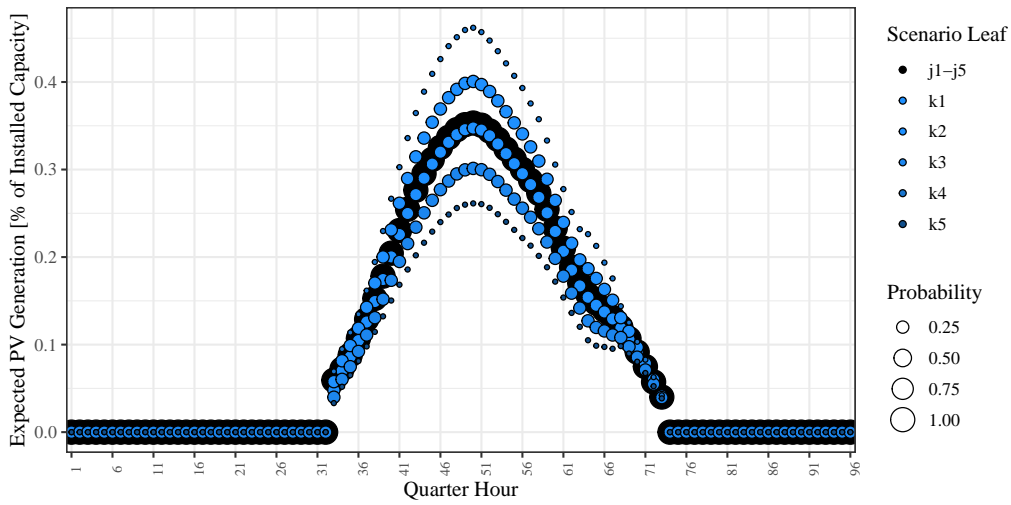


Figure 15: PV generation scenarios derived from the stochastic modelling for the transition season on medium level of PV generation (e.g., *tra2*). The scenario tree captures the daily pattern as well as forecast updates in the intraday stage.

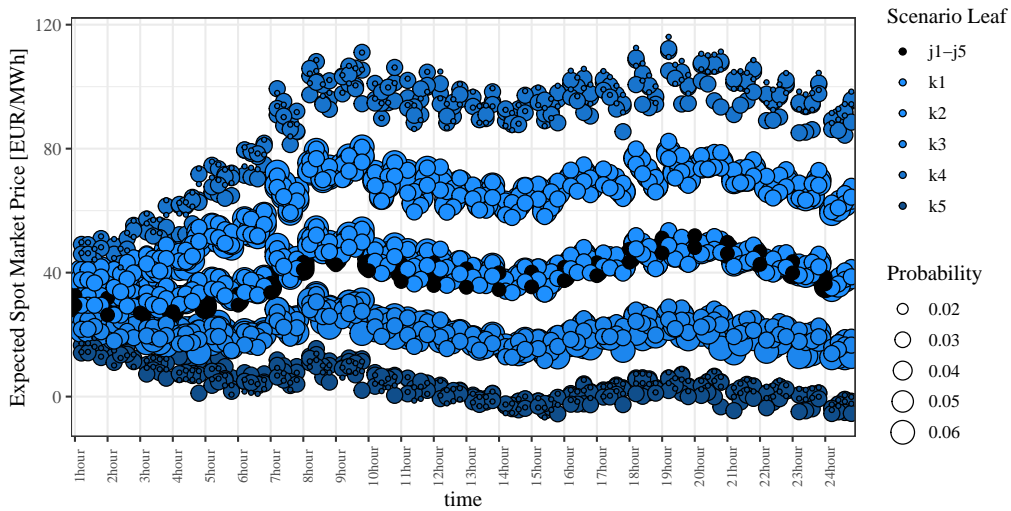


Figure 16: Spot price scenarios derived from the stochastic modelling for the transition season on medium levels of PV generation and residual load. The scenario tree is arbitrage-free and captures the daily pattern as well as the intra-hourly patterns of the quarter-hourly intraday prices.



Table 5: Quantitative results for efficient frontier under different risk aversion levels ( $\lambda$ ) and different intervals considered for the risk metric CVaR ( $\alpha$ ). The columns  $\Delta\mathbb{E}(\Pi)$  and  $\Delta\text{CVaR}$  present the differences of the strategies with risk aversion in comparison to the according risk neutral optimization.

Risk metric	$\alpha$	$\lambda$	$\mathbb{E}(\Pi)$	$\Delta\mathbb{E}(\Pi)$	CVaR	$\Delta\text{CVaR}$
Unit	[%]	[%]	[EUR/day]	[EUR/day]	[EUR/day]	[EUR/day]
risk neutral	85	0	31033	-	-44220	-
CVaR	85	10	29805	-1228	-16457	27763
CVaR	85	25	25658	-5375	6781	51000
CVaR	85	50	24822	-6210	8897	53116
risk neutral	85	0	31033	-	-48410	-
CVaR	90	10	29130	-1903	-13701	34709
CVaR	90	25	25374	-5659	7259	55668
CVaR	90	50	24821	-6212	8611	57021
risk neutral	85	0	31033	-	-51295	-
CVaR	95	10	29274	-1758	-15965	35330
CVaR	95	25	25922	-5110	4708	56003
CVaR	95	50	24730	-6302	7936	59231

## A.5 Additional Results

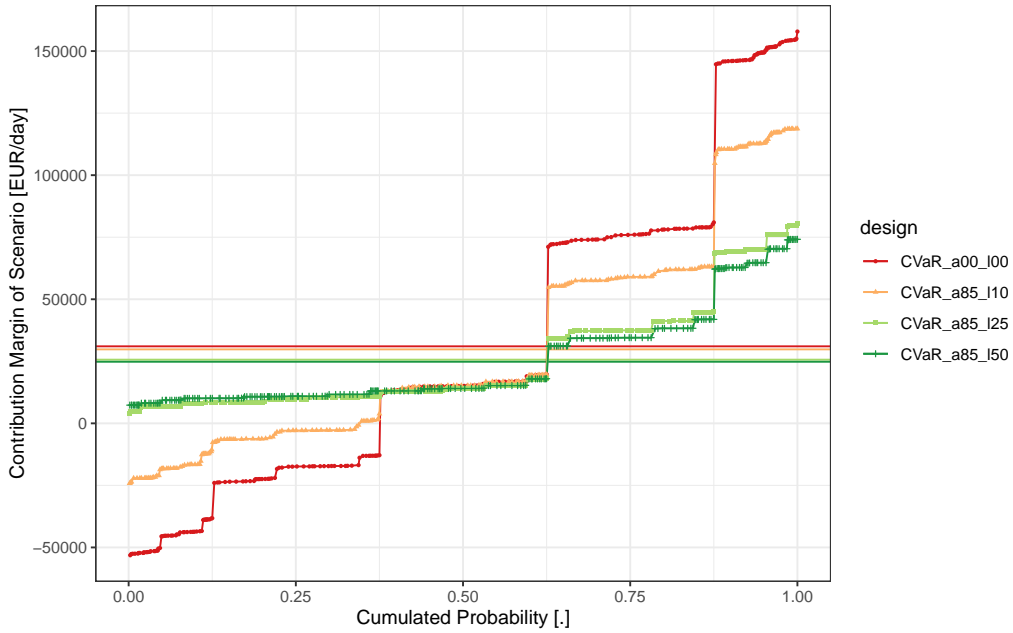


Figure 17: Empirical Cumulative Distributions of Contribution Margins throughout scenarios for trading strategies considering the  $\alpha = 85\%$  level for the CVaR, medium weekday transition season (tra2).

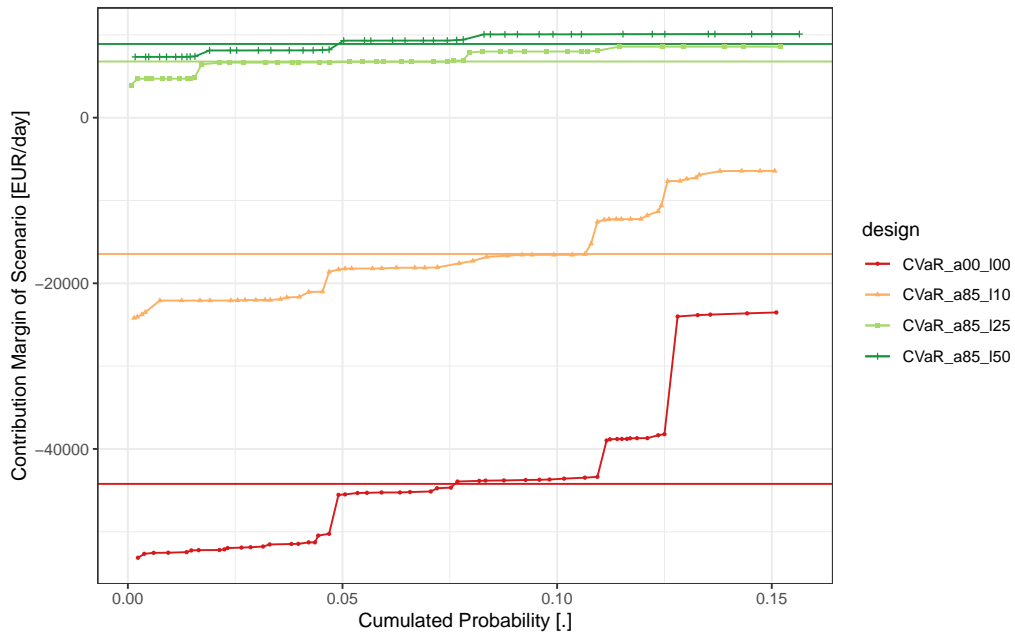


Figure 18: Empirical Cumulative Distributions of Contribution Margins in the 15 % of worst case scenarios (CVaR range), medium weekday transition season (tra2).

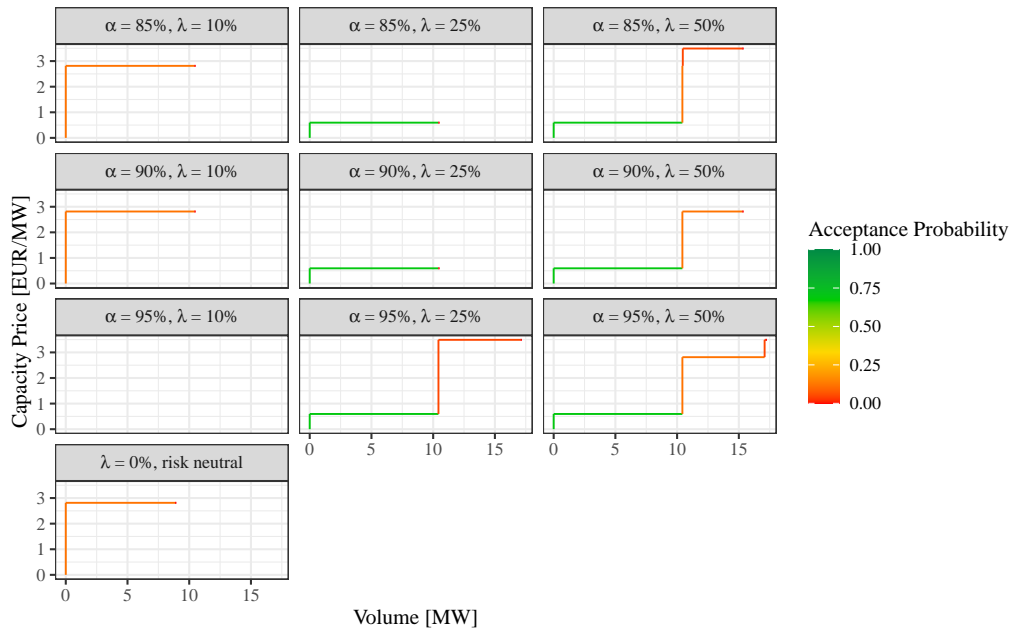


Figure 19: Reserve market (aFRRneg) bid curves for slice 12-16 for different levels of CVaR range ( $\alpha$ ) and risk aversion ( $\lambda$ ), working day with medium residual load, transition season (tra2).

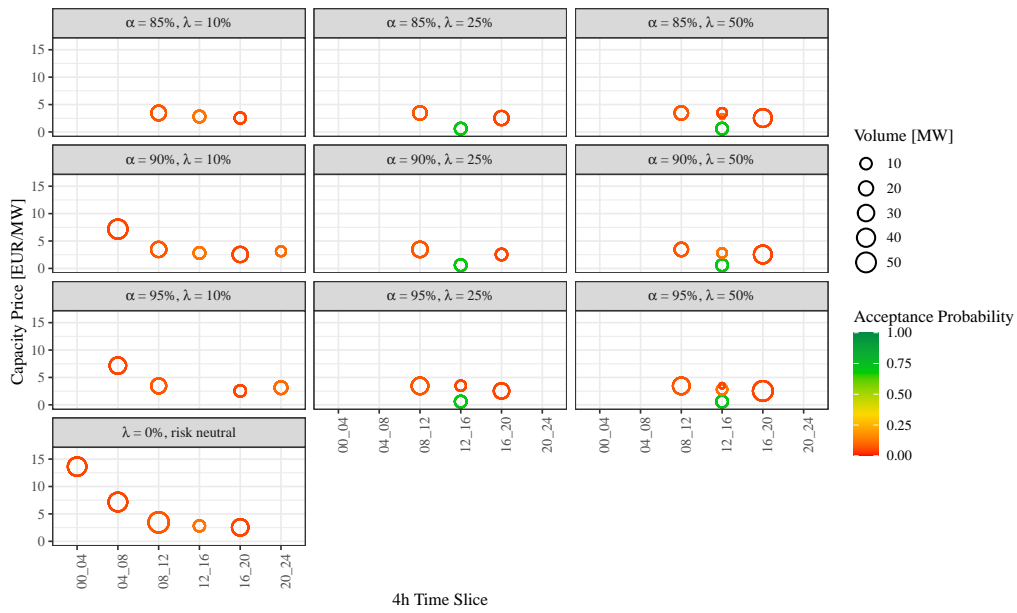


Figure 20: Reserve market (aFRRneg) bids for different levels of CVaR range ( $\alpha$ ) and risk aversion ( $\lambda$ ), working day with medium residual load, transition season (tra2).

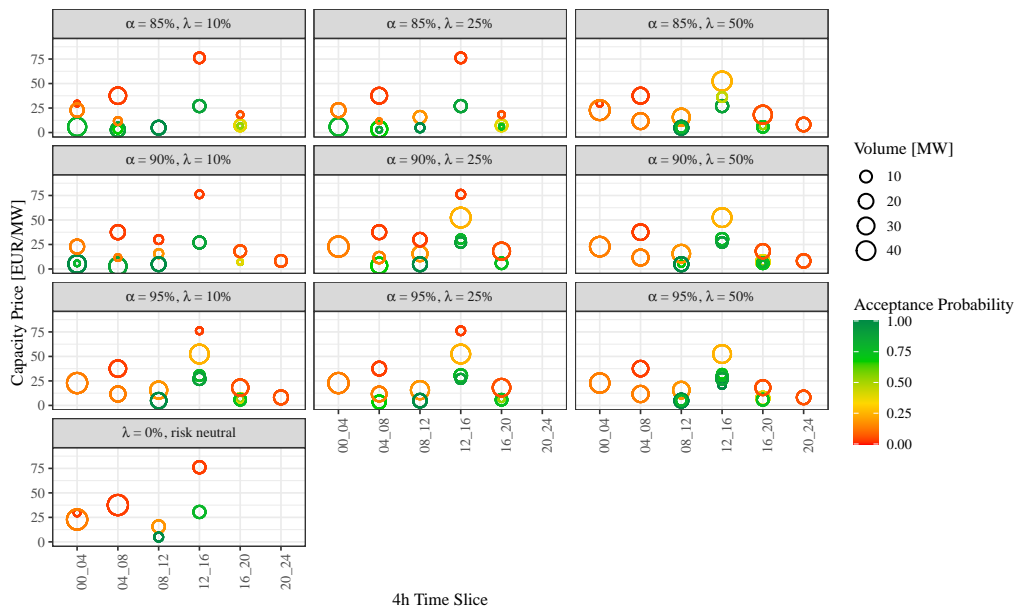


Figure 21: Reserve market (aFRRneg) bids for different levels of CVaR range ( $\alpha$ ) and risk aversion ( $\lambda$ ), weekend day with high residual load, summer season (sum6).

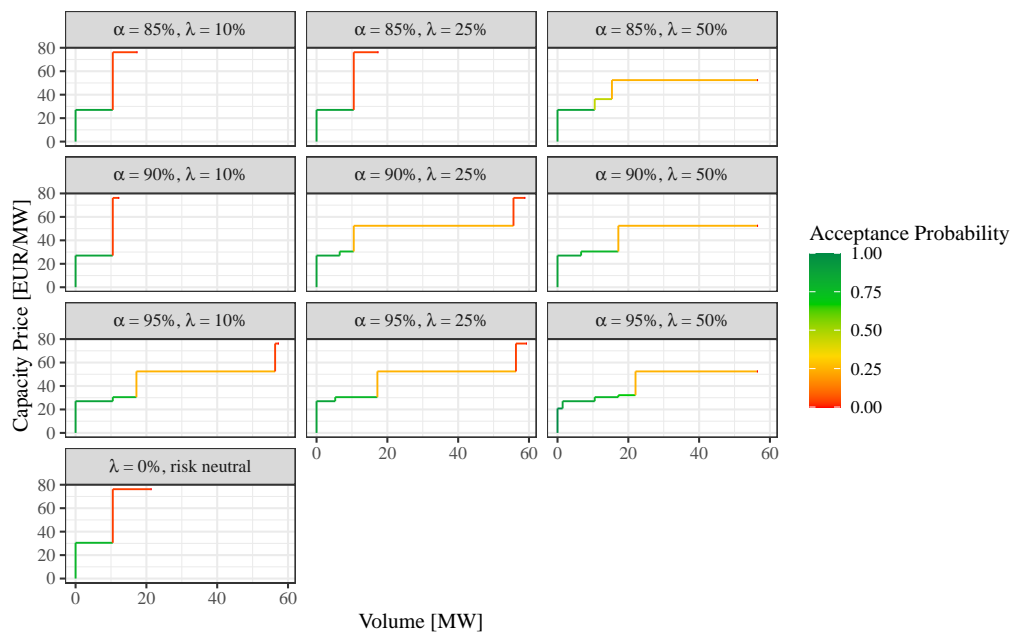


Figure 22: Reserve market (aFRRneg) bid curves for slice 12-16 for different levels of CVaR range ( $\alpha$ ) and risk aversion ( $\lambda$ ), weekend day with high residual load, summer season (sum6).

# Working Paper Series in Production and Energy

---

## recent issues

- No. 57** Marianna Russo, Emil Kraft, Valentin Bertsch, Dogan Keles: Short-term Risk Management for Electricity Retailers Under Rising Shares of Decentralized Solar Generation
- No. 56** Anthony Britto, Joris Dehler-Holland, Wolf Fichtner: Optimal Investment in Energy Efficiency as a Problem of Growth-Rate Maximisation
- No. 55** Daniel Fett, Christoph Fraunholz, Dogan Keles: Diffusion and System Impact of Residential Battery Storage under Different Regulatory Settings
- No. 54** Joris Dehler-Holland, Marvin Okoh, Dogan Keles: The Legitimacy of Wind Power in Germany
- No. 53** Florian Diehlmann, Markus Lüttenberg, Lotte Verdonck, Marcus Wiens, Alexander Zienau, Frank Schultmann: Public-Private Collaborations in Emergency Logistics: A Framework based on Logistical and Game-Theoretical Concepts
- No. 52** Florian Diehlmann, Patrick S. Hiemsch, Marcus Wiens, Markus Lüttenberg, and Frank Schultmann: A Novel Approach to Include Social Costs in Humanitarian Objective Functions
- No. 51** Florian Diehlmann, Miriam Klein, Marcus Wiens, Markus Lüttenberg, and Frank Schultmann: On the Value of Accurate Demand Information in Public-Private Emergency Collaborations
- No. 50** Maximilian Schücking, Patrick Jochem: Two-Stage Stochastic Program Optimizing the Total Cost of Ownership of Electric Vehicles in Commercial Fleets
- No. 49** Max Kleinebrahm, Jacopo Torriti, Russell McKenna, Armin Ardone, Wolf Fichtner: Using neural networks to model long-term dependencies in occupancy behavior
- No. 48** Nico Lehmann, Jonathan Müller, Armin Ardone, Katharina Karner, Wolf Fichtner: Regionalität aus Sicht von Energieversorgungsunternehmen - Eine qualitative Inhaltsanalyse zu Regionalstrom in Deutschland
- No. 47** Marcus Wiens, Farnaz Mahdavian, Stephen Platt, Frank Schultmann: Optimal Evacuation-Decisions Facing the Trade-Off between Early-Warning Precision, Evacuation-Cost and Trust – the Warning Compliance Model (WCM)
- No. 46** Phuong Khuong, Fabian Scheller, Russell McKenna, Dogan Keles, Wolf Fichtner: Willingness to pay for residential PV: reconciling gaps between acceptance and adoption
- No. 45** Christoph Fraunholz, Emil Kraft, Dogan Keles, Wolf Fichtner: The Merge of Two Worlds: Integrating Artificial Neural Networks into Agent-Based Electricity Market Simulation

---

The responsibility for the contents of the working papers rests with the author, not the institute. Since working papers are of preliminary nature, it may be useful to contact the author of a particular working paper about results or caveats before referring to, or quoting, a paper. Any comments on working papers should be sent directly to the author.

**Impressum**

Karlsruher Institut für Technologie

Institut für Industriebetriebslehre und Industrielle Produktion (IIP)  
Deutsch-Französisches Institut für Umweltforschung (DFIU)

Hertzstr. 16  
D-76187 Karlsruhe

KIT – Universität des Landes Baden-Württemberg und  
nationales Forschungszentrum in der Helmholtz-Gemeinschaft

Working Paper Series in Production and Energy  
**No. 58**, June 2021

ISSN 2196-7296