

## PERSPECTIVE

# Toward Programmable Infrastructure for Organic and Flexible 6G Networks

FABIAN EICHHORN<sup>1</sup>, (Member, IEEE), ROLAND BLESS<sup>2</sup>, (Member, IEEE), PAUL SEEHOFER<sup>2</sup>, (Graduate Student Member, IEEE), MICHAEL GUNDALL<sup>3</sup>, DANIEL LINDENSCHMITT<sup>4</sup>, BASTIAN BLOESSL<sup>5</sup>, (Member, IEEE), DAVID VOLZ<sup>5</sup>, NAVID KESHTIARAST<sup>6</sup>, (Graduate Student Member, IEEE), HENDRIK BORCHERT<sup>7</sup>, MARKUS PETRI<sup>7</sup>, ELENA-RAMONA MODROIU<sup>8</sup>, (Member, IEEE), JOEL JOHN<sup>8</sup>, HOSSEIN MOHAMMADALIZADEH<sup>9</sup>, THEO RADIG<sup>9</sup>, LEONARD PAELEKE<sup>9</sup>, (Graduate Student Member, IEEE), HEINER ACKERMANN<sup>10</sup>, DANIEL HAUER<sup>10</sup>, MARIUS-IULIAN CORICI<sup>1,8</sup>, MARINA PETROVA<sup>6</sup>, (Member, IEEE), THOMAS MAGEDANZ<sup>1,8</sup>, (Senior Member, IEEE), AND HANS D. SCHOTTEN<sup>3,4</sup>, (Member, IEEE)

<sup>1</sup>Fraunhofer Institute for Open Communication Systems, 10589 Berlin, Germany

<sup>2</sup>Karlsruhe Institute of Technology, 76131 Karlsruhe, Germany

<sup>3</sup>German Research Center for Artificial Intelligence GmbH, 67663 Kaiserslautern, Germany

<sup>4</sup>RPTU Kaiserslautern–Landau, 67663 Kaiserslautern, Germany

<sup>5</sup>Technische Universität Darmstadt, 64289 Darmstadt, Germany

<sup>6</sup>RWTH Aachen University, 52072 Aachen, Germany

<sup>7</sup>Leibniz-Institut für innovative Mikroelektronik (IHP), 15236 Frankfurt (Oder), Germany

<sup>8</sup>Technische Universität Berlin, 10587 Berlin, Germany

<sup>9</sup>Hasso Plattner Institute (HPI), Faculty of Digital Engineering, University of Potsdam, 14482 Potsdam, Germany

<sup>10</sup>Fraunhofer Institute for Industrial Mathematics, 67663 Kaiserslautern, Germany

Corresponding author: Fabian Eichhorn (fabian.eichhorn@fokus.fraunhofer.de)

This work was financial support by German Federal Ministry of Research, Technology and Space (BMFTREN) through the Project “Open6GHub” under Grant 16KISK003K, Grant 16KISK004, Grant 16KISK006, Grant 16KISK009, Grant 16KISK010, Grant 16KISK011, Grant 16KISK012, Grant 16KISK013, and Grant 16KISK014, and through the Project “Open6GHub+” under Grant 16KIS2406 and Grant 16KIS2407.

**ABSTRACT** The next generation of wireless mobile networks will be driven by software and infrastructure virtualization. At the same time, the underlying hardware will become more diverse. Edge, intermediate, and central network nodes will allow distributed deployments of scale never seen before. Non-terrestrial networks, nomadic networks, and networks in networks promise more dynamicity, changing their topologies over time in predictable and unpredictable ways. To handle complexity and dynamicity, a highly flexible and adaptable network is required. The key enablers of this complex digital communication system will be programmable infrastructures. From programmable access and flexible backhubs to zero-touch, adaptable, and resilient control planes, we conducted research into advanced programmability at different layers of the network, within the Open6GHub project. In this article, we present innovative solutions for advanced programmable network infrastructure and show why they are essential for our vision of the programmable infrastructure of future wireless mobile networks.

**INDEX TERMS** 6G, mobile wireless networks, organic 6G networks, programmable infrastructure, programmability, reconfigurability, software-defined networks, software-defined radio.

## I. INTRODUCTION

Programmable infrastructures are becoming the foundation of communication networks through technologies like Software Defined Networking (SDN) and Network Function Virtualization (NFV) [1], [2], [3]. This is the case for fifth

The associate editor coordinating the review of this manuscript and approving it for publication was Mostafa Zaman Chowdhury.

and future generations of wireless mobile networks [1]. For example, the 5G System (5GS) uses a programmable User Plane Function (UPF), separated from the control plane via a dedicated interface. Many Mobile Network Operators (MNOs) deploy their core networks as Virtual Network Functions (VNFs) in data centers, using virtualized infrastructure. Furthermore, many public and private network operators take advantage of SDN technologies to create networks that can react more flexibly to the various demands for traffic and services and allow for more efficient use of network resources [5], [6], [7]. But 6G networks will require more advanced programmability, allowing more than these limited adjustments [3], [8]. They must be able to change dynamically, efficiently control traffic, and be able to self-heal [9]. As networks become more complex, programmability of all components of the end-to-end system should be considered and feasible approaches need to be investigated. From Radio Access Network (RAN) to front- and backhaul, and from edge to core, mobile wireless networks form a complex system whose individual components require programmability approaches customized to their specific characteristics.

In this article, we present several innovative programmability solutions to improve the adaptability of 6G networks. Our project Open6GHub was the context for research and demonstration of these solutions. Programmable RAN allows virtualization of radio resources for efficient utilization. Flexible, dependable backhauls provide the low latency, high throughput connectivity between edge and central network nodes. Zero-touch control plane connectivity is essential to create a reliable but dynamic control plane, where nodes can join and leave the network aligned with network dynamics without affecting operation. Ideally, Non-Terrestrial Network (NTN) components should also be integrated into this control plane connectivity, so that 6G resources can be controlled by a coherent 6G control plane. A unified, stream-lined, control plane continuum architecture for both core and radio access networks improves signaling paths and helps coordinate decision points. NFV migration and placement optimization improve the utilization of edge, network, and central resources. Adaptive networking and reconfigurability concepts such as nomadic networks allow the network infrastructure to be changed through mobile nodes and adjustable links.

When all of these technologies are combined, on top of already established programmability solutions, full end-to-end network programmability can be achieved. This enables a higher degree of autonomy, flexibility, and efficiency in mobile network operation, facilitating the use of artificial intelligence and machine learning to create advanced autonomous networks.

The remainder of this article is structured as follows. Section II discusses the concept and state-of-the-art of programmable networks as relevant to the presented work. Section III gives an overview of advanced RAN programmability. Next, Section IV discusses front- and backhaul

programmability. The control plane fabric is introduced in Section V followed by the discussion of control plane services in Section VI. VNF migration and placement solutions are presented in Section VII. In Section VIII, we present approaches to adaptive network deployments. Section IX discusses physical and logical reconfigurability. Finally, we explain how these technologies come together to enable the next generation of mobile communication networks in Section X, before concluding the article in Section XI.


## II. PROGRAMMABILITY OF NETWORKS

A system is programmable if its behavior can be changed by rewriting the programs it executes or by replacing them against different ones. The term *network programmability* is used to denote the capability to change the behavior of a communication or computer network [10], [11]. This is achieved, through altering the behavior of network devices by replacing, updating, or influencing their functionality during run-time through an interface such as an Application Programming Interface (API). These interfaces can be accessible locally or remotely depending on the device.

The behavior of a network can be changed in various ways. One can alter the behavior of the network itself, i.e., the way it transports data: Changing the way data flows from source to destination, e.g., by altering routing tables or forwarding rules as in SDN [12], [13]. SDN tries to increase the flexibility of network behavior by decoupling parts of the router's control plane from its hardware. Routing decisions are outsourced to an SDN controller that can be programmed by the operator, whereas the routing protocols and routing logic implemented by the vendor on the router could not be changed easily, i.e., its functionality could be considered to be fixed. The widely used OpenFlow protocol standard [14] provides an API to configure the forwarding rules inside switches or routers. The programs (SDN apps) running on an SDN controller can then flexibly change the routing behavior, even down to the fine-granular level of individual flows, and also allow for fast development cycles. This is shown in Figure 1 in an abstract network whose nodes are programmed by a controller entity. The controller usually communicates with its controlled nodes via a dedicated control plane network that is separated from regular data plane traffic. Moreover, real-world deployments use multiple distributed controller entities for scalability and redundancy reasons, but this comes at the cost of high complexity, complicated interdependencies, and intricate failure scenarios [7].

Another approach for network programmability is *Segment Routing over IPv6 (SRv6)* [15], where flexible routing policies can be combined with a flexible invocation of certain functions in intermediate systems. A Segment Routing Header contains a list of Segment IDs that can encode path segments or function invocations at certain segment routing endpoint locations. These functions are, for example, encapsulation or decapsulation functions combined with certain lookup behaviors. A practical application is suggested in [16] where SRv6 can be used to realize the user plane

of mobile networks (UPF) and its statelessness is used to provide a more efficient replacement for GTP-U. Compared to SDN this approach allows for more distributed realizations, since Segment IDs can be distributed using ordinary routing protocols.

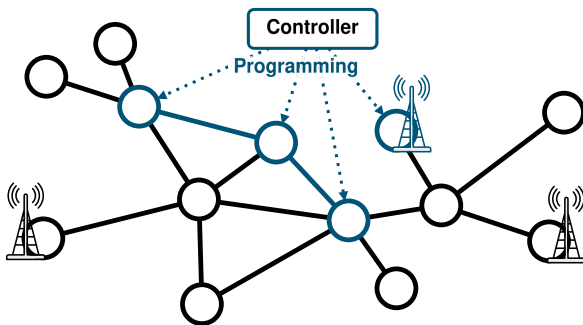


**FIGURE 1.** SDN: The data plane traffic of a network is altered by a centralized controller programming forwarding decisions.

However, approaches such as SDN and SRv6 Network Programming are limited to the use of existing forwarding functionality inside the SDN or SRv6 routers, i.e., it cannot arbitrarily change packet processing within the data plane. For example, only certain IPv4 and IPv6 header fields can be used for match filters, and there are limitations of the available functionality with respect to packet handling such as Quality of Service (QoS) support.

To allow directly altering the processing of packets, there exist approaches such as Programming Protocol-independent Packet Processors (P4) and Extended Berkeley Packet Filters (eBPF) [18]. P4 is an open source programming language developed under the Linux Foundation and mainly targeted at intermediate systems such as routers and switches [19] whereas eBPF supports programmability mainly in the end-systems. Nevertheless, P4 is also used in programming hardware solutions, so-called infrastructure or data processing units, that are often used in end-systems in (edge) cloud computing contexts. The advantage of P4 and eBPF over early approaches such as the Click Modular Router [20] is their conceptual platform independence.

This principle of modularizing and isolating software functions has also shaped modern carrier networks and forms the basis of NFV. In NFV, traditional network middleboxes are replaced by VNFs – software implementations of network functions that run on virtual machines or containers (then called Cloud-native Network Function (CNF) [18]) hosted on commodity hardware. These VNFs can be combined and orchestrated into end-to-end Network Services (NSs), allowing operators to create complex service chains with flexible deployment, scaling, and management, while reducing the dependency on specialized network appliances [21]. The flexibility of NFV also enables the execution of non-network-specific application workloads, extending the use case beyond traditional Network Functions (NFs). Building on this capability, the same virtualized infrastructure can

also support application-level services, a broader concept commonly referred to as edge computing or in-network cloud [22]. Since end devices often have limited computational, storage, and energy resources, some services or service functions cannot be executed locally and must run elsewhere in the network. With NFV and edge computing, these workloads can be flexibly placed on network nodes, edge clouds, or data centers, taking into account both available resources and latency requirements. This approach allows services to be executed closer to users when necessary, improving responsiveness and user experience while leveraging the full potential of the virtualized infrastructure. This concept of edge computing is visualized in Figure 2, where some of the network nodes have cloud capabilities indicated by a cloud symbol. While the in-network cloud concept allows the provision of Over-the-Top (OTT) services to users, the available resources can also be leveraged by the network itself, e.g., through the dynamic placement of VNFs based on load patterns.

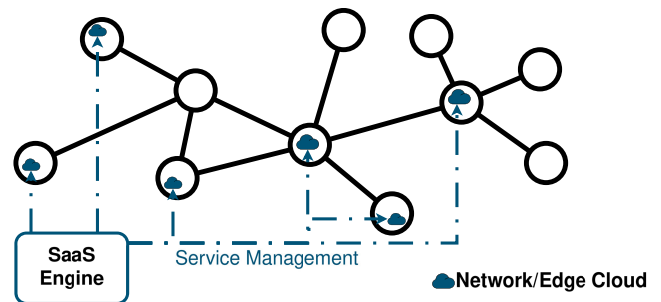


**FIGURE 2.** Edge & network clouds: Throughout the network there are nodes with computation and storage capabilities, available to connected devices. The life cycle of the services is managed by a Software as a Service (SaaS) engine.

Thanks to the adoption of NFV in both the control and data plane, the behavior of the network can also be adapted by dynamically modifying, scaling, or redeploying VNFs. Such flexibility is facilitated by Management and Orchestration (MANO) frameworks, including Open Source Management and Orchestration (MANO) (OSM) [23] or Open Network Automation Platform (ONAP) [24]. These frameworks can orchestrate NSs that combine traditional hardware-based network functions, VNFs, and CNFs, allowing operators to balance performance and flexibility according to service requirements.

Figure 3 shows an example of a MANO system managing NFs across multiple nodes of a network. An NFV orchestrator uses a set of VNF managers to deploy network services composed of multiple VNFs. The Virtual Infrastructure Manager (VIM) takes care of provisioning the virtual resources from the infrastructure. Operations and Business Support Systems (OSS/BSS) (not shown) steer the MANO system.

Several Standards Development Organizations (SDOs) and open source projects work together to enable the creation of so-called Telco Clouds [25], [26]. The “European

212 Telecommunications Standards Institute (ETSI) Industry  
 213 Specification Group NFV has been the primary standardiza-  
 214 tion body responsible for the development of [NFV] [...]”  
 215 [26]. Their work on MANO is the reference for OSM. The  
 216 3rd Generation Partnership Project (3GPP) introduced the  
 217 Service Based Architecture (SBA) with the 5GS to create a  
 218 NFV friendly system, but the architecture is still influenced  
 219 by the previous generations and cannot fully take advantage  
 220 of this paradigm [27]. SDN and NFV MANO rely on a control  
 221 plane network that must be configured correctly for each  
 222 component to be controllable. But in our view, the complexity  
 223 and dynamicity of 6G networks will make the establishment  
 224 and maintenance of the control plane network exceedingly  
 225 difficult and flexible, autonomous solutions are needed.

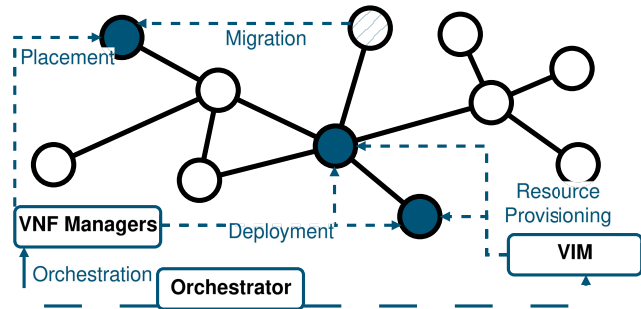


**FIGURE 3.** NFV MANO: an NFV orchestrator deploys a network service through VNF managers using resources provided by a VIM. It makes placement decisions depending on available resources and the requirements of the service. When an existing NF’s placement needs to be changed, it can be migrated or re-deployed to another node.

226 With Cloud RAN, similar ideas are applied to the RAN.  
 227 The first goal was to improve resource usage and energy  
 228 efficiency through the separation of Remote Radio Head  
 229 (RRH) and Based Band Unit (BBU), to cloudify the BBUs  
 230 and serve multiple RRHs from a single location [28], [29].  
 231 In the context of 5G, the RAN is further split into Radio  
 232 Unit (RU), Distributed Unit (DU) and Central Unit (CU),  
 233 providing additional options for functional deployment in  
 234 so-called splits and potential for virtualization. However,  
 235 virtualization of the RAN is non-trivial, given the fact that  
 236 components like the DU implement signal processing tasks  
 237 that are computationally intensive and have tight real-time  
 238 constraints.

239 In addition, further programmability of cellular access  
 240 networks comes with the introduction of Open RAN [30],  
 241 which specifies a disaggregated architecture with open  
 242 interfaces between RU, DU and CU, promoting vendor  
 243 independence and flexibility. It introduces the real- and non-  
 244 real-time RAN Intelligent Controllers (RICs) allowing the  
 245 deployment of xApps and rApps in real- and non-real-time  
 246 control loops of the RAN. Together, virtualization of the  
 247 RAN and the introduction of xApps and rApps, ask for  
 248 flexible software solutions that can adapt dynamically to  
 249 different load situations and utilize heterogeneous systems for  
 250 signal processing and network management. However, these  
 251 additional control loops could potentially conflict with core


252 network decisions, and the RAN-Core coordination has to be  
 253 strengthened to prevent service degradation.

254 In addition, the behavior of the infrastructure as such  
 255 is changed through programmed adaptation, e.g., changing  
 256 lightpaths in optical networks [31], or sending Unmanned  
 257 Aerial Vehicles (UAVs) carrying radio equipment to specific  
 258 locations to meet coverage and service demand under  
 259 automatic, programmed control – not just manually [32].  
 260 We subsume this under the term *reconfiguration*. Figure 4  
 261 illustrates how a network topology is altered through recon-  
 262 figuration: nodes and connections are added and removed.

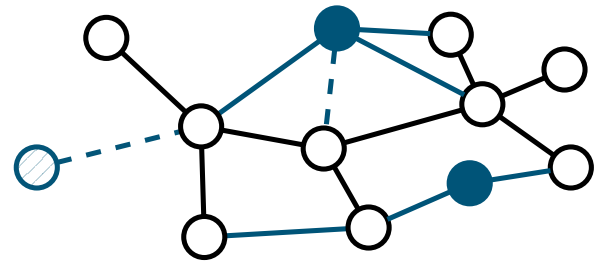

**FIGURE 4.** Network reconfiguration: The network topology is altered programmatically. Nodes and links in blue are added or altered. Hatched nodes and dashed links are removed.

263 Bringing these technologies together, as illustrated in  
 264 Figure 5, we can appreciate the capabilities of existing  
 265 network programmability solutions. Through these, many  
 266 new use cases have been enabled and many issues of static  
 267 networks have been addressed. But there is still work to be  
 268 done. In the following sections, we discuss several solutions  
 269 under investigation to push network programmability further  
 270 towards the capabilities required for future 6G networks and  
 271 beyond.

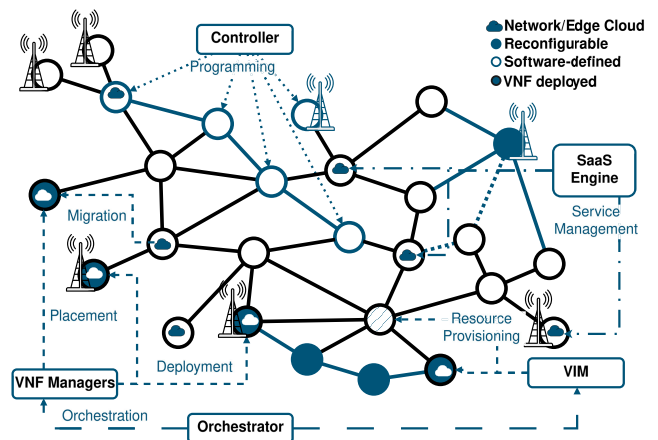

**FIGURE 5.** Programmable networks: SDN, Edge & network clouds, Reconfigurability and MANO.

### III. PROGRAMMABLE RADIO ACCESS NETWORKS

272 RANs are evolving at a fast pace. Toward 6G, they promise to  
 273 offer greater flexibility, programmability, higher bandwidth,  
 274 and operation on new frequency bands. However, testbeds  
 275

for these systems do not match this progress, limiting real-world experimentation and performance evaluation of emerging technologies. While powerful hardware platforms are available, software implementations lag behind. Existing testbeds and frameworks often do not simultaneously provide end-to-end system integration, high throughput, and real-time operation. To address this gap, we focus on programming frameworks and experimentation platforms that enable the development of high-performance wireless communication systems using the available compute platforms (i.e., CPUs, GPUs, and FPGAs).

### A. FutureSDR

FutureSDR<sup>1</sup> is a novel Software-Defined Radio (SDR) framework designed for heterogeneous architectures. This heterogeneity spans three dimensions: platforms (e.g., Android, Windows, Linux, and the web), processor architectures (e.g., x86, ARM, and WebAssembly), and compute types (e.g., CPU, FPGA, and GPU). FutureSDR is implemented in Rust, a modern, memory-safe, strongly typed systems programming language that provides first-class support for asynchronous programming. Despite its novel design, the main abstractions of FutureSDR are familiar to practitioners in the domain. It uses *blocks*, which encapsulate individual steps in a signal-processing chain, such as filters, arithmetic operations, or synchronizers. These blocks expose input and output ports that can be connected to form a *flowgraph*. Individual signal processing steps are executed as *tasks* that are scheduled by the user-space application, enabling FutureSDR to implement custom scheduling strategies tailored to the specific application. Such schedulers can exploit knowledge of the application's data flow to optimize for different performance objectives (e.g., balancing throughput and latency), which is not possible with existing frameworks like GNU Radio.

While FutureSDR is primarily a CPU-based framework, it is the first to enable efficient integration of hardware accelerators such as GPUs and FPGAs. This is achieved through support for custom buffer implementations that interface directly with accelerator memory, like staging buffers for GPU integration or DMA buffers for FPGAs. FutureSDR blocks are not bound to a specific buffer implementation but can be instantiated with any buffer type that implements a common interface. This abstraction introduces no runtime overhead, as the compiler generates specialized code for each buffer type, eliminating the need for indirection through dynamic dispatch.

### B. IPEC

Inter-Processing Element Communication<sup>2</sup> (IPEC) is a framework for generating streaming-based FPGA accelerators with complex interconnect structures [33]. A DSL embedded in Python enables the user to describe a data-flow

graph of the overall computation. IPEC uses this information to generate a larger accelerator, which can comprise many specialized accelerators as well as heterogeneous protocols, memories, and interconnects.

IPEC interfaces with the open-source TaPaSCo [34] FPGA shell, which allows the generated systems to directly access available peripherals, such as HBM, 100G ethernet ports, or specialized RF hardware available on some devices.

In combination with FutureSDR, IPEC can provide acceleration by moving not only individual blocks of the signal-processing chain to the FPGA, but larger parts of the flowgraph including data-flow edges. This was demonstrated by implementing a physical-layer subsystem with the ability of moving parts of the flowgraph at runtime between FPGA and CPU using both frameworks [35].

### C. HELIX

While IPEC automates the process of creating hardware designs from processing elements, it does not itself provide the advanced signal-processing implementations required for state-of-the-art wireless communication systems. This gap is addressed by HELIX,<sup>3</sup> an FPGA-based experimentation platform with real-time capabilities [36]. It is built on AMD/Xilinx RFSoc-based systems, which are widely used in both research prototyping and practical wireless deployments. HELIX provides an integrated environment for high-bandwidth PHY processing, runtime control, and interoperability with external software stacks, and it can be used either as a standalone platform or as a component within O-RAN-style systems. Its design supports experimentation across different deployment modes and frequency ranges, including sub-6 GHz, 28 GHz, and 60 GHz, while retaining the flexibility to interface with additional frontends as they become available. Results show data rates of up to 1.2 Gbps with 418 MHz of bandwidth and 256-QAM modulation, as well as bidirectional end-to-end latencies down to 500  $\mu$ s. The versatility of the platform is demonstrated through its integration in research prototypes, including an Integrated Sensing And Communication (ISAC) testbed.

FutureSDR, IPEC, and HELIX are released as open-source software, supporting accessibility, reproducibility, and community-driven development.

### D. SCALABLE HARDWARE TRANSMISSION BUFFER DESIGN

6G promises ultra-high data rates with low latency while maintaining a high level of connectivity. While a software-based control plane is unavoidable for flexibility and programmability, a hardware accelerated data plane helps to meet 6G's strict requirements while keeping the energy budget in check. Especially crucial for the scalability of the data plane is the architecture of the transmission buffer in the Data Link Layer (DLL). The DLL handles important tasks

<sup>1</sup><https://github.com/futuresdr/futuresdr>

<sup>2</sup><https://git.esa.informatik.tu-darmstadt.de/ipec/ipec>


<sup>3</sup><https://github.com/IMDEANetworksWNG/HELIX>

379 such as resource scheduling and reliable transmission via  
 380 Hybrid Automatic Repeat Request (HARQ) and is part of  
 381 the DU.

382 While it is straightforward to scale a software-based  
 383 transmission buffer solution with the number of active  
 384 devices in the network, a hardware-based solution offers clear  
 385 advantages in throughput, latency and energy, albeit at a  
 386 higher implementation complexity. To address this we devel-  
 387 oped two sharded transmission (TX) buffer designs based on  
 388 singly linked lists (Fig. 7), which enable flexible memory  
 389 allocation for virtually arbitrary numbers of devices while  
 390 keeping the control overhead low [37]. Both designs support  
 391 parallel read/write operations, that is without any type of  
 392 memory access arbitration, and a dedicated delete operation,  
 393 ensuring efficient (H)ARQ handling. The first design stores  
 394 control information in dual-port SRAM (SRAM-based), the  
 395 second relies on register arrays (RA-based).


396 Synthesis results on a AMD Zynq UltraScale+ MPSoC  
 397 ZCU102 show that the SRAM-based design scales efficiently  
 398 to more than 100,000 queues, with detailed throughput and  
 399 latency evaluations performed for up to 512 queues. The  
 400 SRAM-based variant exhibits excellent scalability, while the  
 401 RA-based design achieves the lowest latency and highest  
 402 throughput at smaller scales. We observe mean packet sojourn  
 403 times as low as 15.6 ns (RA-based) and 33.2 ns under  
 404 moderate load, both well below the 100  $\mu$ s target for 6G.  
 405 Even under full load with 512 queues served in a round  
 406 robin fashion, average latencies remain within 42.7  $\mu$ s  
 407 (RA) and 17.5  $\mu$ s (SRAM), while sustaining throughputs  
 408 above 100 Gbps.

409 As the transmission buffer itself is a plain hardware  
 410 component, it is only useful within the increasingly software  
 411 defined RAN if it does not hinder the ability of the control  
 412 plane to steer Medium Access Control (MAC) layer behavior.  
 413 Although we do not evaluate such an integration in this  
 414 work, a hardware TX buffer can in principle be incorporated  
 415 into a programmable 6G stack, i.e. by exposing a set of  
 416 configuration parameters like QoS flow activation, per flow  
 417 queue limits, channel and device priority, the schedule for the  
 418 upcoming slots etc. to be set by the software-based control  
 419 plane (see Fig. 6).

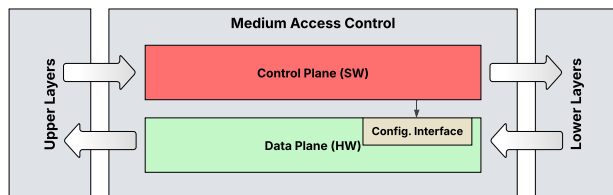

420 **FIGURE 6.** A high level MAC architecture that shows a hardware  
 421 accelerated data plane with a programming interface exposed to the  
 422 control plane.

420 These results suggest that DLL-level hardware accelera-  
 421 tion might provide a valuable complement to software-based  
 422 programmability and performance goals envisioned  
 423 for 6G.

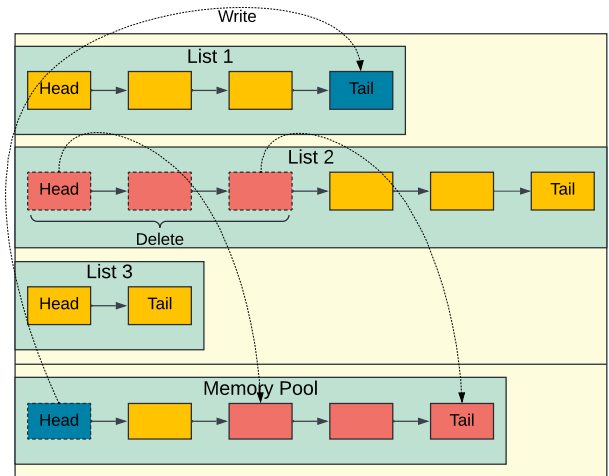

424 **FIGURE 7.** Logical structure of the TX buffer architecture, depicting an  
 425 array of lists with one list serving as memory pool. [37].

426 **E. INTRA-RAN DATA FORWARDING AT THE MAC LAYER**

427 While hardware acceleration effectively reduces processing  
 428 delays, architectural inefficiencies in the standard protocol  
 429 stack also impose avoidable latency penalties. In standard  
 430 network topology, the architecture enforces a rigid routing  
 431 path where the traffic between User Equipment (UE) attached  
 432 to the same gNodeB (gNB) is typically routed up through the  
 433 Core Network before being forwarded to the destination. This  
 434 introduces unnecessary propagation and processing delays.

435 To mitigate this, we developed a shortcut mechanism  
 436 located directly within the MAC layer of the gNB [38].  
 437 By maintaining a local mapping of UE identifiers, the  
 438 MAC layer can intercept eligible intra-RAN data packets  
 439 and forward them directly to the destination UE's downlink  
 440 queue. This effectively bypasses the upper layers of the gNB  
 441 and the Core Network entirely for eligible local traffic.

442 We implemented this logic as a proof-of-concept within the  
 443 srsRAN project, modifying the higher-layer DU processing.  
 444 Experimental results in our controlled testbed demonstrate  
 445 that this not only reduces median round-trip time, but  
 446 also stabilizes latency variance. By eliminating the variable  
 447 processing times associated with the Core Network and  
 448 backhaul transport, the shortcut mechanism provides a  
 449 consistent low-latency performance required for critical local  
 450 applications.

451 **F. AI-DRIVEN PROTOCOL SYNTHESIS FOR  
 452 PROGRAMMABLE 6G ACCESS NETWORKS**

453 Future 6G networks will demand highly adaptive RAN  
 454 protocols capable of responding to varying spectrum avail-  
 455 ability, heterogeneous traffic profiles, and dynamic multi-  
 456 access environments. Traditional protocol designs, based  
 457 on static rules and manual optimization, are insufficient  
 458 for these emerging requirements. To address this challenge,  
 we introduce a distributed, AI-driven protocol synthesis  
 framework that autonomously designs and optimizes protocol

behavior. As an example, we demonstrate its application to the MAC protocol in programmable wireless infrastructures for two major broadband technologies deployed in unlicensed bands: 5G New Radio Unlicensed and Wi-Fi [39], [40].

Our approach leverages Multi-Agent Deep Reinforcement Learning (MADRL) to enable network nodes to collaboratively learn and refine MAC behavior in a decentralized or centralized manner. Instead of adjusting individual parameters in isolation, the framework synthesizes MAC protocols from atomic functional building blocks, such as rate control policies, retransmission functions, etc. These blocks are composed dynamically, enabling the creation of new protocol behaviors tailored to real-time network conditions, including dense unlicensed coexistence (which is important for 5G NR-U) and mixed traffic with stringent latency or reliability requirements.

Unlike traditional learning systems that rely solely on centralized intelligence and may face scalability and latency bottlenecks, our design supports both centralized and fully distributed learning and execution, where each node autonomously adapts based on local observations and limited neighborhood information exchange. This aligns with the 6G vision of edge-native AI, reducing control overhead and improving robustness against topology changes and non-stationary traffic patterns.

To demonstrate the practicality of our solution, we deploy the system in ContainerNet-based emulated network environments [41], where Kademia-directed ID-based Routing Architecture (KIRA) provides autonomic connectivity and node discovery (see Section V for details). This setup enables closed-loop learning and inference in realistic multi-node scenarios, and supports distributed execution where computational and learning resources are spread across the network. It also allows end-to-end validation of our synthesized protocols on real wireless hardware under realistic latency, mobility, and network dynamics.

#### IV. FLEXIBLE & DEPENDABLE xHaul

The transition to 6G networks demands innovative solutions that ensure reliable connectivity across diverse infrastructure configurations while maintaining cost-effectiveness. Our framework establishes robust connections between 6G base stations and core network infrastructure, ensuring high availability in Backhaul networks. This implementation focuses on developing a multipath Virtual Private Network (VPN) system that optimizes traffic distribution across heterogeneous network paths, specifically integrating Ethernet and satellite communications.

The proposed multipath VPN architecture integrates three primary components that work in concert to ensure optimal traffic distribution and network reliability: path management, traffic schedule engine, and network interface abstraction as shown in Fig. 8.

Network Interface Abstraction provides a unified interface handling mechanism that enables transparent communication across different network types while maintaining optimal

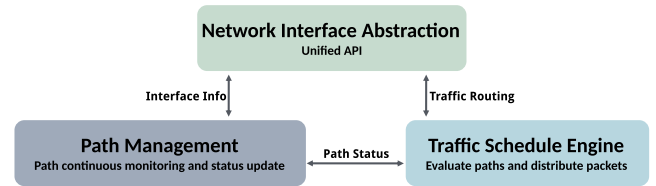


FIGURE 8. Architecture of multipath VPN for traffic backhauling.

performance characteristics. This abstraction layer manages the complexity of multiple network interfaces while presenting a consistent interface to upper-layer services, enabling efficient traffic distribution and optimal resource utilization.

At the heart of the system lies the Path Management System, which serves as the primary observational component. This subsystem continuously collects real-time performance metrics across all active paths, enabling comprehensive network visibility. Through sophisticated monitoring mechanisms explained in our article [43], it tracks latency, throughput capacity, packet loss and jitter to identify potential bottlenecks before they impact system performance.

The Traffic Schedule Engine implements sophisticated routing logic to optimize data flow across multiple paths while maintaining packet sequence integrity. This subsystem employs a multi-faceted approach to path selection, combining several complementary strategies to achieve optimal performance. The algorithm's foundation is built upon a weighted round-robin scheduling mechanism, which provides a baseline for balanced traffic distribution across available paths. This foundation is enhanced through the implementation of a multi-arm bandit algorithm that dynamically adjusts path weights based on real-time performance metrics. The bandit algorithm continuously learns from path performance data, allowing the system to adapt its traffic distribution patterns in response to changing network conditions. Preliminary performance results were published in [43].

To further optimize path selection, the system incorporates machine learning-based algorithms that analyze historical traffic patterns and network conditions. These Machine Learning (ML) components enable predictive routing decisions, anticipating potential network congestion and packet delivery issues before they occur. The ML framework processes comprehensive network metrics, including latency patterns, throughput variations, and packet loss statistics, to identify optimal routing strategies. A path-stickiness mechanism was implemented to address out-of-order packet delivery challenges [44]. This component maintains packet sequence integrity by preferentially routing related packets through the same path when possible, while still allowing for dynamic path switching when network conditions warrant it. The stickiness algorithm balances the need for consistent packet ordering with the requirement for optimal network utilization, implementing a sophisticated decision-making process that weighs these competing demands.

The integration of these multiple approaches creates a robust and adaptive traffic distribution system. The algorithm

continuously monitors network conditions and adjusts its routing decisions accordingly, ensuring optimal performance while maintaining packet sequence integrity. Through this multi-faceted approach, the system achieves both efficient traffic distribution and reliable packet delivery, even in challenging network conditions.

### V. CONTROL PLANE FABRIC

Programmable infrastructures require reliable *control plane connectivity* between devices and NFs. A typical example is the connection that an SDN controller requires to program its SDN switches. This connection often uses a separate ‘out-of-band’ Control Plane Network (CPN) so that the SDN controller can (re-)program its switches independently of the forwarding rules that are currently installed. However, this separate control plane network also requires its own setup, configuration, routing, and management. Out-of-band CPNs must be “highly available, easy to manage and maintain, and cost effective” [5], but come with the burden and complexity of installing and operating two distinct networks as well as adding new failure modalities [7]. Large, complex, and highly dynamic networks (such as 6G networks) make it nearly impractical to use separate out-of-band CPNs. An *in-band* CPN uses the same links for control as for transporting data packets and is cheaper, but comes at the cost of potential circular dependencies on connectivity [6]. Moreover, in 6G infrastructures, one can expect that separate out-of-band CPN connections are impractical and also infeasible, e.g., for wireless backhaul links and links to drones or satellites. In practice, some networks [5], [6] use a hybrid CPN approach, i.e., a mixture of in-band and out-of-band CPNs. Both CPN variants need a connectivity solution that often requires a routing protocol for larger networks (smaller networks may simply use a link-layer solution). The importance of reliable CPN connectivity is also stressed in [7] which lists control plane related outages as cause in 52% of the largest Google’s B4 WAN outages.

KIRA is a *scalable zero-touch* routing architecture that provides IPv6 connectivity without manual configuration in all types of topologies. Zero-touch does not only mean without manual configuration, but also includes adaptivity. In this context, KIRA automatically adapts to different underlay topologies and link or node failures in a self-organizing manner. It is ID-based, i.e., network resources keep their address even while changing their connectivity in the topology, e.g., by moving across the topology or becoming multi-homed. It provides self-generated addresses (currently using a 16-bit Unique Local Address prefix and a 112 bit NodeID that is randomly generated), therefore, it does not need any other address assignment mechanism for building its connectivity.

KIRA provides a *Control Plane Fabric* on top an underlying (usually link layer) topology so that control and management entities can exert control over their resources on top of this connectivity, e.g., by creating control connections and sending commands to the resources, gathering monitoring

data and so on. Thus, KIRA’s established control plane fabric allows one to interconnect all 6G networked resources for all necessary control tasks, e.g., allow for network management and control (SDN, NFV) of the 6G Core network, let 6G core components communicate with each other or with RAN components, and so on. Its properties make it a suitable solution especially for 6G networks, because it also supports non-terrestrial network resources such as satellites or drones as well as nomadic networks. Figure 9 displays the control plane fabric in relation to control plane and infrastructure layers.

In addition to zero-touch IPv6 connectivity, KIRA can provide tightly coupled add-on services that support self-organizing control planes. For example, KeLLy [45] is a scalable and efficient network topology discovery service that provides a complete network graph with low overhead even for topologies with hundreds of thousands of nodes. This can help placement and orchestration services running on controllers in the control plane. Another example is a Distributed Hash Table (DHT) that can serve as key-value store. Services and resources can register their names themselves so that other entities (e.g., users, controllers, and dependent services) can find them. This functionality supports self-organizing and zero-touch management services [46].

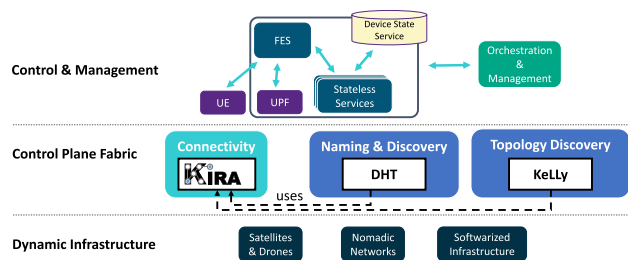


FIGURE 9. Control plane fabric: KIRA provides connectivity for the control and management services on top of dynamic infrastructure [47].

Traditional routing protocols typically require some form of configuration; e.g., administrators need to assign and set router identifiers, IP addresses, or areas to achieve scalability. Therefore, such approaches are not zero-touch as they require some form of configuration, which in turn requires a working CPN leading to a cyclic dependency. Scalable routing approaches for data centers work only in these specific topologies and require a priori knowledge of the topology, which is not suitable for rapidly changing 6G infrastructures (e.g., considering ad-hoc expansion of RAN coverage on-demand using drones). While traditional routing protocols prefer shortest path routes for efficiency, KIRA prioritizes reliable connectivity over route efficiency. KIRA’s small routing tables cause path stretch as a trade-off for scalability. However, a KIRA node actually learns shortest paths to all nodes in its routing table. Thus, if certain nodes are contacted frequently, they can be put as additional cached entries into the routing table, thereby allowing to communicate efficiently to them (e.g., especially useful for

660 controllers). KIRA’s rediscovery procedure for recovery from  
 661 failures distinguishes it from other approaches, and it can  
 662 recover reliably even from drastic failure scenarios where  
 663 15% of all links fail randomly and simultaneously in a  
 664 network with 100 000 nodes [42] or when the network  
 665 partitions.

666 Eventually, the Control Plane Fabric provided by KIRA  
 667 is a foundational enabler for resilient programmable infras-  
 668 tructures as it supplies a connectivity invariant: software  
 669 updates or configuration changes to networked resources  
 670 can always be rolled back to a previous working version,  
 671 because the connectivity to networked resources that run  
 672 KIRA is provided independently of all other services  
 673 (except connectivity at the link layer). The benefits and  
 674 usefulness of this approach have been showcased in several  
 675 demonstrations for different use cases in future 6G network  
 676 infrastructures [41], [48], [49], [50].


677 **VI. ORGANIC 6G CONTROL PLANE SERVICES**

678 Control and User Plane Separation (CUPS) is one of the key  
 679 tenets of SDN and programmability which was adopted by  
 680 the 5GS, separating RAN and user plane from the control  
 681 plane. The 5GS control plane follows a SBA, using Hypertext  
 682 Transfer Protocol 2 (HTTP/2) protocol to connect NFs while  
 683 it communicates with the RAN through a separate NG  
 684 Application Protocol (NGAP) connection handled by the  
 685 Access and Mobility Management Function (AMF) and by  
 686 Packet Forwarding Control Protocol (PFCP) with the UPF  
 687 [4]. This approach improved flexibility and the deployment in  
 688 virtualized environments. But the 6G control plane services  
 689 will have to operate in a much more diverse environment  
 690 with compute capacities available from the central office data  
 691 centers all the way to the edge and possibly UE [3]. Therefore,  
 692 it is necessary to further evolve the control plane architecture,  
 693 to accommodate the network infrastructure of the future.

694 **A. RAN-CORE CONTINUUM**

695 The 5G RAN and core networks are separated through the  
 696 N2 interface [4]. This made sense historically, as the RAN  
 697 was focused on the immediate handling of UE connectivity,  
 698 but with the split into RU, DU and CU as well as  
 699 technologies like cell-free massive Multiple Input Multiple  
 700 Output (MIMO), the RAN has become a complex distributed  
 701 system itself. Furthermore, with Software-Defined Radio  
 702 (SDR), cloud RAN and Open RAN’s RIC the RAN control  
 703 plane has more powerful capabilities. There problematically  
 704 emerges a potential for functionality overlap and conflicting  
 705 decision making by RAN and core NFs. Therefore, RAN  
 706 and core will need to converge into a continuum, crossing  
 707 protocol barriers [51]. This will allow improved handling  
 708 of UE service requests and infrastructure utilization [52].  
 709 We propose the organic RAN-Core continuum as shown  
 710 in Figure 10, as an innovative restructuring of the control  
 711 plane for 6G networks. The organic control plane continuum  
 712 is comprised of stateless services implementing procedural  
 713 control logic of the access and core networks, such as

714 authorization, authentication, session and mobility manage-  
 715 ment, to name a few. It also implements near-real-time RAN  
 716 control plane services for traffic steering and subscriber  
 717 management. There should also be environments to support  
 718 xApps like the Open RAN RICs, to enable deployment  
 719 specific extension and customization, e.g., though ML  
 720 agents. Services for positioning and sensing are examples  
 721 of additional 6G functionality enablers. These services do  
 722 not communicate horizontally between each other, because  
 723 their responsibilities are fitted to eliminate the need. This  
 724 prevents overly complex micro-service chains exchanging  
 725 requests back and forth to handle UE requests. Instead, they  
 726 rely on shared database services to store state information  
 727 about devices, subscriptions, policies and accounting. Thus,  
 728 the services can be deployed, scaled up and down, and  
 729 replaced effectively without interfering with each other. So-  
 730 called FESs (Front-End Services) act as proxies between  
 731 control plane services and the data plane. This way the control  
 732 plane can be compatible with different generations of user  
 733 planes. An administrative interface is available for non-real-  
 734 time management, such as UE provisioning, policies and  
 735 intents.

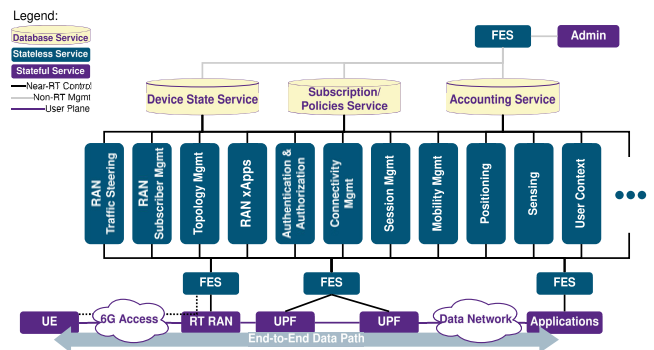

736 **FIGURE 10. Organic 6G RAN-Core continuum architecture [47]: various**  
 737 **stateless services of the RAN and core control planes communicate with**  
 738 **the data plane through Front-End Services and manage system and**  
 739 **device state stored in separate data bases.**

740 **B. THE ORGANIC CORE NETWORK**

741 By taking advantage of the control plane fabric discussed in  
 742 Section V, the control plane continuum can become more  
 743 resilient and flexible, in the face of dynamically changing,  
 744 partially unreliable infrastructure. For the sake of interoper-  
 745 ability with existing 5G radio equipment, we prioritize  
 746 the core services. We implemented the organic core control  
 747 plane by deploying Open6GCore [53] on top of KIRA [42].  
 748 Open6GCore is a 3GPP aligned core network implementation  
 749 of the organic 6G core architecture. Through its innovative  
 750 control plane design, inspired by cloud-native web-scale  
 751 solutions, it aims to be a more flexible improved core  
 752 network, deviating from the 5G SBA in certain key aspects  
 while striving for compatibility. In combination with KIRA,  
 this creates a reliable, efficient control plane which can  
 handle scale-out, service upgrades and other changes in  
 topology.

TABLE 1. Summary of evaluated VNF migration concepts.

Aspect	Approach / Scenario	Key Mechanism	Observed Behavior	Trade-offs / Insights
UPF Migration (Stateful)	CRIU-based container migration	Checkpoint/Restore In Userspace	Session interruption after PFCP mismatch	Requires NF state synchronization between SMF and UPF
Parallel UPF Operation	Dual-UPF deployment	Manual session re-attachment	Short disruption (5–10 s), successful reconnection	Effective for controlled switchover; not fully autonomous
SMF Migration (Control Plane)	CRIU checkpoint transfer	NF re-registration via NRF	No session loss, seamless continuity	Migration feasible for control-plane NFs; low impact
SMF-Triggered UPF Switching	PFCP session modification	Dynamic rerouting to alternate UPF	Continuous traffic; zero packet loss	Automation reduces downtime, enhances resiliency
VM-Level Migration Tests	Coordinated live migration	NIC state preservation	Latency spikes < 20 ms, no packet timeouts	Coordination essential for minimal user disruption

VII. NETWORK FUNCTION VIRTUALIZATION

As stated earlier, NFV is already state-of-the-art. But research into aspects like VNF migration and placement optimization can still provide benefits to future mobile networks.

A. VNF MIGRATION

Dynamic migration of VNFs is a key capability for fault-tolerant and programmable 6G infrastructures. In recent experimental evaluations within a containerized environment, open and reproducible migration techniques using open-source components such as Open5GS have been investigated [54]. The testbed was deployed across virtualized edge-cloud infrastructures and explored the migration of both UPFs and Session Management Functions (SMFs).

To enable live migration, we applied Checkpoint/Restore In Userspace (CRIU) to preserve the runtime state of containerized NFs during relocation. While classical CRIU-based restoration successfully maintained container state, it did not preserve PFCP sessions, leading to temporary user-plane disruption. To mitigate this limitation, we implemented an SMF-triggered rerouting mechanism, in which the SMF autonomously modifies PFCP session parameters to redirect traffic to an alternative UPF instance without user intervention. The results demonstrated seamless session continuity and negligible latency variation (below 10 second reconnection for manual switchover versus zero packet loss for automated rerouting).

Migration of control-plane NFs such as the SMF proved largely non-disruptive, as the Network Repository Function (NRF) automatically re-registered migrated instances after restoration. Complementary measurements during Virtual Machine (VM) live migration showed that coordinated Network Interface Controller (NIC) state preservation significantly reduces latency spikes (typically < 20 ms). These findings highlight the trade-offs between transparency, orchestration complexity, and session continuity, providing a practical blueprint for resilient NF migration in open, modular 5G/6G testbeds. A high level summary for each approach is listed in Table 1.

B. PLACEMENT OPTIMIZATION

6G’s software-only, cloud-native, heterogeneous infrastructure across central, regional, edge, nomadic, and

non-terrestrial nodes makes VNF placement a primary lever for response time, resource utilization, scalability, and robustness. “Optimal” is context-dependent and can shift with diurnal demand patterns, so Multi-Criteria Optimization is needed to navigate cost–latency–success trade-offs under capacity and reliability constraints.

To address these competing goals rigorously, [55] employs Mixed-Integer Programming combined with Multi-Criteria Optimization. It streamlines the core into three services—FRONTEND, WORKER, DATABASE—modeled as an ordered chain to keep service placement tractable while preserving realistic request flows. Two complementary MIP formulations are proposed: a request-oriented model for heterogeneous demands and an aggregated model that groups homogeneous requests by ingress and scales independently of request volume. The models jointly minimize installation costs and end-to-end latency while targeting a 100% success rate. They accommodate node capacities, link bandwidth, per-service subscriber limits, and failure scenarios. Trade-offs are explored with the epsilon-constraint method and re-optimization, producing Pareto-optimal operating points rather than a single “best” answer. Numerical experiments on heterogeneous synthetic central–regional–edge ring topologies with hotspots show that tightening latency guarantees shifts installations toward the edge and hotspots, which increases costs. When capacity constraints are active, solutions form service centers and split services across neighboring nodes where needed. The aggregated model scales to very large request volumes, while the request-oriented model provides flexibility for heterogeneous traffic at higher computational cost. Based on the MIP/MCO outputs, the network provider can select an optimal solution depending on the preferences.

A promising extension is to introduce a flexibility metric for placements to favor solutions that remain effective across different scenarios and times of day. These steps pave the way for dynamic re-placement in future core networks that continuously react to the time-varying nature of demand.

VIII. ADAPTIVE NETWORK DEPLOYMENT

A. NOMADIC NETWORKS

Within the scope of organic 6G networks it will be possible to realize new architectural concepts and types of 6G

networks [3], [56]. In this domain the so called Nomadic Networks (NNs) represent a significant shift in how network infrastructure is designed and operated. Unlike traditional cellular communication systems like 5G, the concept for NNs for 6G consists of mobile and self-organizing Non-Public Networkss (NPNs) that provide radio infrastructure capabilities while moving [57]. This paradigm shift introduces new architectural challenges and opportunities, particularly in dynamic environments such as large outdoor events, emergency situations, or cross-border activities.

NNs introduce specific Key Performance Indicators (KPIs) that are crucial for evaluating their performance and effectiveness. These include connectivity assumptions, function placement, and mobility support. For NNs, additional KPIs focus on the unique requirements of industrial and tactical applications, which differ significantly from traditional static cellular networks [58]. These newly identified KPIs can be summed up in application clusters that share the same demands on specific KPIs, as illustrated in Figure 11. These include industry, manufacturing, agriculture, and public services. Each sector has specific requirements that can be met through the deployment of NNs, enhancing connectivity and operational efficiency in mobile environments.



FIGURE 11. NN application clusters: Unpredictable, unscheduled and safety-relevant, Scheduled, single operator and Predictable cross-border NNs.

The integration of nomadic networking into 6G will require adaptations in standardization and regulation [59]. This includes addressing functional splits within the RANs, especially on the N2 and N3 interface and the development of a robust backhauling solution via the N6 interface to ensure continuous connection to, e.g., a central cloud server. Additionally, ensuring interoperability with existing systems and maintaining stakeholder trust is critical for the successful deployment of these networks [60].

NNs represent a transformative approach to 6G infrastructure, offering enhanced connectivity and flexibility in dynamic environments. By addressing architectural

challenges and defining specific KPIs, NNs can meet the evolving needs of various sectors. Proposed changes to current standards have to be considered to realize this new cellular communication concept for a more adaptable and efficient wireless communication systems.

B. NETWORKS-IN-NETWORK

Besides the NNs approach, organic 6G networking is also an essential part to realize concepts in the field of Networks-in-Network (NiN), representing an approach in the design and operation for sub-networks within the coverage area of an overall communication system, particularly for 5G or future 6G networks [61], [62]. NiN allows for the dynamic adaption and management of available sub-networks or the zero-touch integration of new ones within an overlayer network infrastructure. Different sub-networks can have specific settings to fulfill different QoSs requirements. This approach is supporting diverse applications with varying requirements, especially demands in the scope of ultra-reliable, low latency communication (uRLLC).

Our developed Dynamic Spectrum Management (DSM) presents the fundamentals of this approach in combination with the routing protocol KIRA. DSM involves the real-time allocation and management of available spectrum resources of the sub-networks to optimize sub-network performance and meet the different QoS needs of different sub-networks [63]. By leveraging advanced algorithms and machine learning techniques, DSM could furthermore adaptively allocate spectrum based on demand, interference levels, and service priorities. This will ensure that each sub-network receives the necessary bandwidth and configuration to fulfill QoS requirements, thereby enhancing overall spectral efficiency and user experience. Zero-touch realization is an important aspect within the realization of NiN, focusing on automated detection and integration of new or unknown sub-networks. This will lead to reduced human intervention and improved operational efficiency. Via KIRA an automated configuration, monitoring, and optimization of network functions and services can be realized [49].

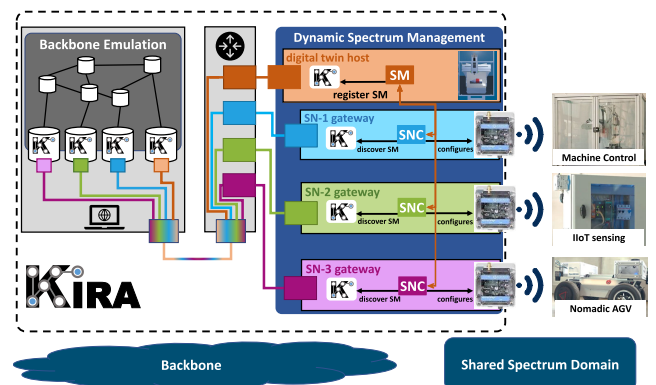


FIGURE 12. Architecture for DSM in an Industrial Internet of Things (IIoT) domain [50].

The NiN approach offers a robust framework for 6G wireless communication systems, addressing the challenges

of diverse application requirements and dynamic environments. Enabled by DSM and KIRA, NiN streamline spectrum allocation, enhanced network performance, and reduced operational costs, e.g., for IIoTs scenarios as shown in Figure 12. In addition to this, an integration of the in Section VIII-A described approach of NNs is possible. Combining both concepts will lead to an holistic approach for cellular based wireless communication, especially in the domain of NPNs.

## IX. RECONFIGURABILITY

Reconfigurability is the ability of a system to adapt to a changing environment. For example, during a concert, hotspots may require temporary adjustments of the environment, such as scaling the network infrastructure to meet service-level agreements (SLAs).

Reconfiguration can be *physical*, *logical* or a combination of the two. Physical reconfiguration changes the network infrastructure, for example, using drones to deploy aerial small cell base stations, while logical reconfiguration often involves changes at the network and functional level, such as changes in topology or migration and scaling of virtualized functions. Both physical and logical reconfigurations are required to meet the strict SLAs of 6G systems.

Such SLAs often aim for high throughput or ultra-low and guaranteed latencies. Achieving this, however, is a major challenge in practice. One such challenge is the switching time across configurations, causing high variability of latency or loss of throughput, leading to SLA violations. We present two examples to illustrate how to tackle such challenges both physically and logically.

### A. LOGICALLY

Logical reconfigurations are particularly useful for applications with strict latency requirements and changing load. One example of such applications are ML services with ultra-low latency requirements. These services are often accelerated by GPUs, for example at a nearby base station, to comply with their strict latency requirements. A single ML service, however, often underutilizes a GPU's processing capacity and furthermore, having one GPU exclusively assigned to each ML service is often infeasible. As a result, multiple services typically share a GPU, thereby improving cost-efficiency.

GPU sharing, however, requires *logical reconfigurability* to dynamically and fine granularly assign resources, such as individual processors of the shared GPU, to services. Moreover, a request to a service with ultra-low latency requirements needs *immediate* access to processors to comply with the SLA, while any unused processors by this service must remain accessible to other services for cost-efficient operation. Hence, a logical reconfiguration mechanism for GPUs used in 6G systems must be fast and provide isolation: fast to adapt to changing loads of services on the fly, while isolation guarantees compliance with latency SLAs.

Reference [64] illustrated such a mechanism specifically for NVIDIA GPUs and proposed to spatially partition the

processors of a GPU. The system dynamically assigns these partitions with low overhead at runtime and in between *kernel* launches to different services.<sup>4</sup>

### B. PHYSICALLY

Physical reconfiguration alters the structure of the network itself to maintain service continuity and meet strict performance requirements. Such reconfiguration is particularly relevant in highly dynamic or spatially distributed environments where the physical medium, whether radio, optical, or aerial, becomes part of the adaptive control loop.

One important class of physical reconfiguration involves adaptive link steering and resource relocation. In aerial and optical access networks, for example, directional links such as free-space optical (FSO) beams must be continuously reoriented to maintain connectivity under changing environmental conditions. The network therefore operates as a physically reconfigurable topology, where each reorientation introduces a short disruption period that must be considered in scheduling and resource allocation. Coordinating such reconfigurations requires a balance between responsiveness and stability. Frequent steering ensures high link quality, yet excessive switching can degrade throughput. Therefore, dynamically allocating serving nodes or beams based on link conditions and expected switching delays can sustain throughput and latency guarantees even in stochastic environments.

The physical network reconfiguration ability with adaptive link steering and resource relocation is very important for the use of integrated sensing and communication (ICAS)-enabled predictive link blockage mitigation techniques. Especially wireless communication links in the millimeter-wave (mmWave) frequency region suffer from blockages of the direct line-of-sight path. Through the ICAS functionality of transceivers, moving objects can be detected and tracked. If a potential blockage is predicted, preventive countermeasures can be executed [65]. This includes the use of an alternative mmWave transmission path through a reflection, but also network reconfiguration through the use of other physical resources (e.g. another base station) or communication links in different frequency bands. Since mmWave links usually provide higher capacity compared to lower frequency bands, the selection of the blockage mitigation measure must include the overall network configuration and current performance and usage parameters.

Another form of physical reconfiguration arises at the optical transport layer, where the logical interconnection of network nodes can be redefined through reconfigurable optical circuits. Here, instead of changing the position of nodes or beams, the physical lightpaths themselves are rearranged to align with current traffic demands and service function placements. By jointly adapting lightpath topologies with the placement and scaling of virtualized network

<sup>4</sup>A kernel is a function that executes on the GPU and typically runs between tens to hundreds of  $\mu s$ .

functions, the network can minimize end-to-end delay and reduce queuing congestion without overprovisioning. Such integration of compute and transport reconfiguration, as explored for wavelength-division-multiplexed (WDM) optical networks [66], represents a scalable solution toward delay-optimized backbone infrastructures.

**X. TOWARDS FLEXIBLE, ORGANIC 6G NETWORKS**

Modern wireless mobile networks are built on top of a partially programmable network infrastructure. SDN, cloud RAN, CUPS, NFV and MANO have already or are being adopted in existing networks. These technologies, however, do not suffice to address the use cases of future wireless mobile networks beyond 5G [9]. Advanced Programmable Access Networks are needed to meet new flexibility, latency and throughput demands. Integrating NTN and other technologies with non-static link characteristics require backhaul adaptation. The control plane needs to not only be more reliable and efficient, but also more resilient so that it can adapt to foreseen changes and unforeseen failure scenarios in a meaningful manner. When the network is segmented, the individual segments should be able to operate on their own. Ideally, full connectivity loss between most larger segments should not be possible, but a truly resilient network design needs to take this possibility into account. Nomadic and reconfigurable networks in networks with diverse front- and back-hauls need to be integrated and exploited appropriately.



**FIGURE 13. High-level architecture: The user, control and management planes run on the network infrastructure, connected in a control plane network for management and control communication.**

We propose an end-to-end system, whose high-level architecture is illustrated in Figure 13. The system consists of management, control, user data, and infrastructure planes. A control plane network is established on top of the infrastructure, to connect the management, control and user data planes. This is essential because the three planes are interwoven, geographically distributed systems whose operation relies on a heterogeneous and dynamic system of networked components (the infrastructure). Services in the management plane provide life-cycle management and configuration of the other planes, operating at non-real-time level and slower. Control plane services handle core network procedures, steering the data flows and control the user data plane components. In the user data plane, access, front-, mid- and back-haul network components implement the actual data transmission.

Where in this architecture do the different technologies we presented belong? To understand this and the relations between the components in more detail, consider the


end-to-end architecture in Figure 14. It shows which components are present in which plane and indicates the programming interfaces.

In the management plane, NFV MANO services work together with RAN-Core administration service and Service Management and Orchestration (SMO)/non-real-time RIC. The Operations Support System (OSS) and Business Support System (BSS) use the NFV Orchestrator (NFVO) to manage the lifecycle of NSs. The NFVO orchestrates the NSs through VIMs and VNF Managers. The RAN-Core Administration service is added to the management plane, providing operators the ability to manage RAN-Core specific parameters. SMO and non-real-time RIC from open RAN are also part of the management plane. This RIC can host rApps for advanced analytics and management steering. The VIM provisions virtual network, compute and storage resources for the virtualized control and user plane components, relying on virtualization technologies, such as Infrastructure as a Service (IaaS) and SDN frameworks.

The converged RAN-Core control plane will replace the 5G control plane and the Open RAN near-real-time RIC. Spectrum usage of co-located networks will be coordinated by the DSM. The DSM could be managed by the Service Management and Orchestration (SMO)/RIC and its rApps. SDN controllers are needed to steer traffic flows in the user plane. As the network services will require virtual compute and storage resources, we include an Infrastructure as a Service (IaaS) control plane to represent the services handling these.

In the user data plane, the 6G UPF connects the access to the data networks. It is controlled by the session and mobility services in the 6G control plane. When it comes to the RAN the programmable access technologies FutureSDR, IPEC, HELIX, scalable transmission buffers as well as the AI-based protocol synthesis offer the flexibility needed to support the challenges envisioned, without sacrificing performance. With the ability to incorporate accelerators and optimize MAC for latency or throughput, more use-case tailored RAN slicing is possible. To enable dependable and flexible back- and front-haul connectivity, multipath support with link-KPI awareness taking advantage of the characteristics of alternatives are needed.

In the infrastructure plane, we find a diverse set of technologies, whose characteristics differ from traditional networks. The networks will still use the existing infrastructure as 5G, or upgraded versions with better throughput and latency, but in addition, nomadic and reconfigurable networks will be integrated. Combining terrestrial and non-terrestrial networks, introduces new levels of dynamicity into the system [67]. With Low Earth Orbit (LEO) satellites, for example, introducing periodically changing links that affect traffic paths, and UAVs providing mobile and nomadic network nodes that can offer temporary connectivity. The interactions with nomadic networks need to be understood, so they can be operated in conjunction with the existing networks. The same is true for Networks in Networks. Here, the coexistence

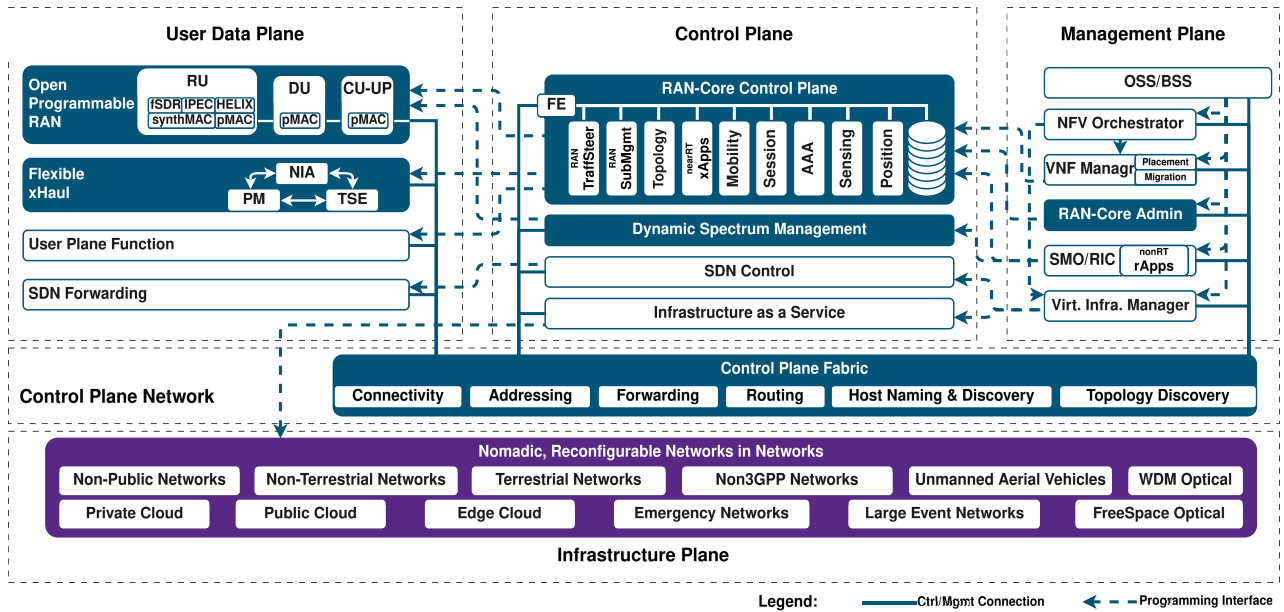

**FIGURE 14.** End-2-End 6G programmable network architecture: Programmable RANs, flexible xHauls and a control plane continuum communicating via the robust control plane fabric are needed to operate in increasingly diverse, nomadic and reconfigurable networks in networks infrastructure.

and interactions of different networks can cause disruptions that warrant the investigation of mechanisms such as the DSM that serves to coordinate spectrum usage. Furthermore, through reconfiguration the network topology itself can be adapted. When usage patterns change or parts of the network are disrupted, the network needs to maintain QoS or at least basic services as much as possible.

The network connecting management, control and user plane will be provided by a control plane fabric. To ensure dependable operation, the control plane fabric needs to be capable of efficiently connecting the different components. While Figure 14 organizes services and components logically, the actual topology and geographic distribution will be a lot more interwoven. User plane components, of course, are physically restricted to their hardware. Control plane services however, can be deployed across the network in different locations at different times, depending on the resources and user demand. In fact, near-real-time xApps will require close proximity to the respective access networks, to meet latency requirements. Traffic steering and topology management of access networks may also be more efficient, if they only cover certain segments of the network, with instances in different manageable parts of the network. As load varies, the same may be true for other services, such as mobility management or Authentication, Authorization and Accounting (AAA). Furthermore, multiple instances of management plane services could manage different regions of a network in federation. While connectivity between regions needs to be dependable, the regions also need to be operable on their own. The need to handle the changing topologies of nomadic, reconfigurable and non-terrestrial networks as well as increased need for dependability provide yet another challenge to the control plane network. Only with

a zero-touch control plane fabric supplied by KIRA and the converged organic RAN-Core can the 6G control plane function efficiently in the geographically distributed in-network cloud continuum in a dependable manner. Because the organic, converged RAN-Core control plane follows a cleaner service pattern, it can be scaled better across the network and KIRA can ensure control plane connectivity even during disruptions and reconfigurations without human intervention.

### XI. CONCLUSION

Programmability of network infrastructures plays a pivotal role in the current and future global communications networks. This is especially true in the context of 6G networks that are going to be very dynamic (e.g., due to NTN, nomadic networks and Networks-in-Network) and require higher flexibility. The Open6GHub consortium has been at the forefront of research in this domain. In this article, we presented the latest research results towards programmable infrastructures for 6G from the project, demonstrating

- Advancements for programmable RANs by providing several building blocks such as FutureSDR, IPEC and HELIX to support hardware-based solutions.
- A scalable hardware transmission buffer design to cope with high data rates of 6G while achieving low latencies.
- An AI-driven protocol synthesis framework to optimize protocol behavior such as medium access.
- New automated and ML-based solutions to optimize traffic back-hauling.
- Organic 6G control plane services based on KIRA as scalable and resilient Control Plane Fabric as well as an organic core control plane on top.
- The proposed architecture also enables an Organic 6G RAN-Core Continuum.

- The effects of live migration when core functions were realized as VNFs.
- Insights into organic network VNF placement optimization.
- A deeper understanding of the interactions between fixed and nomadic networks, as well as between networks in networks.
- Logical and physical reconfiguration techniques that allow the network to change on-demand.

This work paves the way for the development of programmable infrastructures for 6G and beyond. To this end, we have provided an end-to-end architecture explaining the relationships between these and existing technologies. The architecture helps understand the complexity of future networks. The flexibility of the programmable 6G infrastructure has great potential, but effective MANO of the various elements will require a clean architecture with well-defined interfaces. What we have provided is a first step toward this architecture that brings together the different layers.

Although we have demonstrated these technologies in various scenarios, a complete end-to-end demonstrator is yet to be created. This would be important to prove the overall architecture but will require additional integration with third party components. Enabling programmability at this granularity increases the attack surface for malicious actors. The security and safety consequences need to be considered when moving towards real product implementations. Our perspective in this article focuses on 6G, i.e., 3GPP technologies, but integration with other network technologies needs to be understood as well and requires further work.

## ACKNOWLEDGMENT

The authors would like to thank their partners and colleagues who contributed to the Open6GHub Project for the enlightening discussions, critical feedback, and collaboration.

## REFERENCES

- [1] L. Bonati, M. Polese, S. D'Oro, S. Basagni, and T. Melodia, "Open, programmable, and virtualized 5G networks: State-of-the-art and the road ahead," *Comput. Netw.*, vol. 182, Dec. 2020, Art. no. 107516. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1389128620311786>
- [2] W. Jiang, B. Han, M. A. Habibi, and H. D. Schotten, "The road towards 6G: A comprehensive survey," *IEEE Open J. Commun. Soc.*, vol. 2, pp. 334–366, 2021.
- [3] M.-I. Corici, F. Eichhorn, R. Bless, M. Gundall, D. Lindenschmitt, B. Bloessl, M. Petrova, L. Wimmer, R. Kreuch, T. Magedanz, and H. D. Schotten, "Organic 6G networks: Vision, requirements, and research approaches," *IEEE Access*, vol. 11, pp. 70698–70715, 2023.
- [4] The 3rd Generation Partnership Project, "3GPP TS 23.501: System architecture for the 5G system (5GS)," 3rd Generation Partnership Project (3GPP), Sophia Antipolis, France, Tech. Rep. TS 23.502, V18.9.0, Apr. 2025. [Online]. Available: <https://www.3gpp.org/dynareport/23502.htm>
- [5] A. D. Ferguson, Steve Gribble, C.-Y. Hong, C. Killian, W. Mohsin, H. Muehe, J. Ong, L. Poutievski, A. Singh, L. Vicisano, R. Alimi, S. S. Chen, M. Conley, S. Mandal, K. Nagaraj, K. N. Bollineni, A. Sabaa, S. Zhang, M. Zhu, and A. Vahdat, "Orion: Google's software-defined networking control plane," in *Proc. 18th USENIX Symp. Networked Syst. Design Implement. (NSDI)*, Apr. 2021, pp. 83–98. [Online]. Available: <https://research.google/pubs/orion-googles-software-defined-networking-control-plane/>

- [6] M. Denis, Y. Yao, A. Hatch, Q. Zhang, C. L. Lim, S. Zhang, K. Sugrue, H. Kwok, M. Jimenez Fernandez, P. Lapukhov, S. Hebbani, G. Nagarajan, O. Baldonado, L. Gao, and Y. Zhang, "EBB: Reliable and evolvable express backbone network in meta," in *Proc. ACM SIGCOMM Conf. New York, NY, USA: Association for Computing Machinery*, 2023, pp. 346–359, doi: [10.1145/3603269.3604860](https://doi.org/10.1145/3603269.3604860). [Online]. Available: <https://dl.acm.org/doi/10.1145/3603269.3604860>
- [7] A. Krentsel, N. Saran, B. Koley, S. Mandal, A. Narayanan, S. Ratnasamy, A. Al-Shabibi, A. Shaikh, R. Shakir, A. Singla, and H. Weatherspoon, "A decentralized SDN architecture for the WAN," in *Proc. ACM SIGCOMM Conf. New York, NY, USA: Association for Computing Machinery*, Aug. 2024, pp. 938–953, doi: [10.1145/3651890.3672257](https://doi.org/10.1145/3651890.3672257).
- [8] M. Giordani, M. Polese, M. Mezzavilla, S. Rangan, and M. Zorzi, "Toward 6G networks: Use cases and technologies," *IEEE Commun. Mag.*, vol. 58, no. 3, pp. 55–61, Mar. 2020.
- [9] N. Franchi et al., *German Perspective on 6G—Use Cases, Technical Building Blocks and Requirements. Insights by the 6G Platform German*. Kaiserslautern, Germany: FAU Univ. Press, 2024, doi: [10.25593/978-3-96147-797-5](https://doi.org/10.25593/978-3-96147-797-5). [Online]. Available: <https://open.fau.de/items/b5704b96-9a81-4a27-8316-8759d1c5d18e>
- [10] A. Campbell, H. D. Meer, M. Kounavis, K. Miki, J. Vicente, and D. Villela, "A survey of programmable networks," *Comput. Commun. Rev.*, vol. 29, pp. 7–23, Apr. 1999.
- [11] E. Kaljic, A. Maric, P. Njemcevic, and M. Hadzialic, "A survey on data plane flexibility and programmability in software-defined networking," *IEEE Access*, vol. 7, pp. 47804–47840, 2019.
- [12] N. Feamster, J. Rexford, and E. Zegura, "The road to SDN: An intellectual history of programmable networks," *ACM SIGCOMM Comput. Commun. Rev.*, vol. 44, no. 2, pp. 87–98, Apr. 2014, doi: [10.1145/2602204.2602219](https://doi.org/10.1145/2602204.2602219).
- [13] E. Haleplidis, K. Pentikousis, S. Denazis, J. H. Salim, D. Meyer, and O. Koufopavlou, *Software-defined Networking (SDN): Layers and Architecture Terminology*, document 7426, Fremont, CA, USA, Jan. 2015. [Online]. Available: <https://www.rfc-editor.org/rfc/rfc7426.txt>
- [14] *Openflow Switch Specification, Version 1.5.1, on F TS-025*, Open Networking Foundation (ONF), Palo Alto, CA, USA, Mar. 2015.
- [15] C. Filsfils, P. Camarillo, J. Leddy, D. Voyer, S. Matsushima, and Z. Li, *Segment Routing Over IPv6 (SRv6) Network Programming*, document 8986, Fremont, CA, USA, Feb. 2021. [Online]. Available: <https://www.rfc-editor.org/rfc/rfc8986.txt>
- [16] S. Matsushima, C. Filsfils, M. Kohno, P. Camarillo, and D. Voyer, *Segment Routing Over IPv6 for the Mobile User Plane*, document RFC 9433, Fremont, CA, USA, Jul. 2023. [Online]. Available: <https://www.rfc-editor.org/rfc/rfc9433.txt>
- [17] P. Bosshart, D. Daly, G. Gibb, M. Izzard, N. McKeown, J. Rexford, C. Schlesinger, D. Talayco, A. Vahdat, G. Varghese, and D. Walker, "P4: Programming protocol-independent packet processors," *ACM SIGCOMM Comput. Commun. Rev.*, vol. 44, no. 3, pp. 87–95, Jul. 2014, doi: [10.1145/2656877.2656890](https://doi.org/10.1145/2656877.2656890).
- [18] D. Soldani, P. Nahii, H. Bour, S. Jafarizadeh, M. F. Soliman, L. Di Giovanna, F. Monaco, G. Ognibene, and F. Rizzo, "EBPF: A new approach to cloud-native observability, networking and security for current (5G) and future mobile networks (6G and beyond)," *IEEE Access*, vol. 11, pp. 57174–57202, 2023.
- [19] E. F. Kfoury, J. Crichigno, and E. Bou-Harb, "An exhaustive survey on P4 programmable data plane switches: Taxonomy, applications, challenges, and future trends," *IEEE Access*, vol. 9, pp. 87094–87155, 2021.
- [20] E. Kohler, R. Morris, B. Chen, J. Jannotti, and M. F. Kaashoek, "The click modular router," *ACM Trans. Comput. Syst.*, vol. 18, no. 3, pp. 263–297, Aug. 2000, doi: [10.1145/354871.354874](https://doi.org/10.1145/354871.354874).
- [21] J. Gil Herrera and J. F. Botero, "Resource allocation in NFV: A comprehensive survey," *IEEE Trans. Netw. Service Manage.*, vol. 13, no. 3, pp. 518–532, Sep. 2016.
- [22] S. Kianpisheh and T. Taleb, "A survey on in-network computing: Programmable data plane and technology specific applications," *IEEE Commun. Surveys Tuts.*, vol. 25, no. 1, pp. 701–761, 1st Quart., 2023.
- [23] (Oct. 2025). *Open Source MANO (OSM)*. [Online]. Available: <https://osm.etsi.org>
- [24] (Jan. 2025). *Open Network Automation Platform (ONAP)*. [Online]. Available: <https://onap.org>
- [25] B. Chatras, "On the standardization of NFV management and orchestration APIs," *IEEE Commun. Standards Mag.*, vol. 2, no. 4, pp. 66–71, Dec. 2018.

- [26] X. Haitao, W. Hao, K. Katsalis, Y. Kuno, D. Lee, J. Leung, J. Manchang, F. Naim, J. Pieczzerak, S. Schaller, T. Takahashi, I. Vancsa, and L. Willis. (May 2025). *Management and Orchestration of the Telco Cloud: The Role of NFV-MANO and Its Added Value*. [Online]. Available: <https://www.etsi.org/images/files/ETSIWhitePapers/ETSI-WP-67-The-Role-of-NFV-MANO-and-Its-Added-Value.pdf>
- [27] M. Corici, E. Troudt, P. Chakraborty, and T. Magedanz, "An ultra-flexible software architecture concept for 6G core networks," in *Proc. IEEE 4th 5G World Forum (5GWF)*, Oct. 2021, pp. 400–405.
- [28] A. Checko, H. L. Christiansen, Y. Yan, L. Scolari, G. Kardaras, M. S. Berger, and L. Dittmann, "Cloud RAN for mobile networks—A technology overview," *IEEE Commun. Surveys Tuts.*, vol. 17, no. 1, pp. 405–426, 1st Quart., 2015.
- [29] R. Agrawal, A. Bedekar, T. Kolding, and V. Ram, "Cloud RAN challenges and solutions," *Ann. Telecommun.*, vol. 72, nos. 7–8, pp. 387–400, Aug. 2017, doi: [10.1007/s12243-017-0584-5](https://doi.org/10.1007/s12243-017-0584-5).
- [30] M. Polese, L. Bonati, S. D'Oro, S. Basagni, and T. Melodia, "Understanding O-RAN: Architecture, interfaces, algorithms, security, and research challenges," 2022, *arXiv:2202.01032*.
- [31] M. Nance Hall, K.-T. Foerster, S. Schmid, and R. Durairajan, "A survey of reconfigurable optical networks," *Opt. Switching Netw.*, vol. 41, Sep. 2021, Art. no. 100621. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1573427721000187>
- [32] O. Sami Oubbati, M. Atiquzzaman, T. Ahamed Abanger, and A. Ibrahim, "Softwarization of UAV networks: A survey of applications and future trends," *IEEE Access*, vol. 8, pp. 98073–98125, 2020.
- [33] D. Volz, C. Spang, and A. Koch, "IPEC: Open-source design automation for inter-processing element communication," in *Applied Reconfigurable Computing, Architectures, Tools, and Applications*. Berlin, Germany: Springer, 2022.
- [34] C. Heinz, J. Hofmann, J. Korinthe, L. Sommer, L. Weber, and A. Koch, "The TaPaSCo open-source toolflow," *J. Signal Process. Syst.*, vol. 93, no. 5, pp. 545–563, May 2021, doi: [10.1007/s11265-021-01640-8](https://doi.org/10.1007/s11265-021-01640-8).
- [35] D. Volz, A. Koch, and B. Bloessl, "Software-defined wireless communication systems for heterogeneous architectures," in *Proc. 29th Annu. Int. Conf. Mobile Comput. Netw.*, Madrid, Spain, Oct. 2023, pp. 1–3.
- [36] R. Ruiz, J. O. Lacruz, B. Bloessl, M. Hollick, and J. Widmer, "HELIX: High-speed real-time experimentation platform for 6G wireless networks," in *Proc. 23rd Annu. Int. Conf. Mobile Syst., Appl. Services*, Anaheim, CA, USA, Jun. 2025, pp. 305–318.
- [37] H. Borchert, K. Krishne Gowda, and M. Krstic, "Ultra-low-latency data link layer TX buffer architecture for wireless communications," in *Proc. IEEE Comput. Soc. Annu. Symp. VLSI (ISVLSI)*, vol. 1, Jul. 2025, pp. 1–6.
- [38] J. John, M. Corici, and T. Magedanz, "MAC layer shortcuts for low-latency intra-RAN UE communication," in *Proc. 4th Int. Conf. 6G Netw. (6GNet)*, Dec. 2025, pp. 1–9.
- [39] N. Keshtiarast and M. Petrova, "ML framework for wireless MAC protocol design," in *Proc. IEEE Int. Conf. Mach. Learn. Commun. Netw. (ICMLCN)*, May 2024, pp. 560–565.
- [40] N. Keshtiarast, O. Renaldi, and M. Petrova, "Wireless MAC protocol synthesis and optimization with multi-agent distributed reinforcement learning," *IEEE Netw. Lett.*, vol. 6, no. 4, pp. 242–246, Dec. 2024.
- [41] L. Paeleke, N. Keshtiarast, P. Seehofer, R. Bless, H. Karl, M. Petrova, and M. Zitterbart, "Demo: Testing AI-driven mac learning in autonomic networks," in *Proc. IEEE 32nd Int. Conf. Netw. Protocols (ICNP)*, Oct. 2024, pp. 1–2.
- [42] R. Bless, M. Zitterbart, Z. Despotovic, and A. Hecker, "KIRA: Distributed scalable ID-based routing with fast forwarding," in *Proc. IFIP Netw. Conf. (IFIP Networking)*, Jun. 2022, pp. 1–9, doi: [10.23919/IFIPNetworking55013.2022.9829816](https://doi.org/10.23919/IFIPNetworking55013.2022.9829816).
- [43] A. Yonchev, E.-R. Modroui, M. Corici, T. Magedanz, and C. Cavdar, "Towards reliable and cost-effective backhauling for private 5G networks: A multipath terrestrial-satellite transport network leveraging multi-armed bandit algorithms," in *Advanced Information Networking and Applications*. Cham, Switzerland: Springer, Apr. 2025, pp. 268–280. [Online]. Available: [https://link.springer.com/chapter/10.1007/978-3-031-87763-6\\_24](https://link.springer.com/chapter/10.1007/978-3-031-87763-6_24)
- [44] J. Dommes, E.-R. Modroui, B. Riemer, M. Corici, and T. Magedanz, "Session-persistent traffic scheduler for multipath backhaul optimizations in 5G networks and beyond: An experimental evaluation," in *Proc. 17th, Ed., IEEE AFRICON*, Dec. 2025. [Online]. Available: <https://2025.ieee-africon.org/accepted-papers/>
- [45] P. Seehofer, R. Bless, and M. Zitterbart, "KeLLy—Efficient, scalable link layer topology discovery," in *Proc. NOMS - IEEE/IFIP Netw. Operations Manage. Symp.*, May 2023, pp. 1–5.
- [46] E. Coronado, R. Behraves, T. Subramanya, A. Fernandez-Fernandez, M. S. Siddiqui, X. Costa-Perez, and R. Riggio, "Zero touch management: A survey of network automation solutions for 5G and 6G networks," *IEEE Commun. Surveys Tuts.*, vol. 24, no. 4, pp. 2535–2578, 2022.
- [47] M. Corici, E. Fabian, R. Bless, D. Krummacker, T. Meuser, L. Paeleke, P. Seehofer, H. Karl, B. Scheuermann, R. Steinmetz, M. Zitterbart, T. Magedanz, and H. D. Schotten, "Organic 6G software-based networks," 2024. [Online]. Available: <https://web.archive.org/web/20240914050259/https://www.open6ghub.de/app/uploads/2024/07/Organic-6G-Software-Based-Networks-Adaptability-Flexibility-Simplicity-Reliability-and-Openness-at-the-System-Level.pdf>
- [48] P. Seehofer, H. Mahrt, R. Bless, and M. Zitterbart, "Demo: Enabling autonomic network infrastructures with KIRA," in *Proc. ACM SIGCOMM Conf. New York, NY, USA: Association for Computing Machinery*, Sep. 2023, pp. 1165–1167, doi: [10.1145/3603269.3610864](https://doi.org/10.1145/3603269.3610864).
- [49] D. Lindenschmitt, P. Seehofer, M. Schmitz, J. Mertes, R. Bless, M. Klar, M. Zitterbart, J. C. Aurich, and H. D. Schotten, "Dynamic spectrum management for 6G network-in-network concepts," in *Proc. 15th Int. Conf. Netw. Future (NoF)*, Oct. 2024, pp. 151–153.
- [50] D. Lindenschmitt, P. Seehofer, M. Schmitz, J. Mertes, R. Bless, M. Zitterbart, J. C. Aurich, and H. D. Schotten, "Adaptive 6G networks-in-network management for industrial applications," in *Proc. 16th Int. Conf. Netw. Future (NoF)*, Sep. 2025, pp. 114–116.
- [51] J. Zong, S. Yang, and H. Flinck, "Research report on RAN-CN converged architecture," O-RAN Alliance, Alfter, Germany, Tech. Rep. 2024-13. [Online]. Available: <https://mediastorage.o-ran.org/ngrg-rr/nGRG-RR-2024-13-Research%20Report%20on%20RAN-CN%20converged%20Architecture.pdf>
- [52] M. Corici, F. Eichhorn, and T. Magedanz, "Organic 6G continuum architecture: A uniform control plane across devices, radio, and core," *IEEE Netw. Lett.*, vol. 6, no. 1, pp. 11–15, Mar. 2024.
- [53] H. Buhr, E. Troudt, P. Chakraborty, C. Scheich, H. Zope, F. Eichhorn, G. Westerling, L. Naundorf, F. von Oertzen, S. Sritharan, P. Kalebe, E. Rygiel, M. Corici, and T. Magedanz, "Inside Open6GCore: From concept to code with the first 6G core network," in *Proc. IEEE 11th Int. Conf. Netw. Softwarization (NetSoft)*, Jun. 2025, pp. 115–120.
- [54] D. Anand, M. Gundall, and H. D. Schotten, "Implementation and evaluation of open and reproducible nf migration scenarios in a containerized 6G core network," in *Proc. IEEE Globecom Workshops (GC Wkshps)*, Dec. 2025, pp. 1–7.
- [55] M. Corici, F. Eichhorn, H. Ackermann, D. Hauer, J.-B. Gauthier, and R. Gertkemper, "Mixed-integer modeling for multi-criteria optimization of 6G service placement," in *Proc. IEEE 11th Int. Conf. Netw. Softwarization (NetSoft)*, Jun. 2025, pp. 277–284.
- [56] V. F. Monteiro, F. R. M. Lima, D. C. Moreira, D. A. Sousa, T. F. Maciel, B. Makki, and H. Hannu, "Paving the way toward mobile IAB: Problems, solutions and challenges," *IEEE Open J. Commun. Soc.*, vol. 3, pp. 2347–2379, 2022.
- [57] S. Ranjan, P. Jha, A. Karandikar, and P. Chaporkar, "A flexible IAB architecture for beyond 5G network," *IEEE Commun. Standards Mag.*, vol. 7, no. 3, pp. 64–71, Sep. 2023.
- [58] D. Lindenschmitt, B. Veith, M. Gundall, K. Alam, A. Daurembekova, M. A. Habibi, B. Han, D. Krummacker, P. Rosemann, and H. D. Schotten, "Nomadic non-public networks for 6G: Use cases and key performance indicators," in *Proc. IEEE Conf. Standards Commun. Netw. (CSCN)*, Nov. 2024, pp. 243–248.
- [59] D. Lindenschmitt, B. Veith, K. Alam, A. Daurembekova, M. Gundall, M. A. Habibi, B. Han, D. Krummacker, P. Rosemann, and H. D. Schotten, "Architectural challenges of nomadic networks in 6G," in *Proc. IEEE Globecom Workshops (GC Wkshps)*, Dec. 2024, pp. 1–6.
- [60] D. Lindenschmitt, M. R. Crippa, and H. D. Schotten, "Towards nomadic 6G communication networks: Implications on architecture, standardization, and regulatory aspects," in *Proc. IEEE Conf. Standards Commun. Netw. (CSCN)*, Sep. 2025, pp. 1–5.
- [61] M. Hoffmann et al., "A secure and resilient 6G architecture vision of the German flagship project 6G-ANNA," *IEEE Access*, vol. 11, pp. 102643–102660, 2023.
- [62] V. K. S. Boregowda, D. B. J. R. Sahu, D. R. J. Nayaka, D. S. Rai, S. Sharma, and B. Vinil, "Multi-RAT coordination frameworks in 6G wireless architectures," *J. Wireless Mobile Netw., Ubiquitous Comput., Dependable Appl.*, vol. 16, no. 2, pp. 755–774, Jun. 2025.

- 1463 [63] D. Lindenschmitt and J. Mertes, "6G underlayer network concepts for ultra  
1464 reliable and low latency communication in manufacturing," in *Proc. 28th*  
1465 *Eur. Wireless Conf. Eur. Wireless*, 2023, pp. 26–30.
- 1466 [64] T. Radig and H. Karl, "Draco: Dynamic resource allocation for concurrent  
1467 ML applications," in *Proc. IEEE 25th Int. Symp. Cluster, Cloud Internet*  
1468 *Comput. (CCGrid)*, May 2025, pp. 11–20.
- 1469 [65] M. Petri and N. Maletic, "ICAS-enabled predictive beam-steering for link  
1470 blockage mitigation in millimeter-wave systems," in *Proc. IEEE 6th Int.*  
1471 *Symp. Joint Commun. Sens. (JCS)*, Jan. 2026, pp. 1–6.
- 1472 [66] V. Kirchner and H. Karl, "Embedding delay-constrained VNF forwarding  
1473 graphs into reconfigurable WDM optical networks," in *Proc. Int. Conf.*  
1474 *Softw., Telecommun. Comput. Netw. (SoftCOM)*, Sep. 2023, pp. 1–6.
- 1475 [67] M. Rihan, D. Wübben, A. Bhattacharya, M. Petrova, X. Yuan,  
1476 A. Schmeink, A. Fellan, S. Tayade, M. Zarour, D. Lindenschmitt, H. Schot-  
1477 ten, and A. Dekorsy, "Unified 3D networks: Architecture, challenges,  
1478 recent results, and future opportunities," *IEEE Open J. Veh. Technol.*,  
1479 vol. 6, pp. 1–31, 2025. [Online]. Available: [https://ieeexplore.ieee.org/  
1480 document/10770553](https://ieeexplore.ieee.org/document/10770553)

1481 **FABIAN EICHHORN** (Member, IEEE) received the Diploma degree in  
1482 computer engineering from Technische Universität Berlin (TUB). He was  
1483 with the Architekturen der Vermittlungsknoten (AV) Chair of TUB,  
1484 from 2014 to 2017, and since 2015, he has been with Fraunhofer Institute  
1485 for Open Communication Systems (FOKUS) Software-Based Networks  
1486 (NGNI) Competence Center. He is currently a Research Engineer with  
1487 NGNI. He has contributed to research and development efforts in various  
1488 German and EU projects. His current fields of research interests include  
1489 future mobile networks and Internet technologies, such as beyond 5G mobile  
1490 networks, organic 6G networks, and private 5G+ networks.

1491 **ROLAND BLESS** (Member, IEEE) received the Diploma degree in computer  
1492 science from the University of Karlsruhe, in 1996, the Ph.D. (Dr.-Ing.) degree  
1493 in the realm of quality of service management, in 2002, and the Habilitation  
1494 degree in computer science from the Department of Informatics, Karlsruhe  
1495 Institute of Technology (KIT), in 2009. Since 1998, he has contributed to  
1496 Internet standardization in the IETF. He is currently an Assistant Professor  
1497 and a Senior Researcher with the Institute of Telematics (group of Prof.  
1498 Zitterbart), KIT. His current fields of research interests include autonomous  
1499 control planes for 6G and future networks, scalable zero-touch routing  
1500 protocols, and congestion control. He is a member of Gesellschaft für  
1501 Informatik, ACM SIGCOMM, IEEE ComSoc, and ISOC.

1502 **PAUL SEEHOFER** (Graduate Student Member, IEEE) received the M.Sc.  
1503 degree in computer science from Karlsruhe Institute of Technology (KIT),  
1504 in 2021, where he is currently pursuing the Ph.D. degree with the Institute of  
1505 Telematics (group of Prof. Zitterbart). His research interests include routing  
1506 protocols, autonomic networking, and network management simplification.

1507 **MICHAEL GUNDALL** received the M.Sc. and Ph.D. degrees in electrical  
1508 and computer engineering from RPTU Kaiserslautern–Landau, Germany, in  
1509 2017 and 2025, respectively. Since 2017, he has been with the Intelligent  
1510 Networks Department, German Research Center for Artificial Intelligence  
1511 GmbH (DFKI), Kaiserslautern, Germany, where he is currently leading the  
1512 Cyber Resilience and Security Team. His current research interests include  
1513 security and real-time capabilities of industrial communication systems,  
1514 including non-public 5G and 6G networks.

**DANIEL LINDENSCHMITT** received the M.Sc. degree, in 2019. He is  
1515 currently a Research Member with the Chair of Wireless Communication  
1516 and Navigation, RPTU Kaiserslautern–Landau. He is part of the Institute for  
1517 Wireless Communication and Radio Positioning. In various German, EU,  
1518 and industry projects, he is researching and developing in the area of future  
1519 mobile network standards. His current fields of research interests include  
1520 coexistence management, nomadic cellular networks, networks-in-networks  
1521 for 6G and multi-RAT approaches, and communication technologies, such  
1522 as 5G mobile networks or private 5G networks and future technologies  
1523 for 6G.  
1524

**BASTIAN BLOESSL** (Member, IEEE) received the M.Sc. degree in  
1525 computer science from the University of Würzburg, Germany, in 2011,  
1526 and the Ph.D. degree in computer science from Paderborn University,  
1527 Germany, in 2018. He is currently a Postdoctoral Researcher with the  
1528 Secure Mobile Networking Laboratory, TU Darmstadt, Germany. Before  
1529 moving to Darmstadt, he was a Research Fellow with the CONNECT  
1530 Center, Trinity College Dublin, and Ireland's Research Center for Future  
1531 Networks and Communications, where he was funded through a Marie  
1532 Skłodowska-Curie Fellowship. His research focuses on software-defined  
1533 wireless communication systems.  
1534

**DAVID VOLZ** received the M.Sc. degree in computer science and  
1535 information systems technology from the Technical University of Darmstadt,  
1536 Germany, in 2021, where he is currently pursuing the Ph.D. degree with the  
1537 Embedded Systems and Applications (ESA) Group. His research interests  
1538 include hardware acceleration on an FPGA for next-generation wireless  
1539 communication systems.  
1540

**NAVID KESHTIARAST** (Graduate Student Member, IEEE) received the  
1541 M.Sc. degree in electrical engineering and information technology from  
1542 the Technical University of Dortmund, Germany, in 2020. He is currently  
1543 pursuing the Ph.D. degree with the Mobile Communications and Computing  
1544 (MCC) Group, RWTH Aachen University, Germany. His current research  
1545 interests include next-generation wireless networks, spectrum sharing, and  
1546 the design of AI/ML-driven communication protocols for future wireless  
1547 networks.  
1548

**HENDRIK BORCHERT** received the M.Sc. degree in computer science  
1549 from Humboldt University of Berlin, Germany, in 2022. He is currently  
1550 pursuing the Ph.D. degree with the System Architectures Department,  
1551 Leibniz Institute for High Performance Microelectronics (IHP), Frankfurt  
1552 (Oder), Germany. His research interests include data link layer design  
1553 with a focus on hardware acceleration and radio resource scheduling for  
1554 next-generation wireless communication systems.  
1555

**MARKUS PETRI** received the Dipl.-Ing. (M.S.E.E.) degree from TU  
1556 Berlin, Germany, in 2006, and the Dr.-Ing. (Ph.D.) degree from BTU  
1557 Cottbus, Germany, in 2012. Until 2020, he was an Engineer, a Scientist,  
1558 and the Project Leader, focusing on the design and implementation of  
1559 high-performance signal processors. From 2020 to 2023, he was the Head  
1560 of Technology Transfer at IHP Solutions GmbH, Germany. Since 2023,  
1561 he has been with IHP, where he leads the research group Real-Time  
1562 Communication and Sensing Systems as well as IHP's research activities  
1563 in the BMFTR-funded projects Open6GHub and xG-RIC. He coordinated  
1564 the Horizon Europe Project COCHISA, until 2023, and has contributed  
1565 to several collaborative research projects, including fastSecure, 5G-XHaul,  
1566 ProWiLan, Prelocate, and EASY-A. His research interests include joint  
1567 communication and sensing, appropriate PHY-layer hardware architectures,  
1568 real-time implementations, and resilient systems.  
1569

**ELENA-RAMONA MODROIU** (Member, IEEE) received the master's degree in computer science from the Politehnica University of Bucharest, Romania, in 2003, and the Postgraduate degree from Valencia Polytechnic University, Spain. She is currently a Researcher with Technische Universität Berlin, Germany. Her research work covers the field of 5G mobile networks, end-to-end setups with a focus on core networks, and the evolution from 5G to 6G mobile networks. She has been actively involved in VoIP/SIP, co-founding the Kamailio open source project, the SIP server at the core of IMS solutions for 4G/5G open-source based deployments.

**JOEL JOHN** received the M.Sc. degree in computer science from Technische Universität Berlin, Germany, in 2024. He has been a Researcher with the Technische Universität Berlin in the Next Generation Networks (AV) Chair, since 2024. Prior to this, he was a Student Researcher at Fraunhofer FOKUS in the Next Generation Network Infrastructure (NGNI) Department. His current areas of research interest includes beyond 5G and 6G mobile network technologies.

**HOSSEIN MOHAMMADALIZADEH** received the M.Sc. degree in telecommunications engineering from Politecnico di Milano, Italy, in 2023. He is currently pursuing the Ph.D. degree with the Internet Technologies and Softwarization (ITSW) Chair, Hasso Plattner Institute (HPI), Germany. Prior to this, he was a Student Assistant with the Wireless Networking Group, IMDEA Networks Institute, Spain. His current areas of research interests include the reconfiguration of networks and microservice chains.

**THEO RADIG** received the M.Sc. degree in IT-systems engineering from Hasso Plattner Institute (HPI), Germany, in 2024, where he is currently pursuing the Ph.D. degree with the Internet Technologies and Softwareization (ITSW) Chair. His research focuses on cost-effective operation of hardware accelerators, such as GPUs, particularly for machine learning workloads.

**LEONARD PAELEKE** (Graduate Student Member, IEEE) received the B.Eng. degree in mechanical engineering from the Berliner Hochschule für Technik (BHT), in 2018, and the M.S. degree in computational engineering from the TU Berlin, in 2022. Since April 2022, he has been a Doctoral Researcher with the Internet-Technologies and Softwarization Group, Hasso Plattner Institute (HPI). His research interests include machine learning for networks, networks for machine learning, distributed machine learning, and their application in mobile telecommunication networks, such as 6G.

**HEINER ACKERMANN** received the degree in computer science from TU Dortmund University and the Ph.D. degree in theoretical computer science from RWTH Aachen University, in 2009. Since 2009, he has been conducting research at the Fraunhofer Institute for Industrial Mathematics (ITWM), Kaiserslautern. In 2022, he took over as the Head of the Operations Research Department. Today, his work focuses on mathematical modeling and optimization of complex planning problems. His research interest includes the modeling and analysis of distributed systems using game theory concepts.

**DANIEL HAUER** received the bachelor's degree in mathematics from TU Braunschweig, and the master's degree from the TU Munich, in 2023. Since 2023, he has been employed as a Scientific Researcher with the Fraunhofer Institute for Industrial Mathematics (ITWM), Kaiserslautern. His primary research interests include discrete optimization, with a focus on developing novel algorithms and methodologies. He has contributed to projects addressing complex combinatorial problems and real-world industrial applications.

**MARIUS-IULIAN CORICI** received the Diploma degree in engineering from the Politehnica University of Bucharest, with a focus on nomadic satellite-based VoIP infrastructure, and the Ph.D. degree, with a focus on self-adaptable IP control in carrier-grade mobile operator networks, in 2013. Currently, he is the Deputy Head of the Software-Based Networks Division, Fraunhofer FOKUS, leading the research and development teams for the Open5GCore ([www.open5gcore.org](http://www.open5gcore.org)), Open6GCore ([www.open6gcore.org](http://www.open6gcore.org)), and OpenLANES (<https://openlanes.net/>) toolkits and acting as a Research Pathfinder for the evolution toward vertical sectors and wide area networks as well as the design and specification of novel beyond-5G features and 6G architectures. He is a Senior Researcher with the Fraunhofer FOKUS Institute. Furthermore, he is acting as a Researcher with the Technische Universität Berlin, preparing the lectures on 5G of the chair for next generation networks (Architekturen der Vermittlungsknoten-AV) ([www.av.tu-berlin.de](http://www.av.tu-berlin.de)).

**MARINA PETROVA** (Member, IEEE) received the Diploma degree in electronics engineering and telecommunications from Ss. Cyril and Methodius University in Skopje, North Macedonia, and the Ph.D. degree in electrical engineering from RWTH Aachen University, Aachen, Germany. She is currently a Professor of wireless communications with RWTH Aachen University and a Visiting Professor with the School of Electrical Engineering and Computer Science, KTH Royal Institute of Technology, Stockholm, Sweden. Her research interests include the design and optimization of future intelligent wireless systems, millimeter-wave, and ISAC technologies, joint radio access and mobile computing, and spectrum sharing. She was a recipient of the Future Research Leader Award from Swedish Foundation for Strategic Research and was named a Wallenberg Academy Fellow in 2019.

**THOMAS MAGEDANZ** (Senior Member, IEEE) has been a Professor with Technische Universität Berlin, Germany, leading the Chair for next-generation networks ([www.av.tu-berlin.de](http://www.av.tu-berlin.de)), since 2004. In addition, he has been the Director of the Business Unit Software-Based Networks (NGNI), Fraunhofer Institute for Open Communication Systems FOKUS ([www.fokus.fraunhofer.de/go/ngni](http://www.fokus.fraunhofer.de/go/ngni)), Berlin, since 2003. For 33 years, he has been a globally recognized ICT expert, working in the convergence field of telecommunications, Internet, and information technologies, understanding both the technology domains and the international market demands. His interest is in software-based networks for different verticals, with a strong focus on public and non-public campus networks. His current interest is in the evolution from 5G to 6G.

**HANS D. SCHOTTEN** (Member, IEEE) received the Diploma and Ph.D. degrees in electrical engineering from Aachen University of Technology (RWTH), Germany, in 1990 and 1997, respectively. He held positions, such as a Senior Researcher, a Project Manager, and the Head of research groups at RWTH, Ericsson Corporate Research, and Qualcomm Corporate Research and Development. At Qualcomm, he was the Director of technical standards and a Research Coordinator for Qualcomm's participation in national and European research programs. Since 2007, he has been a Full Professor and the Head of the Chair for Wireless Communications and Navigation, Technical University of Kaiserslautern. Since 2012, he has been the Scientific Director of the Intelligent Networks Research Group, German Research Center for Artificial Intelligence GmbH. His research interests include wireless communication, including 5G and 6G.