


Optimal Virtual Aperture

Pain or pleasure.


M. Zapf, N.V. Ruiter

INSTITUTE OF DATA PROCESSING AND ELECTRONICS

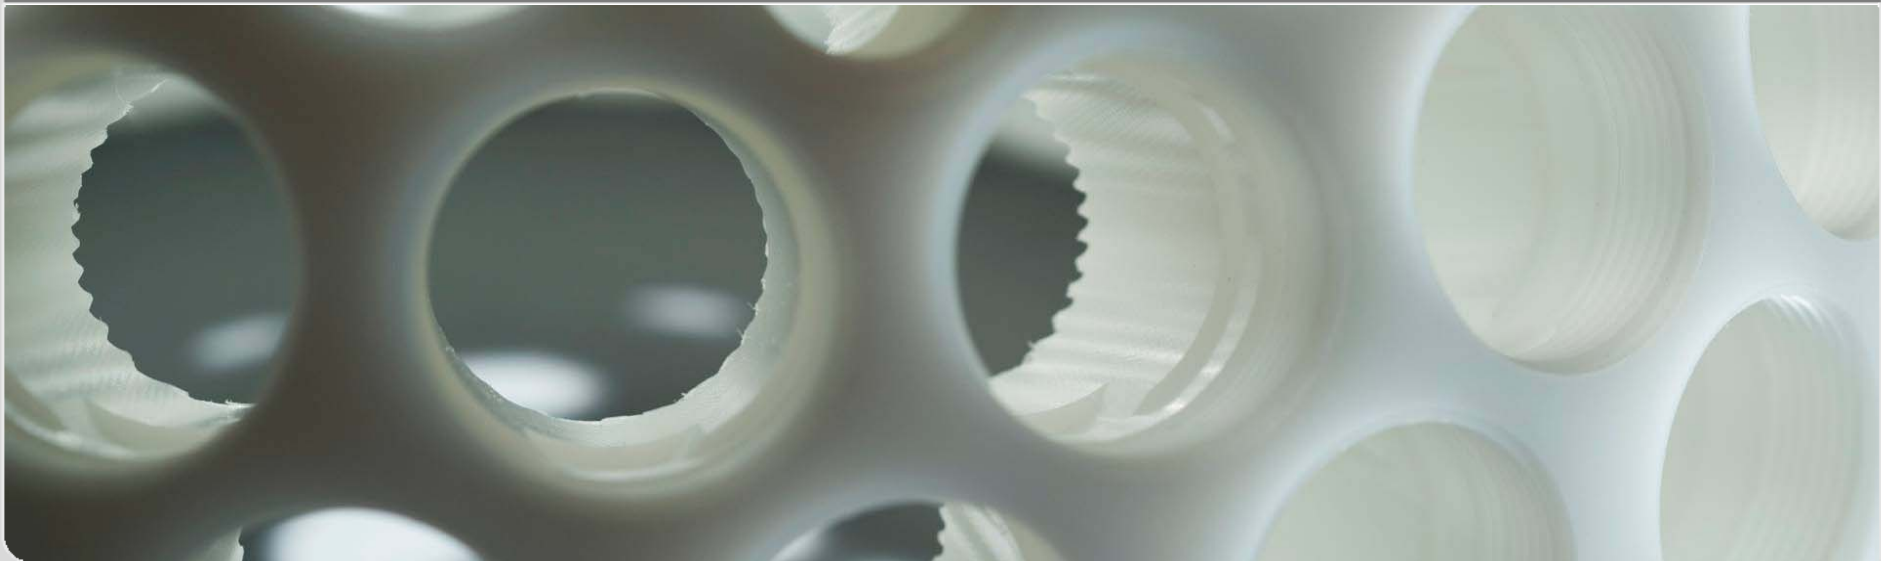

Motivation

- USCT has an highly sparse spatial sampling approach (sparse aperture)
 - (Or to name it directly, we have way too less transducers...)
- Therefore, to be able to reduce this sparsity of the aperture two degrees of freedom were added to the USCT
 - Rotation (+/- 20°)
 - Lift (0...0.03m)
- The moved aperture in a new position is called „virtual aperture“

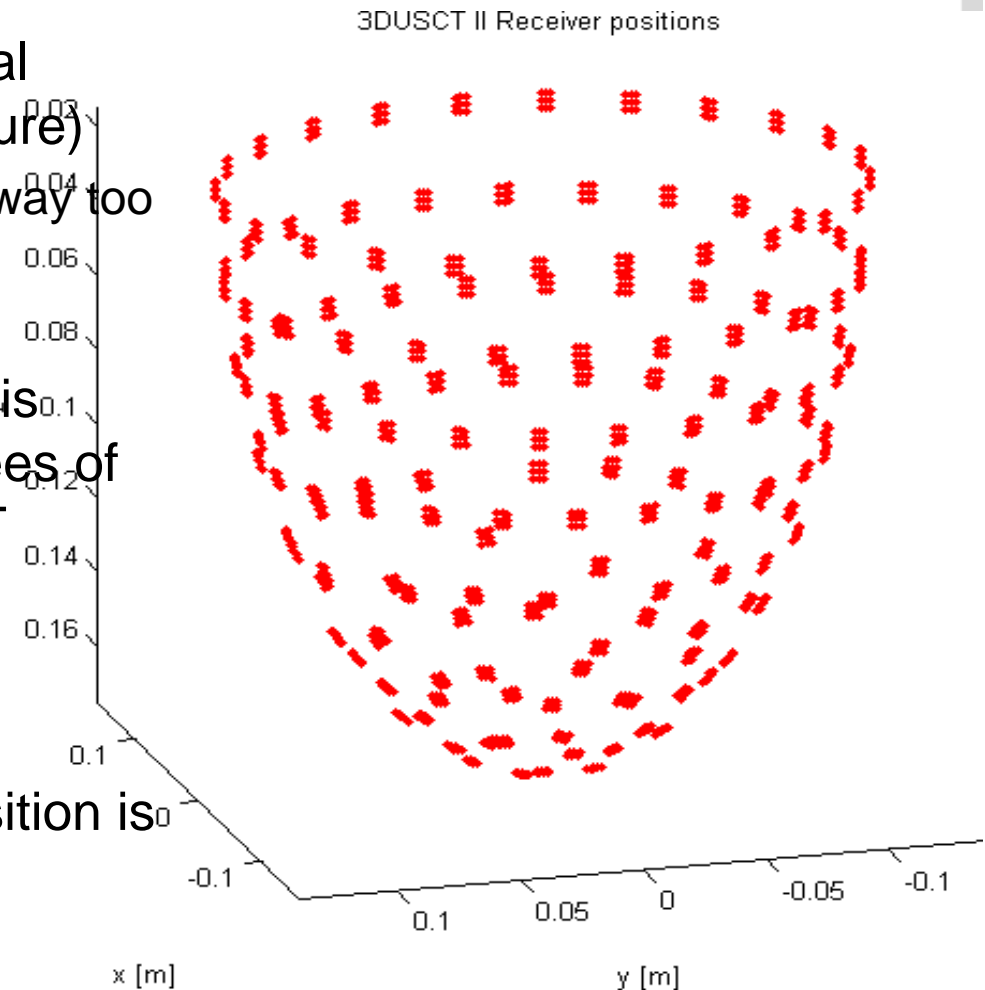


Problem: What is a optimal Aperture?


- „Optimality“ criteria not completely clear...
 - Maybe equidistanted? (homogeneous sampling of angles)
 - As non-periodic as possible? („Compressive sensing“-motivation)
 - Minimized travel-time? (reduce overall measurement time)

First approach: Evolutionary probing

- Idea:
 - Maximizing the distance between all transducers
 - While minimizing the travel-way
- Problem: combinatoric explosion
- Evolutionary approach:
 - randomly „probing“ the space of possible 3-d virtual apertures
 - Adapting of good solutions
- Leads to satisfying results
 - still computational demanding (days)
 - not guaranteed to find the „optimal“ solution

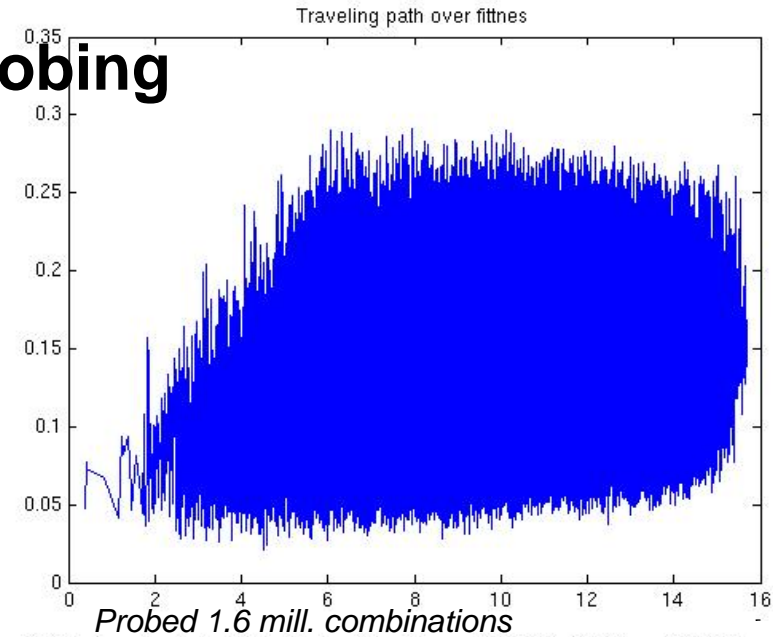

2D Hist of vectors for best trial with travelling distance $4.623086e-02$, fitness 1342837

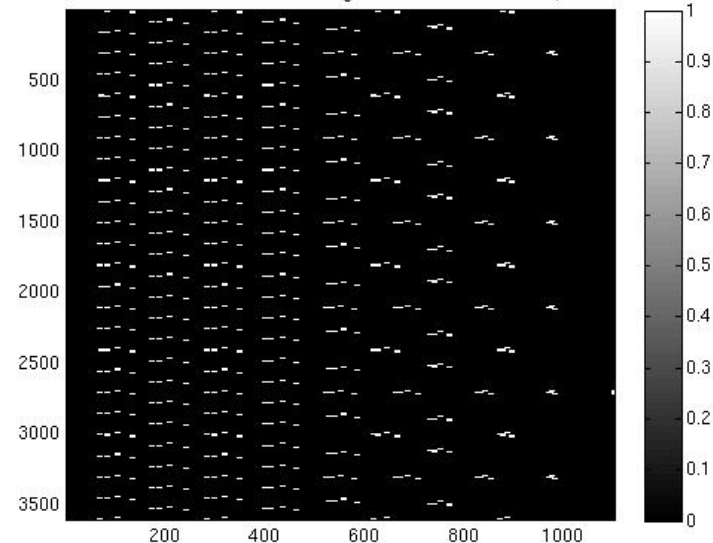

2d projection: Selected best 4 virtual apertures

Second approach: Correlation formulation

■ Problem



- For the study in Jena a new set of (bigger) virtual apertures was needed... fast!

■ Idea:

- A good virtual aperture is as much as possible „unsimilar“ to itself (or the worst VA is the aperture itself)
- Well known problem in signal theory: autocorrelation gives some kind of self-similarity
- A good virtual aperture has a minimal autocorellation in some domain
- Our domain is defined by the two degrees of freedom roation and lift, therefore now a 2-d problem only

Transformation in 2D domain

- Projection in 2D domain
 - Padding of Lift dimension to prevent „leaking“ (non-periodic dimension)
 - Non-padding of rotational dimension as this one is periodic

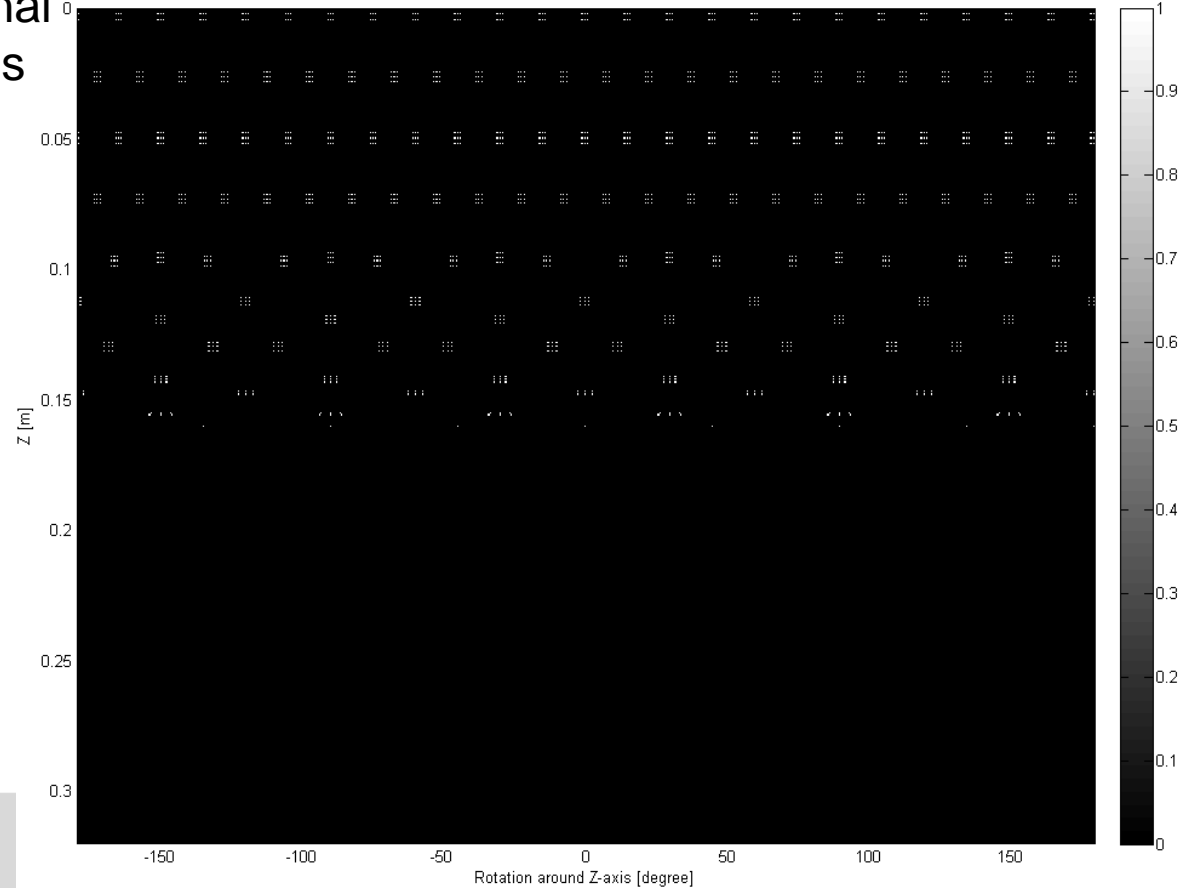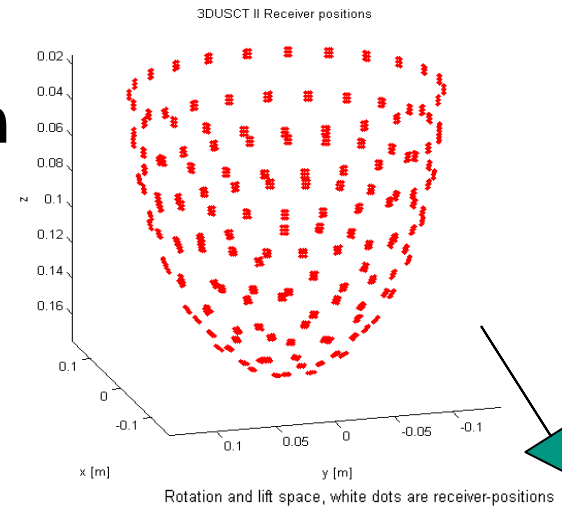



Modeling the distance

■ Problem:

- Aperture is represented as infinite small points
- Correlation is indifferent for various non-equal positioned solutions



■ Idea:

- Give the aperture some spatial extend
- Gauss weighting: more far away less „spatial influence“
- Leads to „equidistanted“ solutions

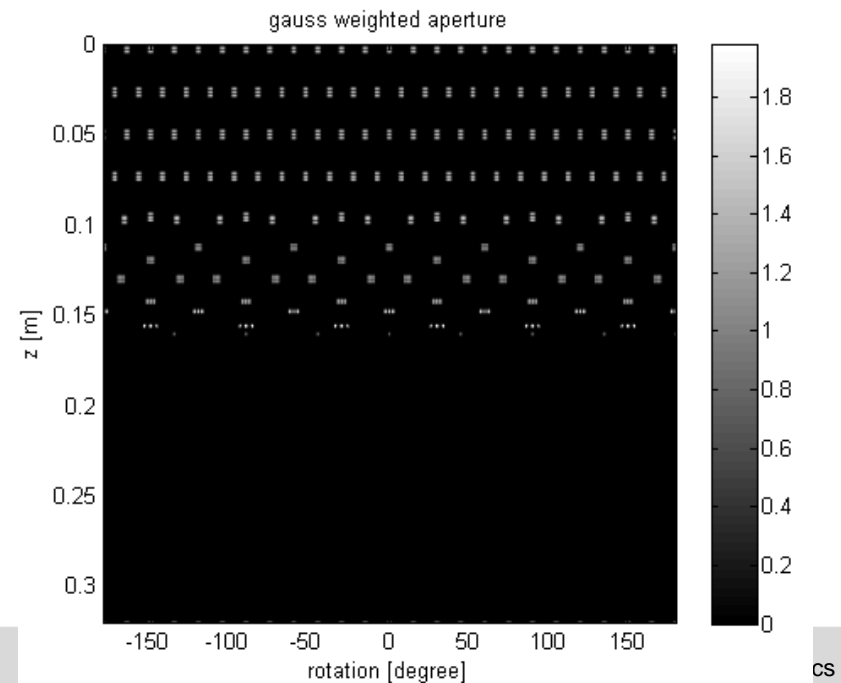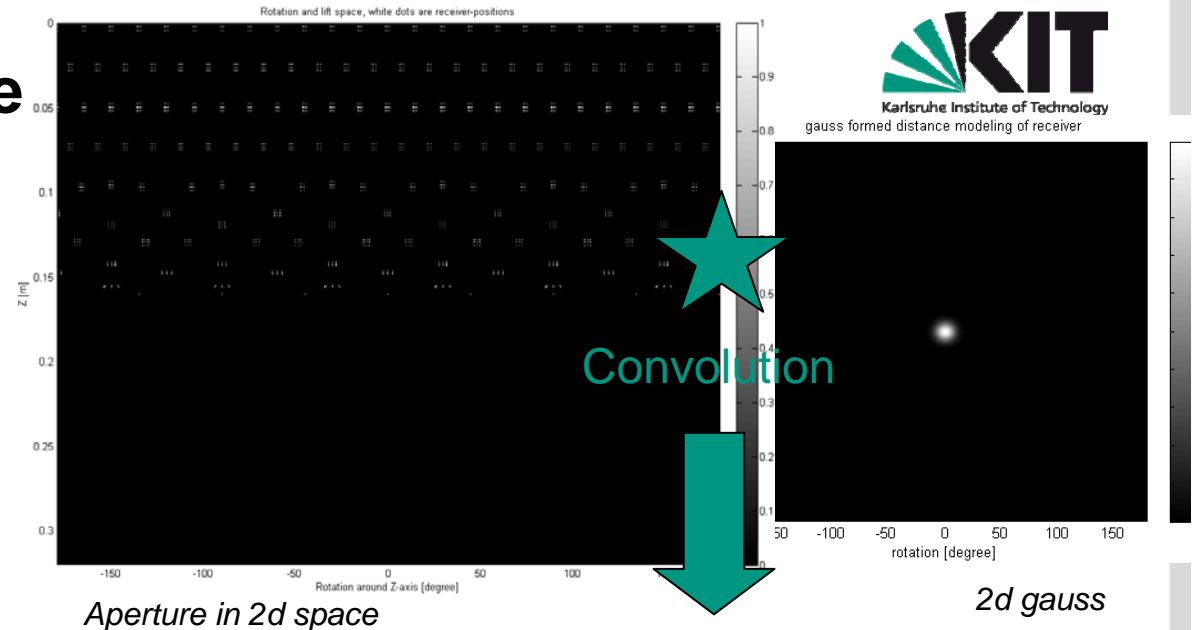

(auto-)Correlation



- Correlation of the apertures
- Minima are preferable virtual apertures
 - Lift dimension shows good properties
 - Rotation is pretty periodic
- Problem
 - Not all positions are possible or preferable

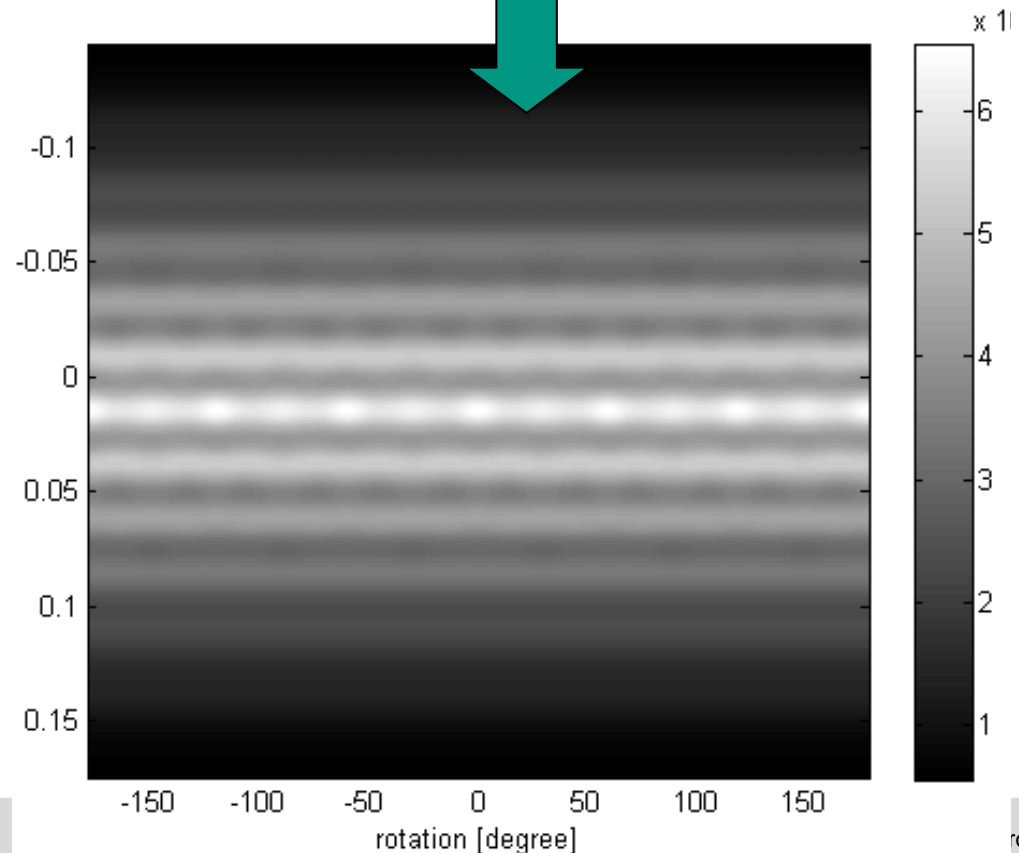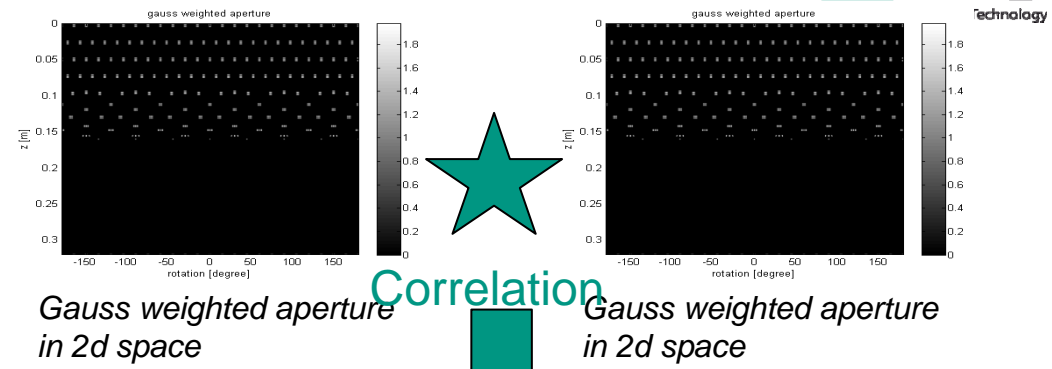

Refinement of the model

- Modeling of technical limitations
 - Weighting of the correlation with rectangular window



- Modeling of the movement costs
 - Weighting of the correlation with some a 2d gauss as distance function

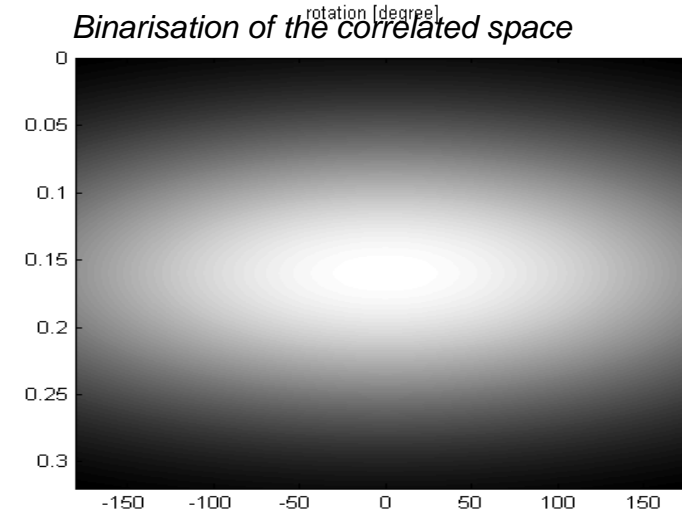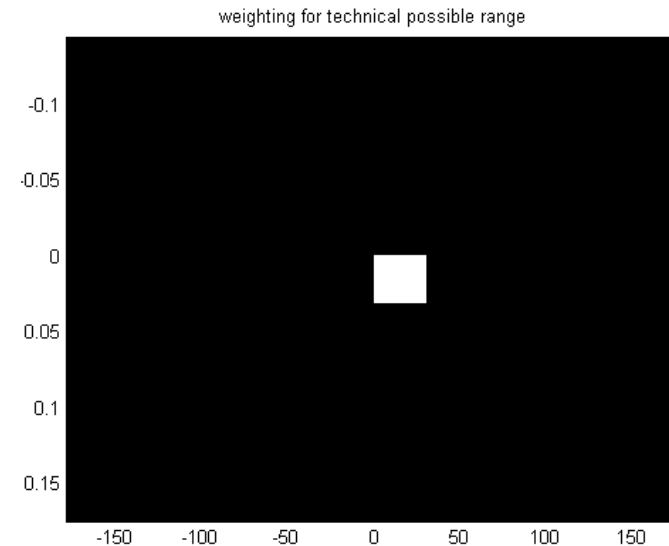

Gauss weighting around the actual aperture position (modeling of the movement cost)



Finding of Optimum

- Multiplication of weightings into correlation
- Inversion & search for maximum
 - In first step: 0.0125m lift and -0.5° rotation optimal

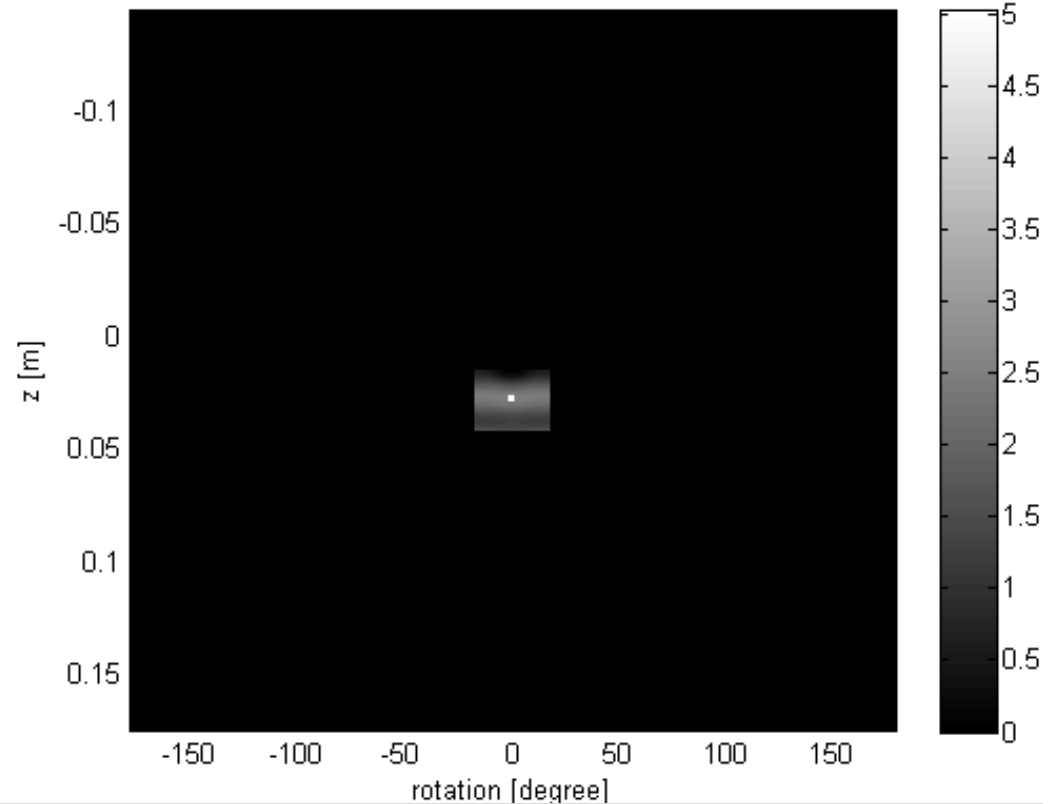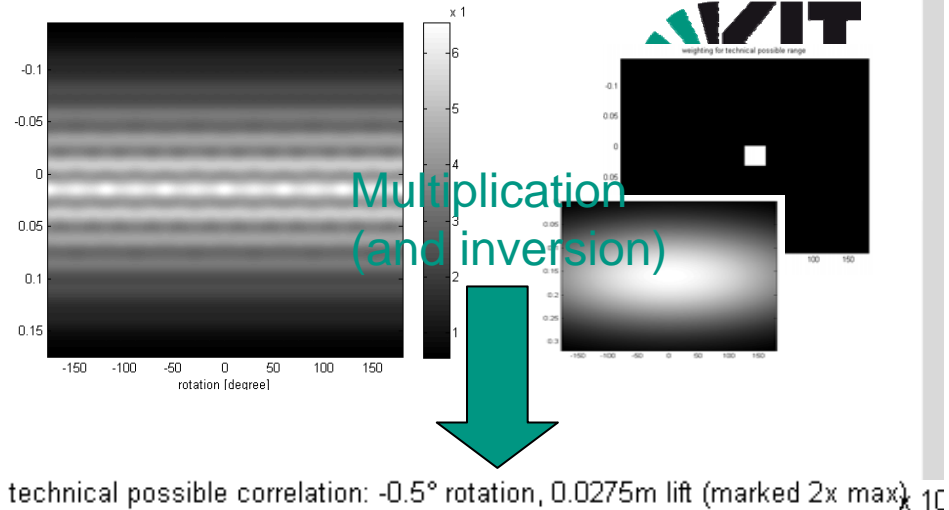

Creating of the new VAperture

- Adapting the aperture with the found lift and rotation and add this to the base aperture
- Continue this iterative process
- ...

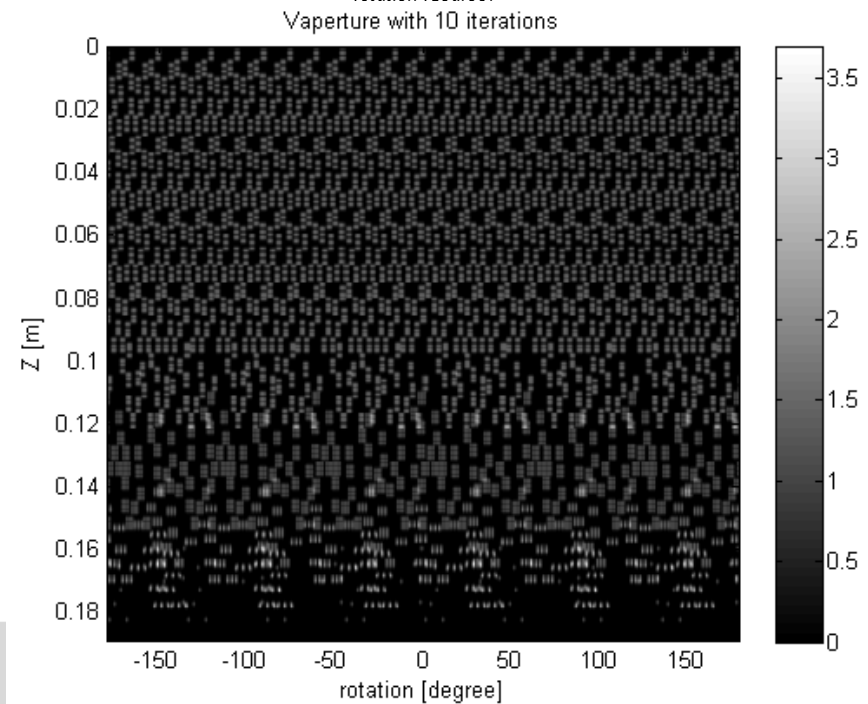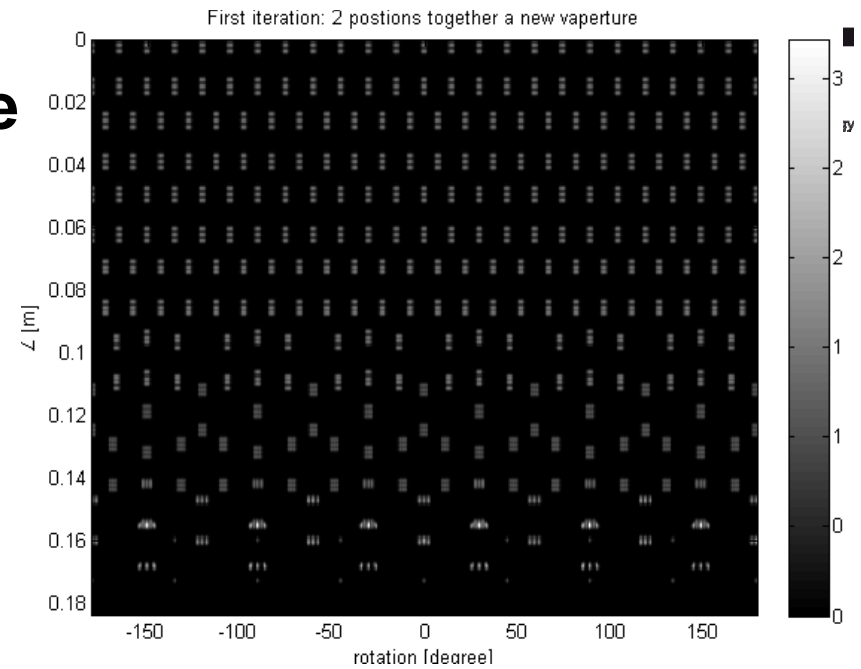


Results and conclusion

- Finds optimal (maximum mean equidistant) virtual apertures
- Fast! (seconds per iteration)
- Modeling of technical limitations and travel cost possible

- Conclusions and Discussion
 - Rotation dimension offers especially in the first iterations limited gain -> aperture too periodic especially in the rotation dimension?
 - better performance of Lift dimension because auf more chaotic distribution?
 - Relation to compressive sensing and random distributed spatial sampling?
 - Resulting virtual aperture shows a reduction in periodicity
 - Autocorrelation a useful metric for evaluating apertures overall?

Thanks!

VA1.0, std: 0.20296, mean: 0.049134, max: 1.9819 median: 1.1479e-008

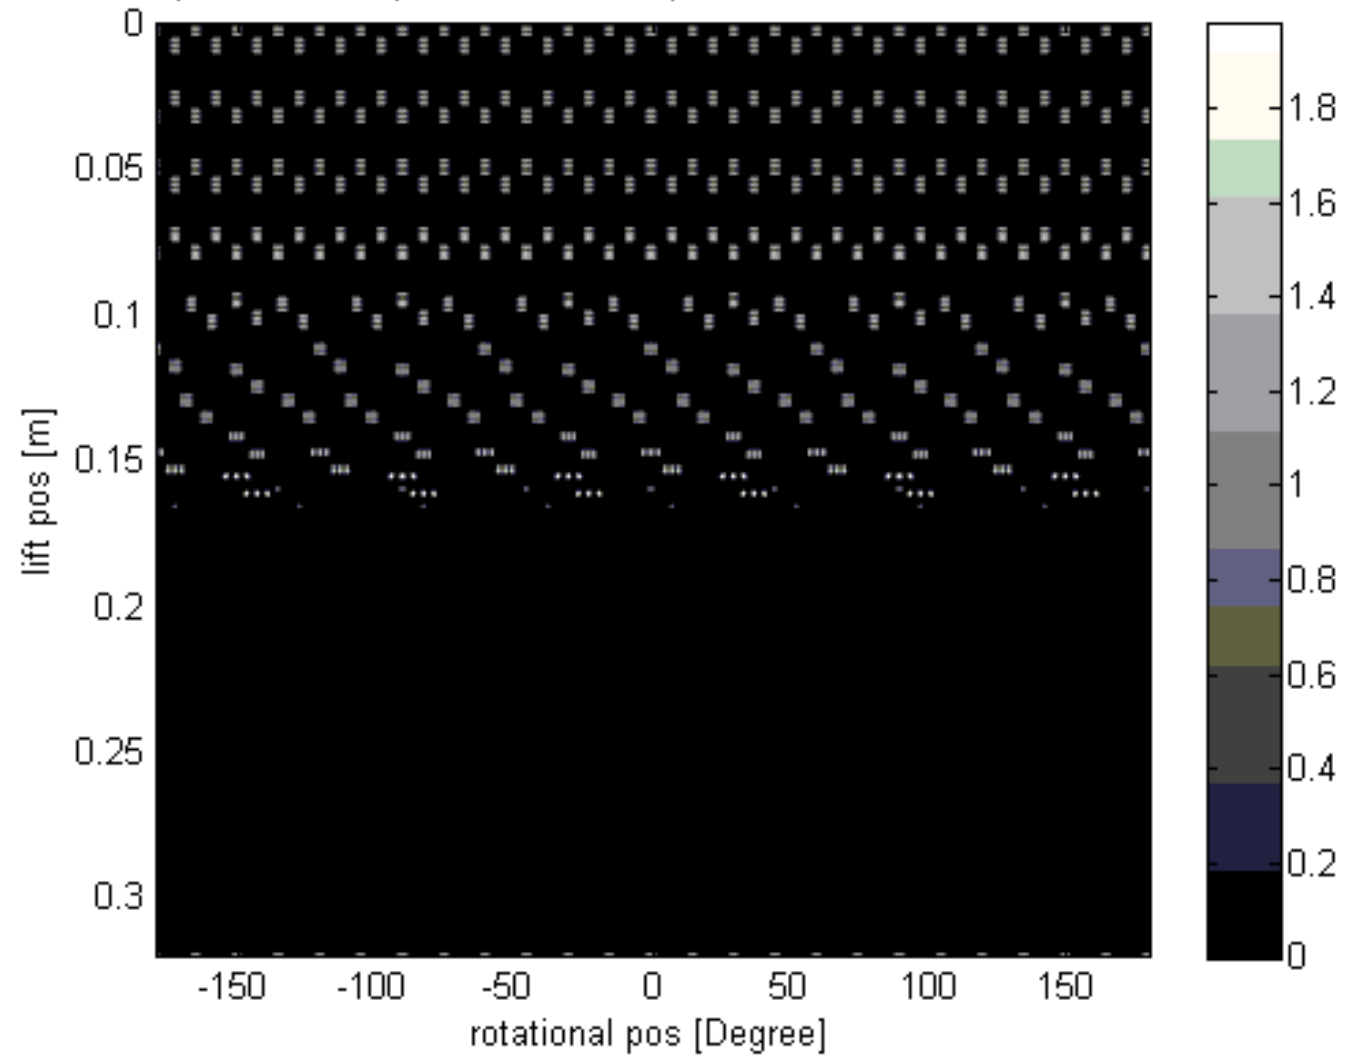



DAQ Constraints

- Transducer frequency sensitivity reaches from 1.3 MHz to 3.3 MHz (~95% drop-off BW)
- According to Shannon-Nyquist*:

$$f_{sampling} = 2 \times f_{max}$$



- For DAQ 6.6 MHz would be fine...
 - ADCs 20MHz
 - FLT data storage to DDR in 10MHz
- 1/3 is not enough....

* if the lowest frequency is zero

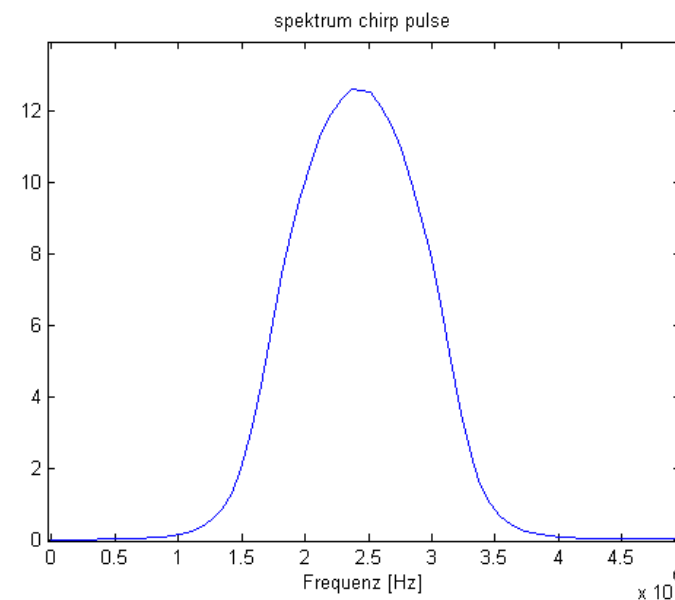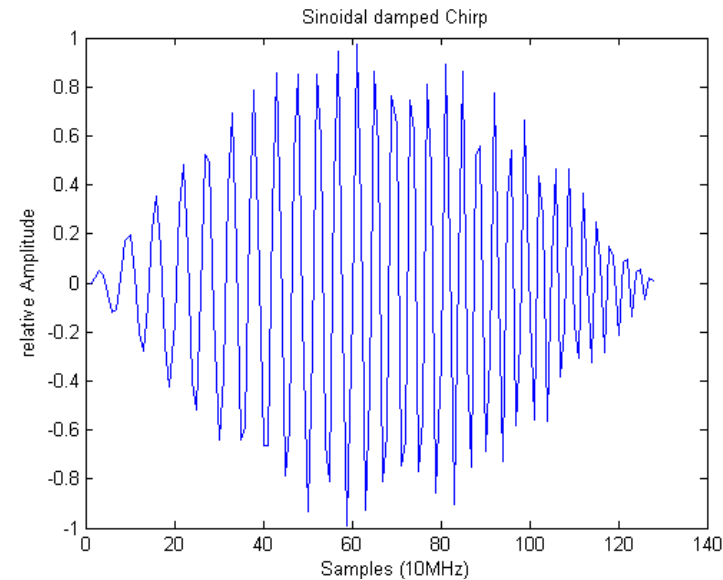


FLT DAQ Chain

- ADC 12Bit, 20MHz
- FLT
 - 32 order FIR antialiasing filter (lowpass)
 - Decimation by 2, basically throwing samples away
 - Averaging (max 256 times)
 - Storing as 16Bit, 10MHz in DDR

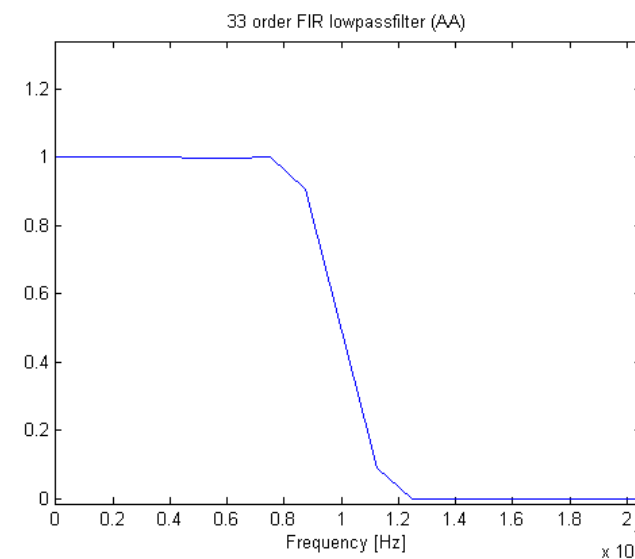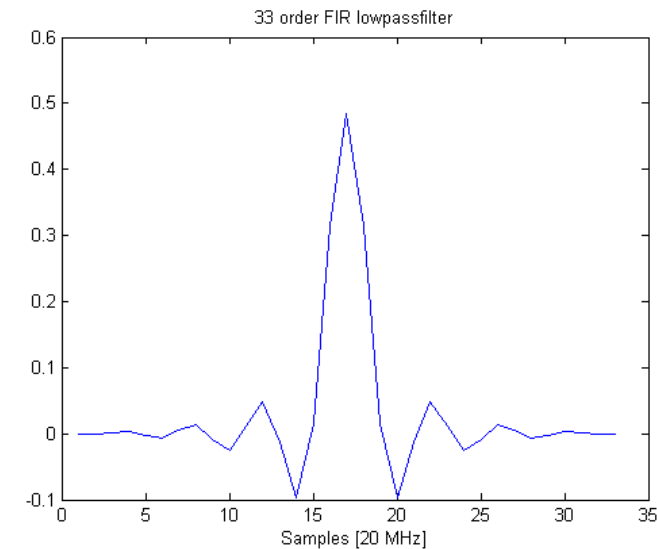

Wasting of „Fourier space“?

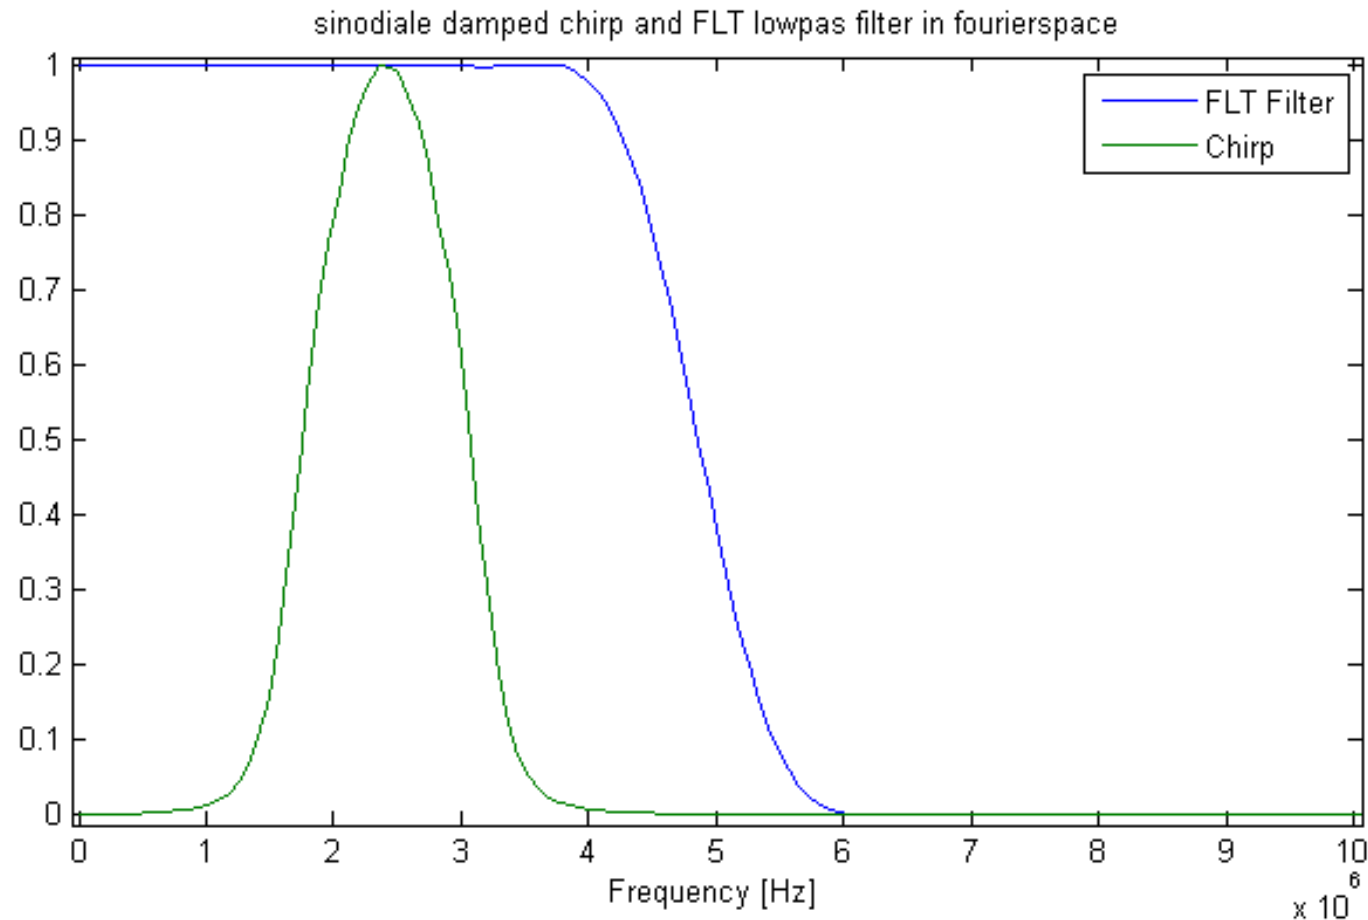

- Actually, only 1/3 of the sampled frequency bands are used!

Back to the basics: Nyquist II

- Shannon-Nyquist*:

$$f_{\text{sampling}} = 2 \times f_{\text{max}} = 6,6\text{MHz}$$

* if the lowest frequency is zero!!!

- General Shannon-Nyquist:



$$f_{\text{sampling}} = 2 \times (f_{\text{max}} - f_{\text{min}})$$

$$f_{\text{sampling}} = 2 \times (3.3\text{MHz} - 1.3\text{MHz}) = 4,0\text{MHz}$$


- How can this be exploited in the existing setup?

Idea: Bandpass subsampling


- Just exchange parameters: FLT filter coefficients and decimation step width!
- Roughly 1/3 of the fourierspace is used:
 - Instead of decimation 2, decimation 6
- Instead of a lowpass filter, a bandpass filter
 - „Reserves“ the lower band for the high-freqs which alias into the lower band (not seperateable anymore!)
- Additionally, increase the filter order from 32 to 207 (sharper edges)

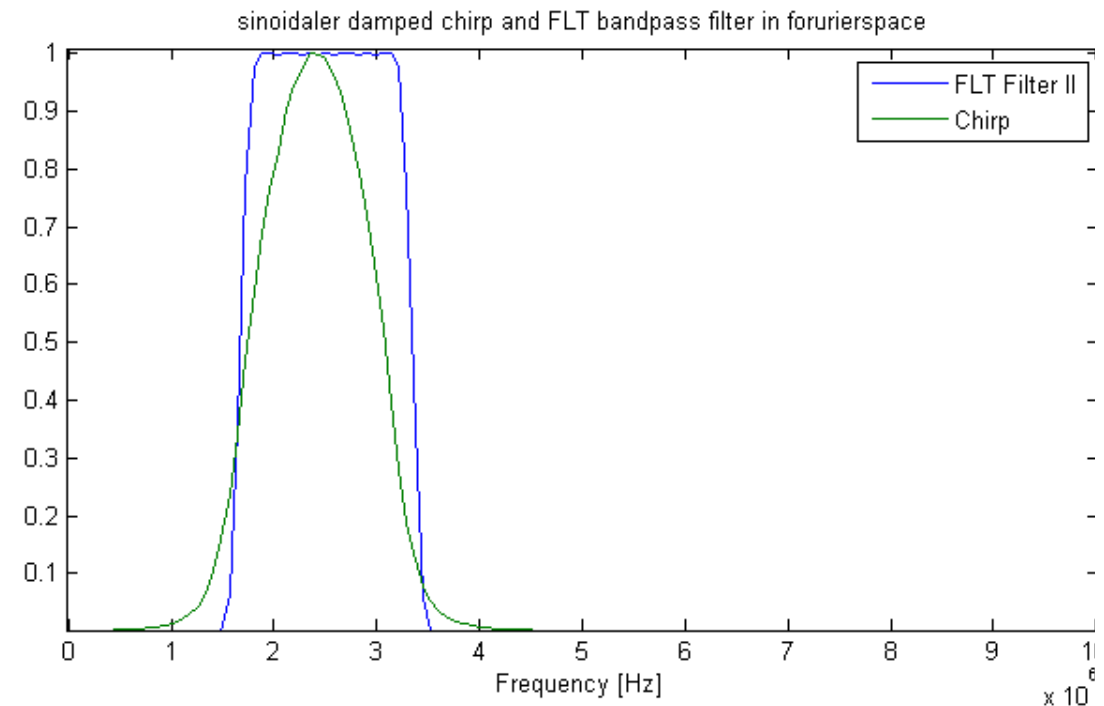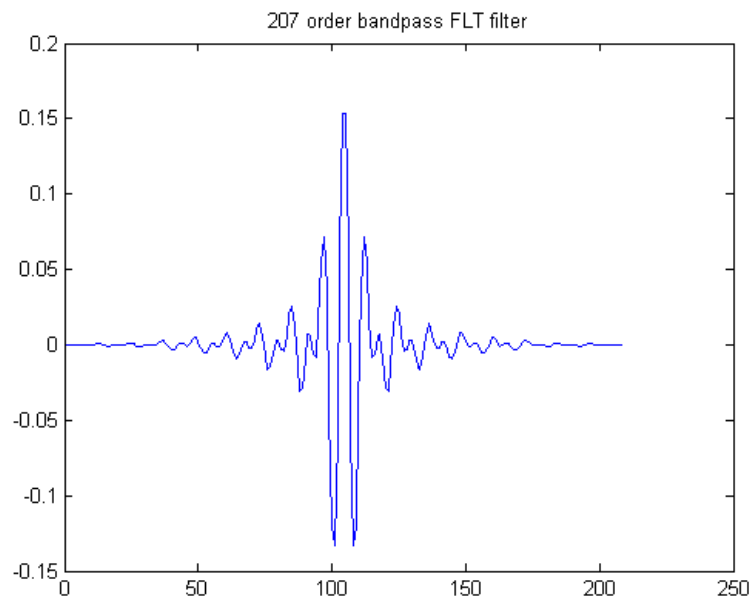


Evaluation: Simulation

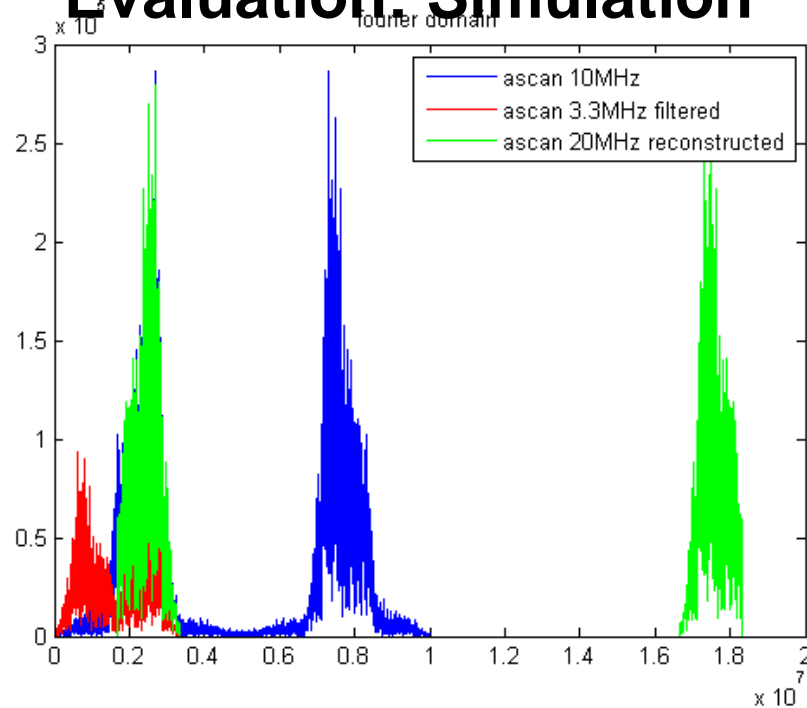


- Simulation with empty measurement signals (ascans)
 - Up-sampled to 20MHz
 - Applied second filter
 - decimated by 6 to 3.3MHz
 - Reconstucted to 20MHz

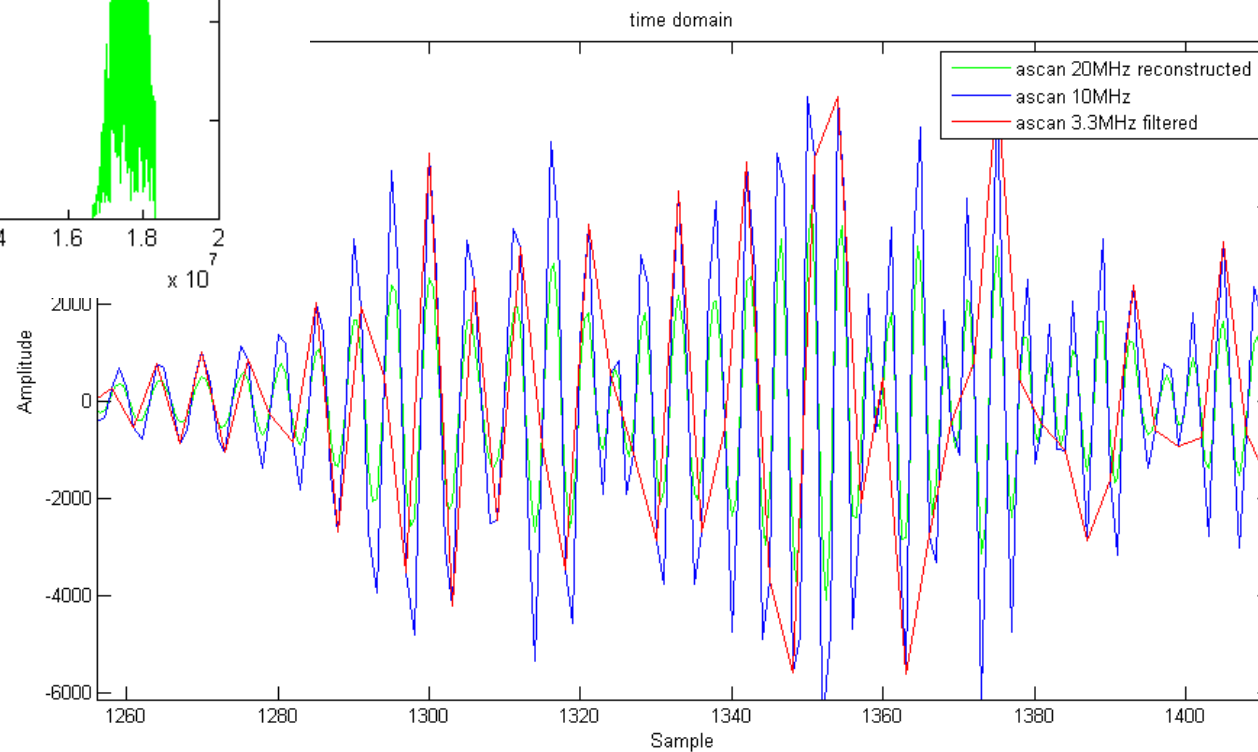

Evaluation: Real Measurements

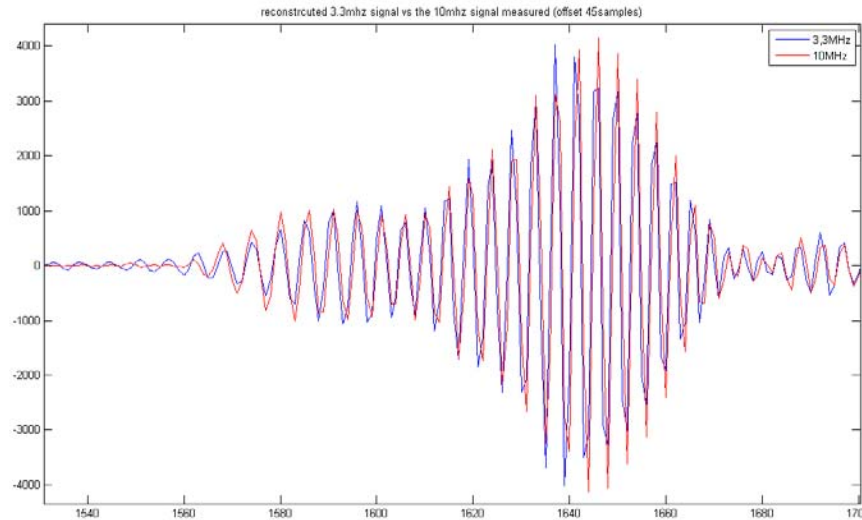

figure; plot(1:3000,Data2,43:3042,ascans(2:end,1),'r')

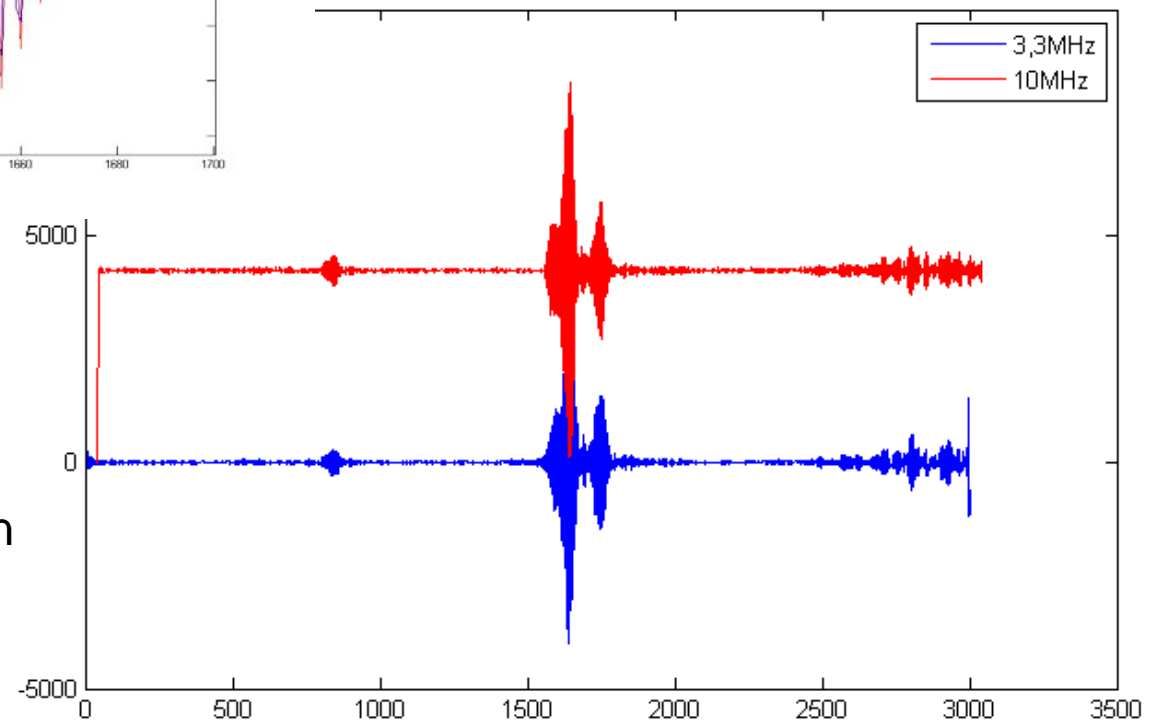


- Two sequential empty measurements
 - first with 10MHz filter
 - Second with 3.3MHz filter
 - Afterward reconstruction in software

Result & Discussion

- Data reduction instead of data rate increase
 - Speedup by factor 3
- OR
 - 3 times more measurements possible(!)
- Small potential bandwidth loss, partly compensated by better filter order
- Changed time Offset (only approx. $\frac{1}{2}$ filterlength)

Concept 1: Separation of Concerns

- Solution: separate the concerns, introduce another dimension!
 - Only „spatial aspect“, file and directories, are handled by the OS directory tree
 - „Changes over time“ by some other mechanism -> revision control system
- 2D approach!
- Typical advantages
 - Automated, standardized
 - Meta-data possible (Tags, comments, authors ...)
 - Fine-grained
 - Duplication removed (save space)

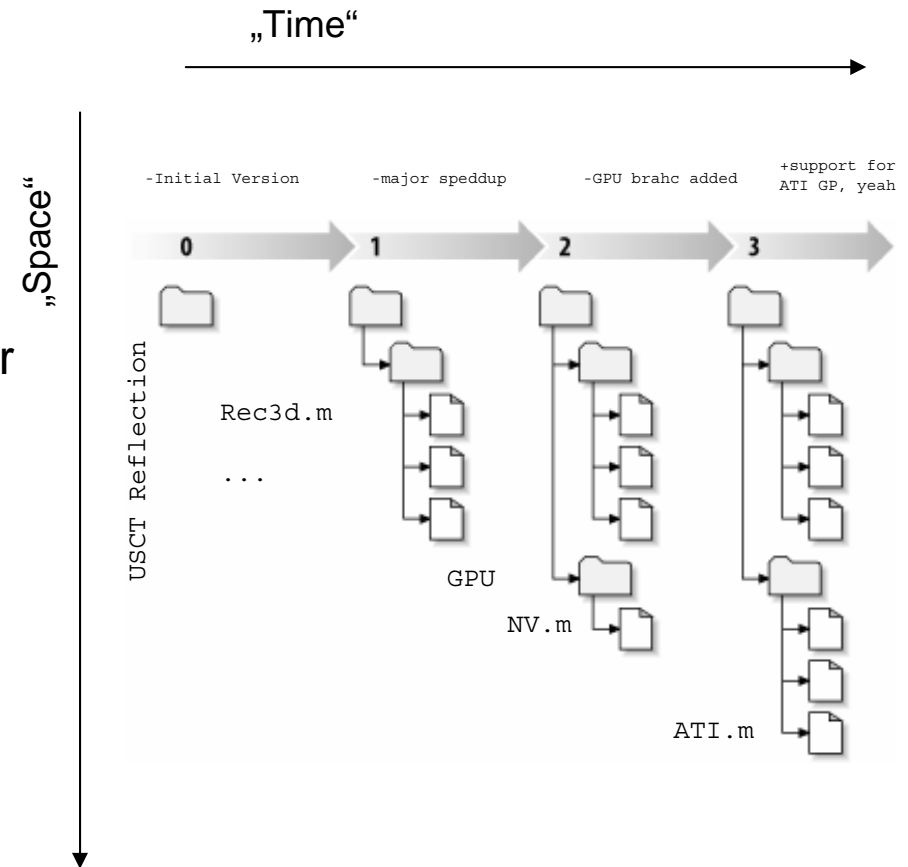

Concept 2: Teams

- Typically, software is produced by 1 genius hacker
 - By definition „In sync“
 - Structure clear and perfect
 - No bugs
- Sadly, there are not enough „genius“ hacker available (or projects getting nowadays bigger? ;))
 - A group of software guys has to cooperate in a software project
- Separation of code parts not always perfectly possible, also interface has to exist (and tested)
- **Concurrent** Code changes happens more likely the more people are involved or the software project size grows
- Some mechanism for handling that situation are required!

Concept 2: Teams - Traditional

- First, traditional approach
 - Exclusive access: lock and free of files
 - Disadvantages
 - Limits developer, discipline required
 - Same as all resource allocators... forgotten frees
 - Workaround happens too often/too easy, forking (copying of locked file) without merging
- Not practical, not working!

Concept 2: Teams - CVS

- Concurrent Versioning System (CVS), first one, defines concepts
- Concept: „*most of the times the overlap is small -> hope for the best!*“
- Consequent -> everyone gets an complete copy („**check out**“) of everything from some central place („**repository**“)
 - Allow everyone to do everything on his copy („**local copy**“), BUT LOG THIS CHANGES
- Integration of changes („**check in**“)
 - check if changed parts overlapping with changes from some other developer since checkout („**update**“)
 - If „no“ merge the code („**check in**“), and hope there is no functional mismatch!
 - If „yes“, cry for manual help („**conflict**“), but provide tools for resolving

Best practices/consequences

■ Usage style

- Fine grained Check in's, do it often, trust the system!
 - Reduces chances for conflicts... really!
 - Makes understanding of changes simpler for other authors
 - Makes Fixing simpler (in the seldome case something broke)
- But, don't expect mircales
 - An version control system is not an Code-review system, nor an statical (or even dynamicla) code analyse tool... it has no clou about the code!
- Practical, it works
 - even for Million line code projects with hundreds of programmers
 - severe problems are seldom